

41

**SERVICE  
MANUAL** 2220B

**m**a**r**a**n**t**z**

model 2220B

*Stereophonic Receiver*

## TABLE OF CONTENTS

SECTION	PAGE
Introduction .....	1
Service Notes .....	1
AM Tuner .....	1
FM Tuner .....	1
Phono and Pre-amplifier .....	3
Main Amplifier .....	4
Audio Trouble Analysis .....	4
Test Equipment Required for Servicing .....	5
AM Alignment Procedure .....	5
FM Alignment Procedure .....	6
Stereo Separation Alignment .....	6
Muting Threshold Adjustment .....	6
Power Amplifier Adjustment .....	6
Power Supply Adjustment .....	6
Service Information for European Model .....	28

## LIST OF ILLUSTRATIONS

FIGURE	PAGE
1. Dial Stringing .....	4
2. Front Panel Adjustment and Component Locations .....	7
3. Main Chassis Component Locations (Top View) .....	7
4. Rear Panel Adjustment and Component Locations .....	8
5. Main Chassis Component Locations (Bottom View) .....	8
6. FM Front End and AM Tuner Assembly P100 Component Locations .....	9
7. FM IF Amplifier, Detector, Muting Control and Meter Amplifier Unit Assembly P200 Component Locations .....	9
8. MPX Stereo Decoding Amplifier Assembly P300 Component Locations .....	10
9. Phono Amplifier Assembly P400 Component Locations .....	10
10. Power Amplifier Assembly P700 Component Locations .....	11
11. Power Supply Assembly P800 Component Locations .....	11
12. Dial Lamp Assembly PZ01 Component Locations .....	12
13. Tone Amplifier Assembly P500 Component Locations .....	12
14. Filter Assembly PH01 Component Locations .....	13
15. Main Remote Assembly PT01 Component Locations .....	13
16. Exploded Mechanical Diagram .....	14
17. Schematic Diagram .....	16
18. Rear Panel Adjustments and Facilities Locations for European Model .....	29
19. Main Chassis Component Locations (Bottom View) for European Model .....	29
20. Voltage Conversion Chart .....	30
21. Schematic Diagram for European Model .....	31

## INTRODUCTION

This service manual was prepared for use by Authorized Warranty Stations and contains service information for Marantz Model 2220B Stereophonic Receiver.

Servicing information and voltage data included in this manual are intended for use by the knowledgeable and experienced technician only. All instruction should be read carefully. No attempt should be made to proceed without a good understanding of the operation in the receiver.

The part lists furnish information by which replacement part may be ordered from the Marantz Company. A simple description is included for parts which can be usually be obtained through local suppliers.

### 1. SERVICE NOTES

As can be seen from the circuit diagram, the chassis of Model 2220B consists of the following units. Each unit mounted on a printed circuit board is described within the square enclosed by a bold dotted line on the circuit diagram.

1. FM Front End & AM Tuner . . . . .	mounted on P.W.B. P100
2. FM IF Amplifier, Detector, Muting Control . . . . .	mounted on P.W.B. P200
3. MPX Stereo Decoding Amplifier . . . . .	mounted on P.W.B. P300
4. Phono Amplifier . . . . .	mounted on P.W.B. P400
5. Tone Amplifier . . . . .	mounted on P.W.B. PE01
6. TAPE Monitor, Mono, Low and High Filter Switch Unit . . . . .	mounted on P.W.B. PH01
7. Loudness, Muting, Main and Remote Switch Unit . . . . .	mounted on P.W.B. PT01
8. Power Amplifier . . . . .	mounted on P.W.B. P700
9. Power Supply . . . . .	mounted on P.W.B. P800
10. Dial Lamp Unit . . . . .	mounted on P.W.B. PZ01

### 2. AM TUNER

All components except ferrite bar antenna are mounted on a printed circuit board P100.

The AM signals induced in a ferrite bar antenna are applied to the RF amplifier section of the AM tuner IC H104 through a capacitor of C129 and amplified to the level required for overcoming the conversion noises, thus giving good S/N performance. The tuned circuits inserted in both out and input circuit of the RF amplifier assure very high image and spurious rejection performance. Thus amplified and selected AM signals are then applied to the converter section through a coupling capacitor C132. While the local oscillator voltage is injected through a capacitor C131, both AM signals and oscillating voltage are mixed and converted into 455KHz intermediate frequency. The resulting IF signal is applied to the first IF transformer L110 consisting of one ceramic filter and two tuned circuits.

The output of L110 is led to the IF amplifier/detector section of H104. The detected audio signal is obtained from PIN 11 of H104 and amplified to a required level (about 470 mV for 400Hz 30% mod.) by the amplifier H105 and fed to the function switch.

#### 2.1 Suggestions for AM Tuner Trouble Shooting

Check for broken AM bar antenna, next connect an oscilloscope to the pin 11 of H104 or J112 and check for audio signals with the tuning meter deflected. If detected audio signal is obtained at pin 11 of H104, no failure may exist in the AM tuner IC H104 and its associated circuit. If no audio signal is obtained at pin 11 of H104, check all voltage distribution in the AM circuits by using a DC VTVM.

### 3. FM TUNER

The FM Tuner section of Model 2220B is divided into three functional blocks: FM front end, IF amplifier & Detector, Muting control and MPX stereo decoding circuit.

FM signals induced on a FM antenna are led to FM antenna coil L101 through a balun coil. These signals are then applied to the FET RF amplifier which in turn applies its output to the next Transistor Mixer H102 through the double tuned high selective circuits. The Mixer convert its input signal into 10.7MHz intermediate frequency and amplifies it at the same time. The H103 is a local oscillator and its output is injected into the base of Mixer transistor, the injection voltage is about 50mV. The 10.7MHz front end IF output is led to the next IF amplifier unit through a coaxial cable.

The IF amplifier unit consists of five stages of IF amplifiers. Two pieces of ceramic filters are used to obtain high selectivity a pair of symmetrical diode limiter is also employed for the best limiting characteristics, improved capture ratio and good AM suppression.

A part of IF amplifier H202 is rectified by the diodes H211 and H212 and its DC output is fed back to the gate of FET RF amplifier to decrease the gain of it with increased input signal strength.

### **3-1. Muting and Auto-Stereo Switching Circuits**

The muting circuit consisting of all solid-state electrical switching has been incorporated in the Model 2220B.

The DC voltage obtained by rectifying the sub IF output signal from the H206 is applied to the base of H207 and turns on it, if the sub IF output is greater than predetermined level (muting threshold level).

When the H207 turns on, the muting switch transistor H208 is turned on, thus decreasing the emitter collector resistance to near zero ohm and allowing emitter current path to the Final IF amplifier H205.

When the input signal is lower than the predetermined level, the DC output obtained is small and can not turn on the H207 thus the H207 keeps its turn off state and this makes the switch transistor keep H208 turn off, then no emitter current is supplied to the H205 and signals below the threshold level are muted out.

The muting threshold level can be varied by adjusting the trimming resistor R253.

The DC voltage obtained is also used to make the Auto-Stereo switching transistor H209 turn on and off.

### **3-2. MPX Stereo Decoding Circuit**

The stereo composite signal from the FM detector undergoes a phase compensation by R303 and C304, is applied to the input terminal pin 2 of the MPX stereo decoding IC H301 on a PLL (Phase Locked Loop) basis, and decoded into the left and right stereo signals, which become available at pins 4 and 5 respectively. These decoded left and right stereo audio signals are introduced through a low pass filter composed of L301 to L304 and C309 to C318 for elimination of undesirable residual switching signal and through a de-emphasis network consisting of R314, R315, C319 and C320, into the npn-pnp direct coupled audio amplifier, where the signals are amplified to a required level for the output from J307 and J308. From these terminal the audio signals are led to the TAPE OUTPUT jacks through the function switch. Figure 1 presents an internal block diagram showing the functions of the PLL basis MPX stereo decoding IC HA1156. The input stereo composite signal, amplified by the audio amplifier, is delivered to the phase detectors PD-1 and PD-2. A part of the stereo composite signal is also applied to the stereo decoder section. The VCO (Voltage Control Oscillator) produces a free run oscillation in the neighborhood of 76KHz with the time constant determined by a capacitor C303 and resistors R304 and R305 set on the outside of pin 14. The VCO output has its frequency divided into 19KHz through the two stages of the frequency divider (DIV-1 & DIV-2), and is reverted to the phase detector PD-1, which contains two input terminals designed to produce an output in proportion to the product of the two input signals. The signal applied to one of the inputs of PD-1 is the 19KHz square wave formed through frequency division of the 76KHz VCO output signal by the two stages of the frequency divider

DIV-1 and DIV-2, and the 19KHz pilot signal included in the stereo composite signal as a reference signal is applied to the other input. Therefore, the output of PD-1 which has passed through the low pass filter LPF-1 provides DC output voltage in proportion to the phase variance between the two inputs. This DC output voltage is amplified by the DC amplifier, and supplied to the 76KHz VCO as a control voltage. This means that the output frequency and phase of the VCO have been phase-locked to the input pilot signal. The 38KHz sub-carrier reproduced by PLL as stated above is delivered through the stereo switch to the stereo decoder section as a switching signal, thus driving the decoder section. One of the inputs of PD-2 is given the 19KHz resulting from the frequency division completed by DIV-1 and DIV-3, whereas the other input gets the 19KHz output contained in the composite signal, and the output is provided with a DC output in proportion to the amplitude of the pilot signal. This DC output is furnished through LPF-2 to the trigger amplifier which drives the stereo indicator lamp and stereo switch. Therefore, insufficient supply of the pilot signal results in failure to light the stereo indicator and to turn on the stereo switch located in the path of the 38KHz switching signal, thereby avoiding a wrong stereo operation. H303 attached on the outside of pin 8 is a switching transistor for automatic monaural-stereo switchover. When the intensity of an incoming signal from an FM station is weaker than a predetermined level, this H303 is turned on and pin 8 is grounded, thereby developing a condition for monaural reception. For a forced monaural operation, switch the MODE switch to "NONO," an H303 comes into an "On" condition with the positive bias voltage applied to the base, and pin 8 is grounded, thereby establishing monaural operation. The transistor H302 connected externally to pin 14 is intended to stop the 76KHz oscillation of the VCO Which interferes an AM signal during the reception of an AM station. When the function switch is set to "AM" position, a positive bias is charged on the base of H302, H302 is turned on, and pin 14 is grounded. Thus, the oscillation of the VCO is stopped, ending the interference with AM reception.

### 3.3 Suggestion for Trouble Shooting of FM Tuner

#### 3.3.1 Symptom: No FM Reception

First turn ON the power switch and try to tune FM stations. Rotate the fly-wheel tuning knob slowly and observe the FM tuning meter. If the turning meter deflect at several frequencies received, the tuner circuits preceding the discriminator circuit may have no failure. When no reading is obtained in the meter, check FM local oscillator circuit, using a RF VTVM. The normal local oscillator voltage is one or two volts (rms) at the tuning capacitor, depending on the tuning capacitor position. If the local oscillator voltage is normal, next check all voltage distributions in the FM Front End and IF amplifier unit and compare them with those shown in the circuit diagram. When the tuning meter deflects but no sound is obtained, check audio circuits, using a high sensitive oscilloscope.

#### 3.3.2 Symptom: No Stereo Separation

First check the "MONO" switch is in normal out position. Connect a FM RF signal generator output modulated by a stereo modulator to the rear FM antenna terminals, and check the stereo beacon is turned on or not. If not turned on, check for 19KHz VCO output signal (R312 Test Point), using an oscilloscope and a frequency counter.

## 4. PHONO AND PRE-AMPLIFIER

Signals from the tuner and AUX jacks are applied to the selector switch. Signals from the PHONO jacks are applied to the phono-amplifier consisting of transistor H401, H403 and H405. The gain of the amplifier is 40 dB. The amplified and equalized phono-signals are, then, fed to other section of the selector switch which, in turn, applies output signals from the tuner, phono-amplifier and AUX jacks to the TAPE 1 MONITOR switch and TAPE OUT 1 jacks. The TAPE 1 MONITOR switch applies the signals to the balance and volume controls.

The controlled signals are fed to the pre-amplifier consisting of HE01, HE03 and HE05,

HE07. Frequency response of the amplifier can be varied by BASS, MID and TREBLE controls. The controlled output are then led to the main amplifier through high and low pass filter pushswitches.

## 5. MAIN AMPLIFIER

Transistor H701 and H703 are a differential amplifier coupled to the transistor H707. Transistor H707 drives the inverter transistors H721 and H723 which, in turn, drive the power stage consisting of H001 and H002. Transistors H709 and H721 are current limiters and operate as power protecting circuits.

Excessive currents flowing into the power stage are detected by the resistors R749 and R747 and the resultant variations are applied to the transistors H709 and H711 and make them turned on. This decreases the current flowing into the H721 and H723. In this way the currents flowing in the power stage (H001 and H002) are restricted within a safe value.

## 6. AUDIO TROUBLE ANALYSIS

1. Excessive line consumption
  - a. Check for shorted rectifiers H801, H802.
  - b. Check for shorted transistors H001, H002, Check L005 for short.
  - a. Check line cord, fuse, shorted H005, H006, H725.
  - b. Check for open rectifiers H801, H802 or open L005.
  - a. Check filter capacitors C002, C004.
  - a. Check for defective capacitors, C707, C708, C715, C716.
  - a. Check for proper adjustment of R711, R712.
2. No line consumption or zero bias
3. High hum and noise level
4. Parasitic oscillation
5. Improper clipping

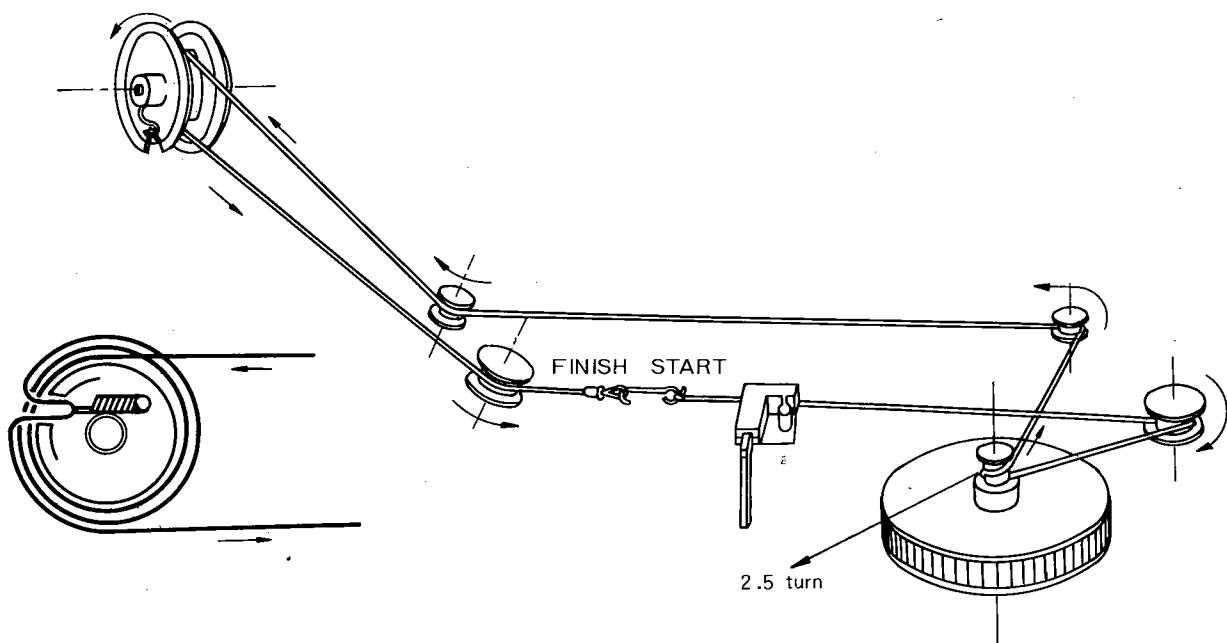


Figure 1. Dial Stringing

## 7. TEST EQUIPMENT REQUIRED FOR SERVICING

Table 1 lists the test equipment required for servicing the Model 2220B Receiver.

Item	Manufacturer and Model No.	Use
AM Signal Generator		Signal source for AM alignment
Test Loop		Use with AM Signal generator
FM Signal Generator	Less than 0.3% distortion	Signal source for FM alignment
Stereo Modulator	Less than 0.3% distortion	Stereo Separation alignment and trouble shooting
Audio Oscillator	Weston Model CVO-100P, less than 0.02% residual distortion is required.	Sinewave and squarewave signal source.
Frequency Counter		MPX Oscillator adjustment (VCO)
Oscilloscope	High sensitivity with DC horizontal and vertical amplifiers.	Waveform analysis and Trouble Shooting, and ASO alignment.
VTVM	With AC, DC, RF range	Voltage measurements.
Circuit Tester		Trouble Shooting
AC Wattmeter	Simpson, Model 390	Monitors primary power to Amplifier.
AC Ammeter	Commerical Grade (1-10A)	Monitors amplifier output under short circuit condition.
Line Voltmeter	Commercial Grade (0-150VAC)	Monitors potential of primary power to amplifier.
Variable Autotransformer (0-140VAC, 10 amps.)	Powerstat, Model 116B	Adjusts level of primary power to amplifier.
Shorting Plug	Use phono plug with 600 ohm across center pin and shell.	Shorts amplifier input to eliminate noise pickup.
Output Load (8 ohms, 0.5%, 100W)	Commercial Grade	Provides 8-ohm load for amplifier output termination.
Output Load (4 ohms, 0.5%, 100W)	Commercial Grade	Provides 4-ohm load for amplifier output termination.

## 8. AM ALIGNMENT PROCEDURE

### AM IF Alignment

1. Connect a sweep generator to the J106 and an alignment scope to the resistor R120 (outside).
2. Rotate each core of IF transformers L110 and L111 for the maximum height and flat top symmetrical response.

### AM Frequency Range and Tracking Alignment

1. Set AM signal generator to 515 KHz. Turn the tuning capacitor fully closed (place the tuning pointer at the low end) and adjust the oscillator coil L109 for maximum audio output.
2. Set the signal generator to 1650 KHz. Place the tuning pointer in the high frequency end and adjust the oscillator trimmer on the oscillator tuning capacitor for maximum audio output.
3. Repeat step 1 and 2 until no further adjustment is necessary.
4. Set the generator to 600 KHz, tune the receiver to the same frequency and adjust a slug core of AM ferrite rod antenna and RF coil L108 for maximum output.
5. Set the generator to 1400 KHz and tune the receiver to the same frequency and adjust both trimming capacitor of antenna and RF tuned circuit for maximum output.

6. Repeat procedures 4 and 5 until no further adjustment is necessary.

Note: During tracking alignment reduce the signal generator output as necessary to avoid AGC action.

#### **9. FM ALIGNMENT PROCEDURE**

1. Connect a FM signal generator to the FM antenna terminals and an oscilloscope and an audio distortion analyzer to the tape output jack on the rear panel.
2. Set the FM SG to 87 MHz and provide about 3 to 5 $\mu$ V. Place the tuning pointer at the low frequency end by rotating the tuning knob and adjust the core of oscillator coil L104 to obtain maximum audio output.
3. Set the FM SG to 109 MHz and provide about 3 to 5 $\mu$ V. Rotate the tuning knob and place the tuning pointer at the high frequency end and adjust the trimming capacitor C118 for maximum output.
4. Repeat steps 2 and 3 until no further adjustment is necessary.
5. Set the FM SG to 90 MHz and tune the receiver to the same frequency. Decrease signal generator output until the audio output level decreases with the decreasing generator output. Adjust the ANTENNA coil L101, RF coil L102 and L103 and IF transformer L105 for minimum audio distortion.
6. Set the FM SG to 106 MHz and tune the receiver to the same frequency. Decrease the signal generator output until the audio output level decreases with the decreasing generator output. Adjust the trimming capacitors of ANTENNA and RF tuning circuits for minimum distortion.
7. Repeat steps 5 and 6 until no further adjustment is necessary.
8. Connect a DC VTVM with 1 V range selected to the resistor R237 (inside) and adjust the secondary core (black) of discriminator transformer L201 so that no voltage reading is obtained on the VTVM at no signal. Next set the FM SG to 98 MHz and increase the output level 1 K $\mu$ V, then tune the receiver to the same frequency so that no deflection is obtained on the VTVM. Adjust primary core (pink) of L201 for minimum distortion.

#### **10. STEREO SEPARATION ALIGNMENT**

1. Set the FM SG to provide 1 K $\mu$ V at 98 MHz. Tune the receiver to the same frequency so that the center tuning meter pointer indicates its center. Then turn off the modulation of the FM SG, connect a frequency counter to test point R312 (point C) and adjust R 304 so that the frequency counter may precisely read 19 KHz.
2. Modulate the FM SG with stereo composite signal consisting of only L or R channel (of course a pilot signal must be included).
3. Adjust the trimming resistor R 303 for maximum and same separation in both channels.

#### **11. MUTING THRESHOLD ADJUSTMENT**

1. Set the FM SG output to provide 12.5 $\mu$ V(IHF) at 98 MHz and tune receiver to the same frequency. Adjust the trimming resistor R 253 for the threshold level of 12.5 $\mu$ V. (During this adjustment turn the MUTING pushswitch "on".)

#### **12. POWER AMPLIFIER ADJUSTMENT**

Connect a VTVM between J712(+) and J718(-) and adjust the trimming resistor R733 until the VTVM reads 20 mV DC. And next, connect a VTVM between J723 and J722 (GROUND) and adjust the trimming resistor R711 until the VTVM reads 0 mV DC. Do over again. For the other channel, connect the VTVM between J713(+) and J719(-) and adjust the R734 for the same reading, and connect the VTVM between J724 and J722 and adjust the R712 for the same reading. Do over again.

#### **13. POWER SUPPLY ADJUSTMENT**

Connect a VTVM between J812(+) and J811(-) and adjust R808 until the VTVM reads 35.0 V under no signal condition.

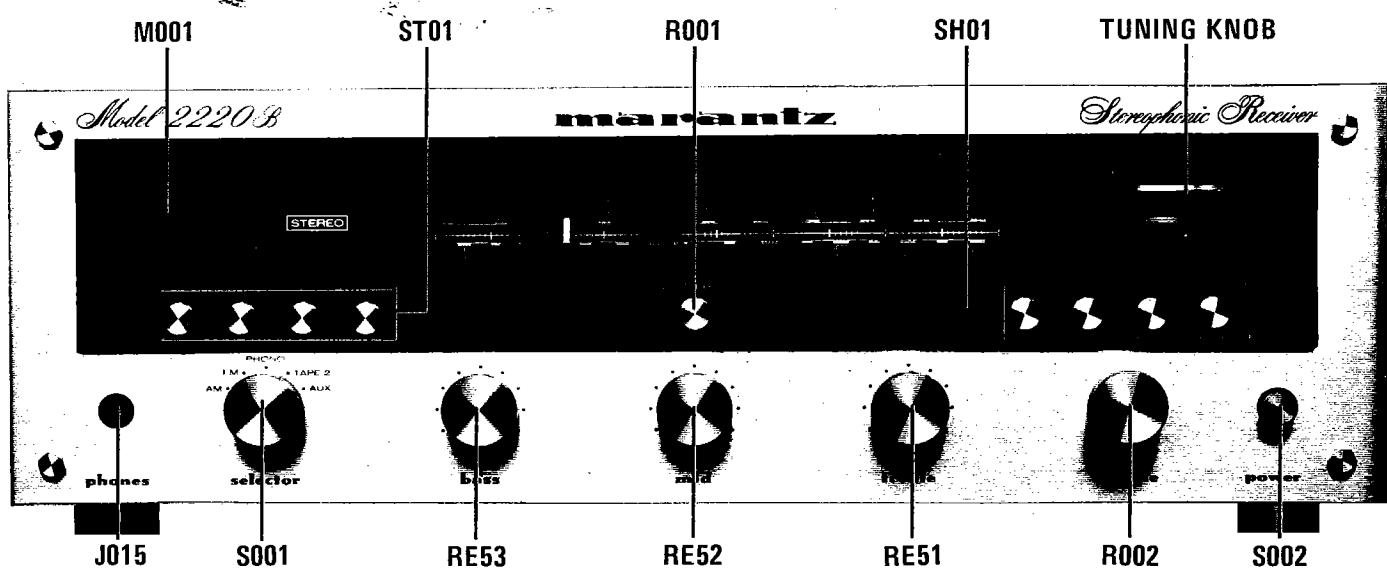


Figure 2. Front Panel Adjustments and Component Locations

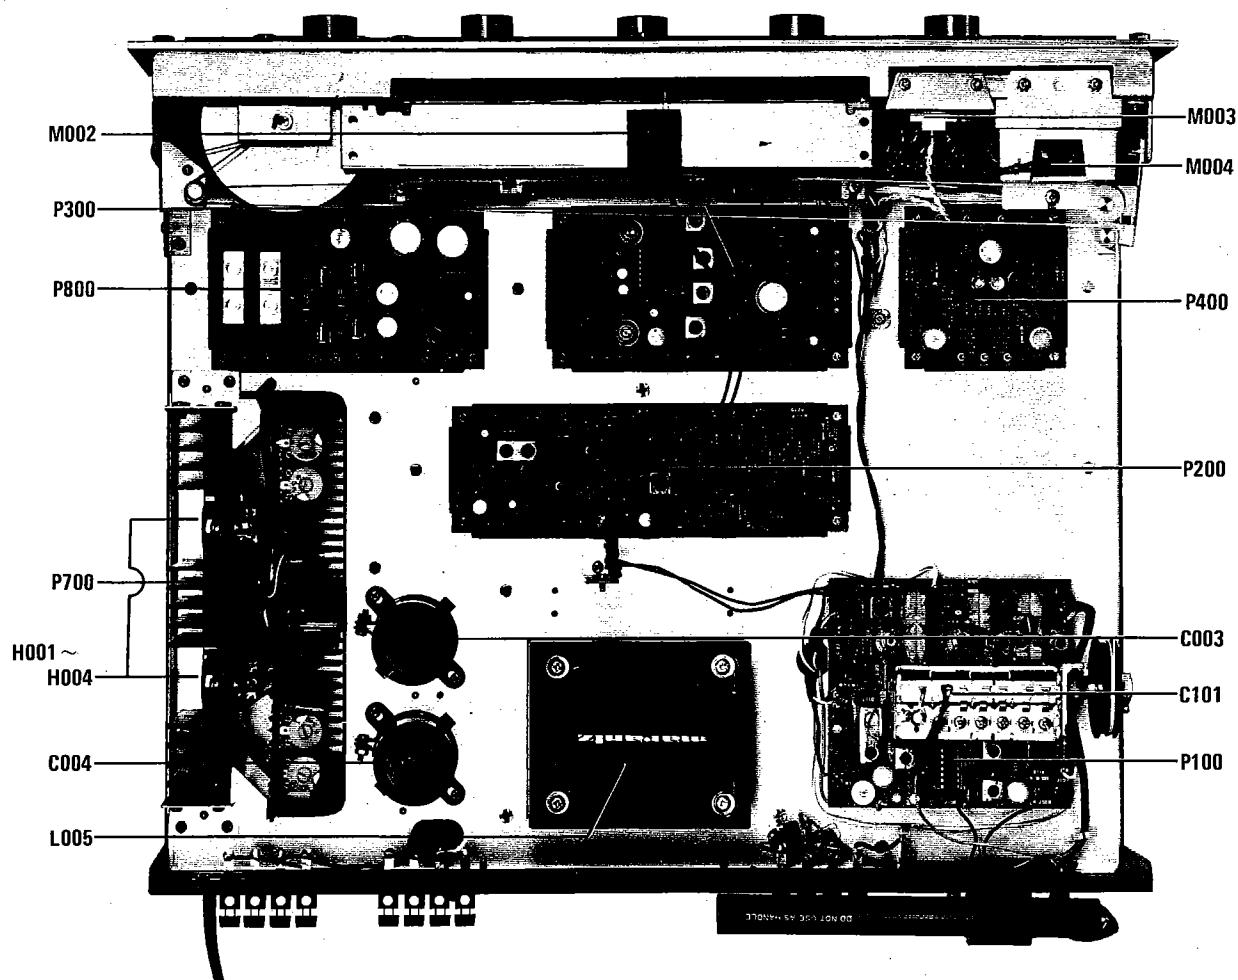


Figure 3. Main Chassis Component Locations (Top View)

**marantz**

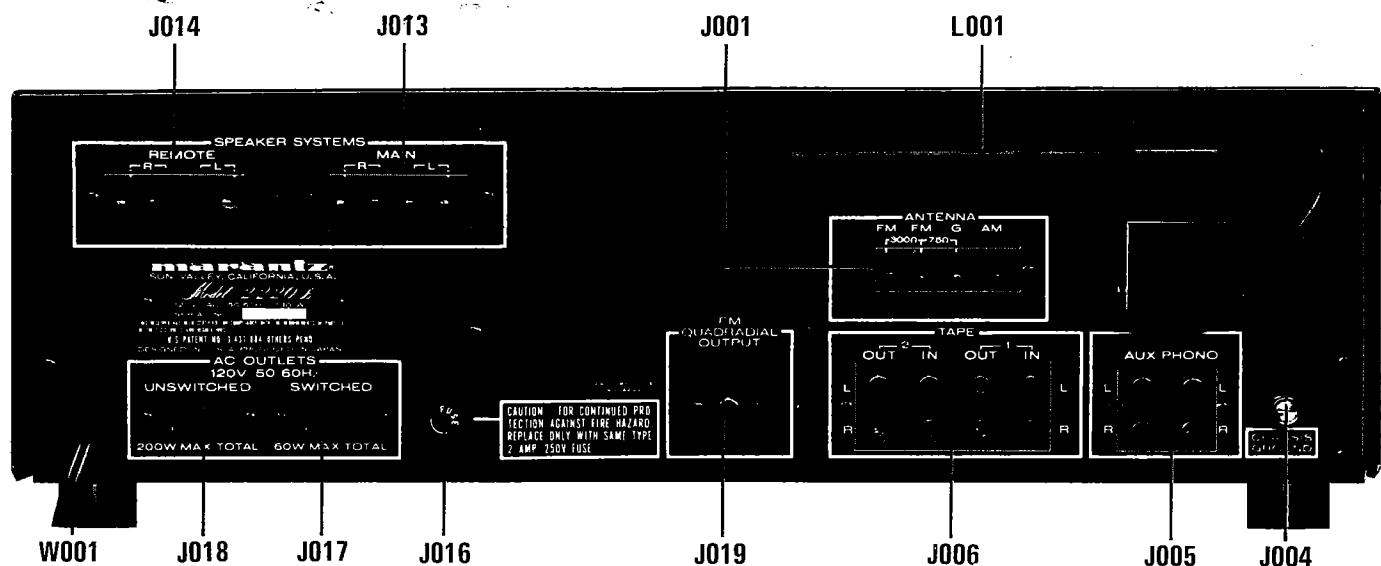


Figure 4. Rear Panel Adjustment and Component Locations

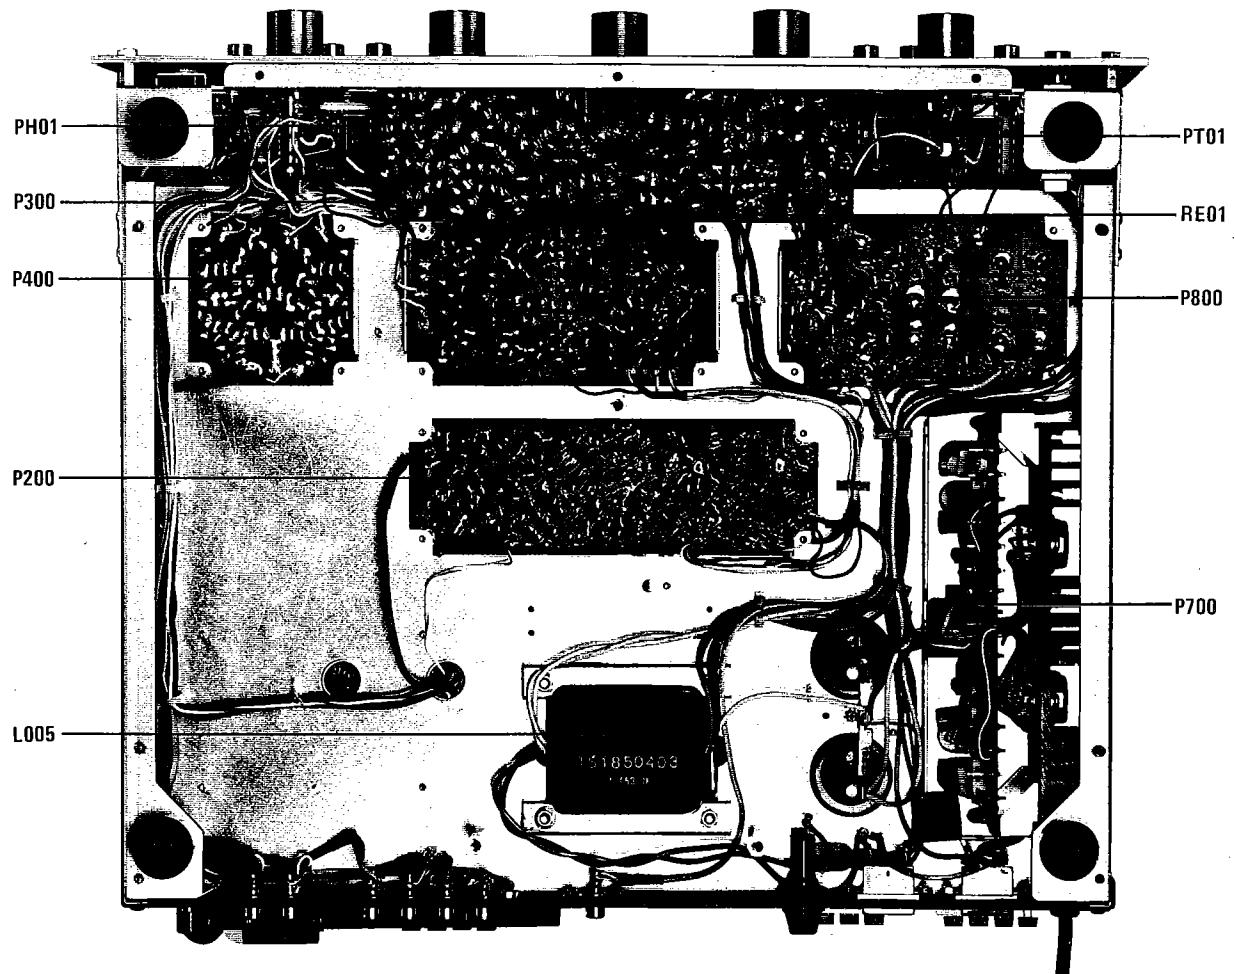


Figure 5. Main Chassis Component Locations (Bottom View)

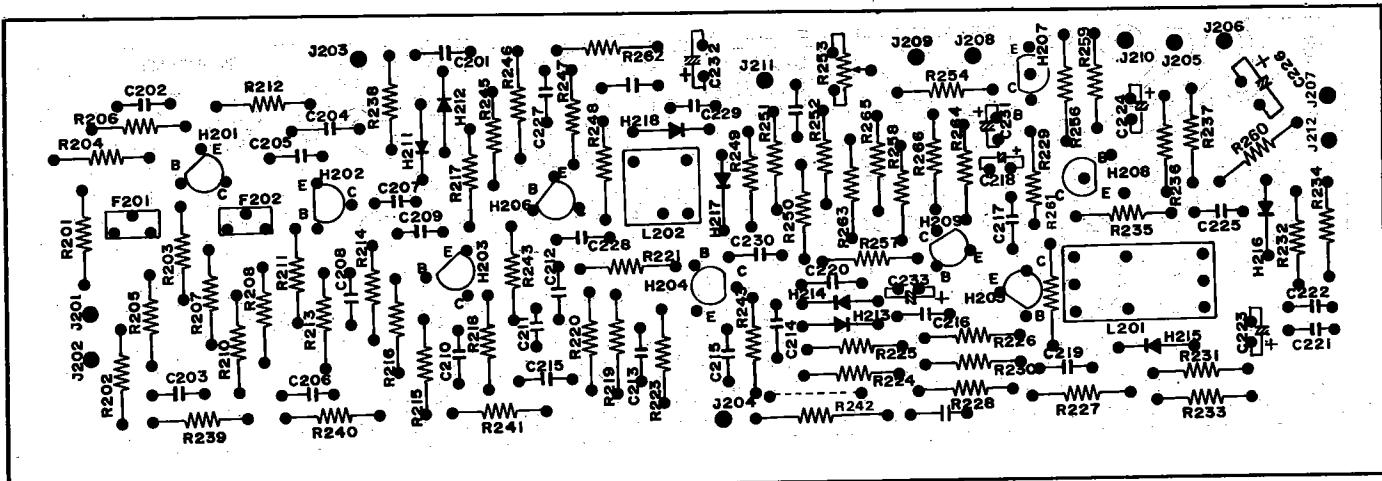


Figure 6. FM Front End and AM Tuner Assembly P100 Component Locations

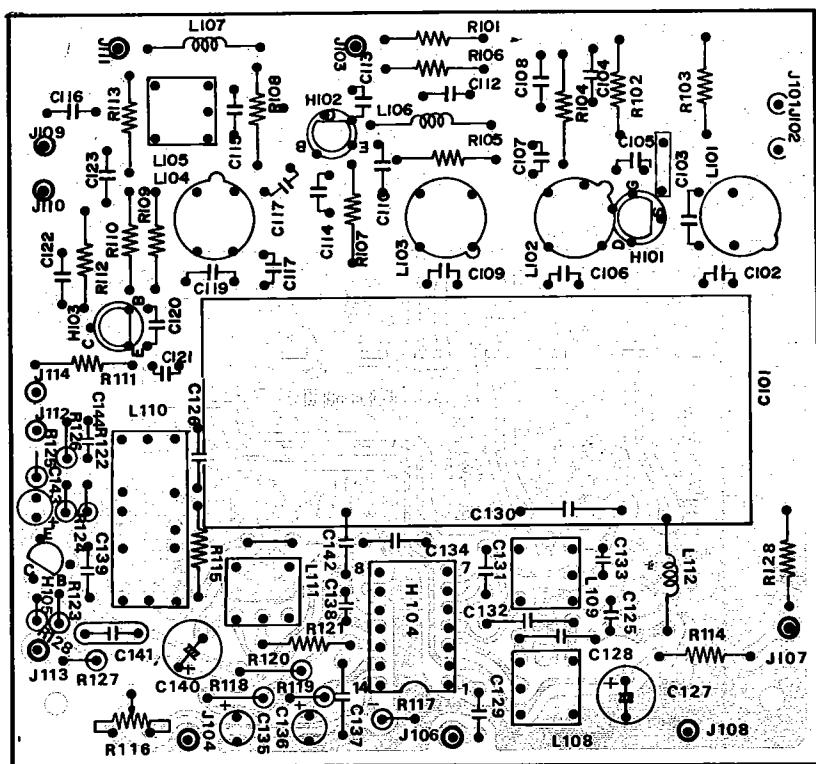


Figure 7. FM IF Amplifier, Detector, Muting Control and Meter Amplifier Unit Assembly P200 Component Locations

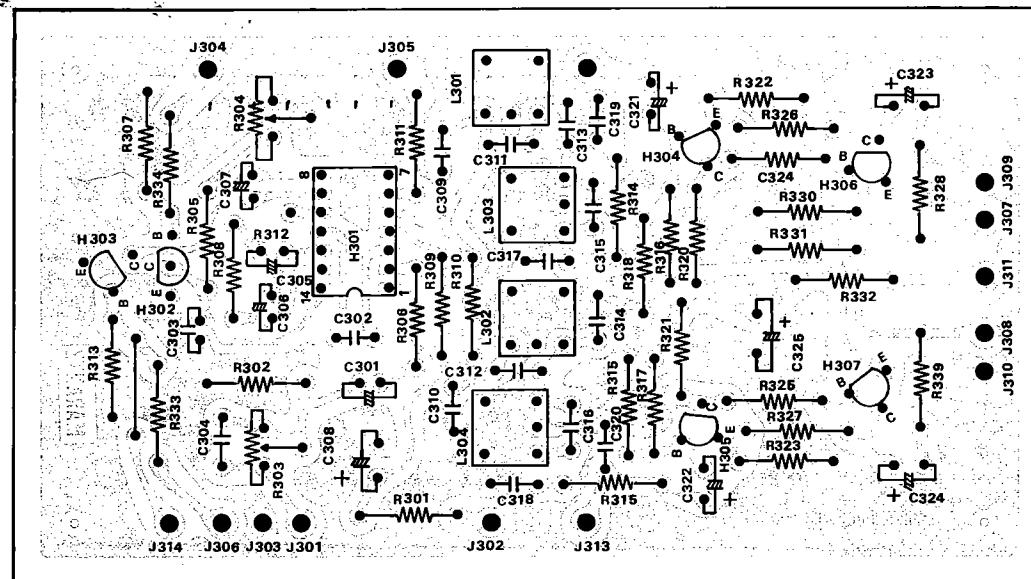


Figure 8. MPX Stereo Decoding Amplifier Assembly P300 Component Locations

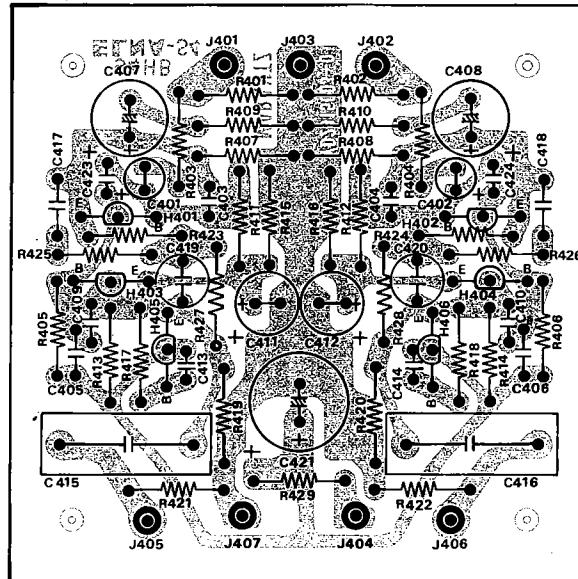


Figure 9. Phono Amplifier Assembly P400 Component Locations

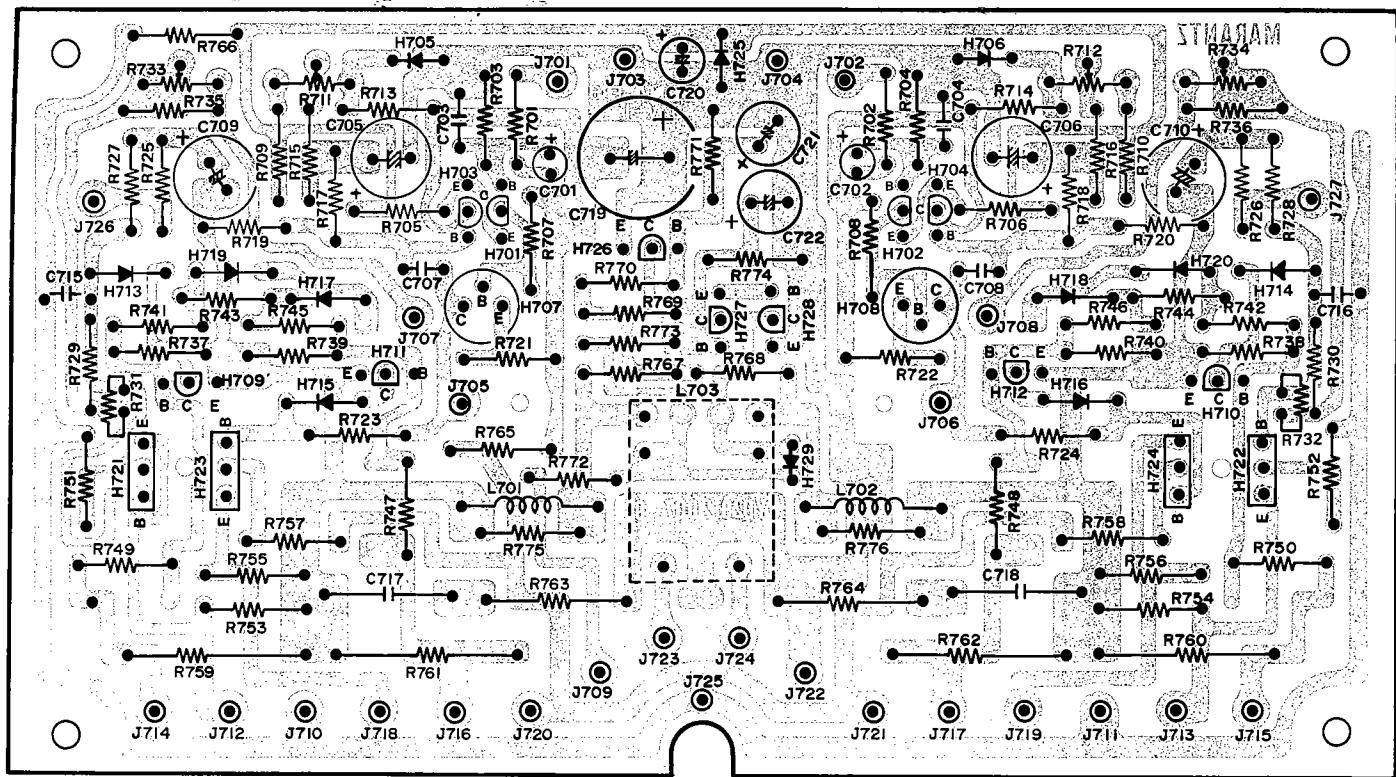


Figure 10. Power Amplifier Assembly P700 Component Locations

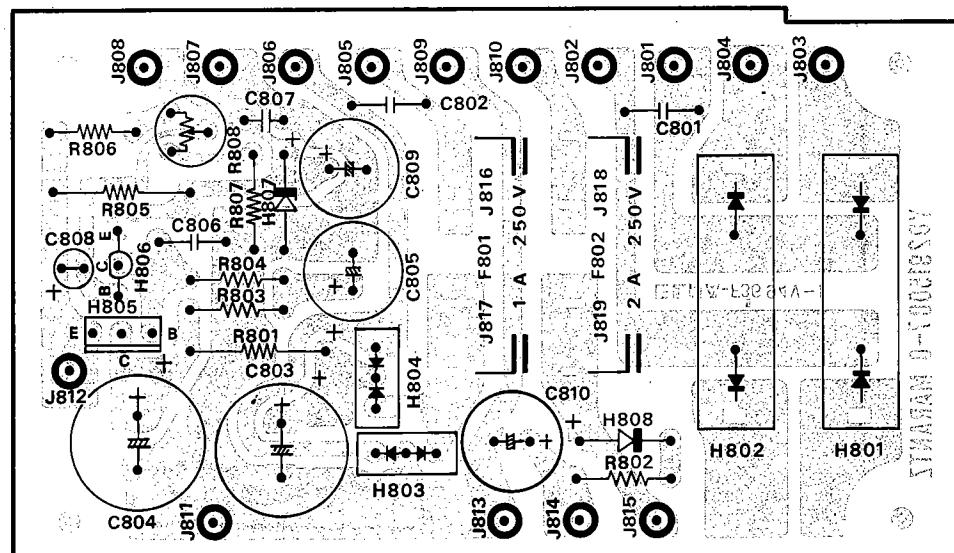


Figure 11. Power Supply Assembly P800 Component Locations

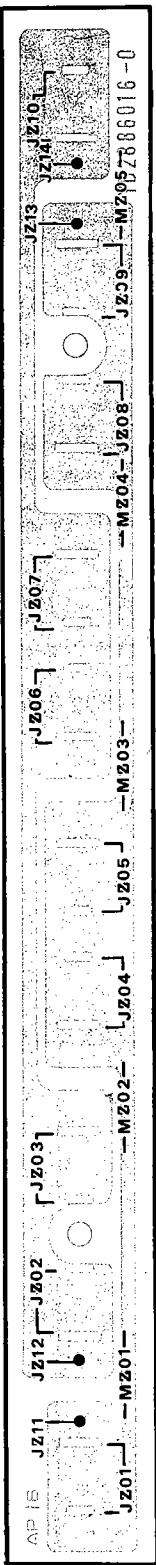


Figure 12. Dial Lamp Assembly PZ01 Component Locations

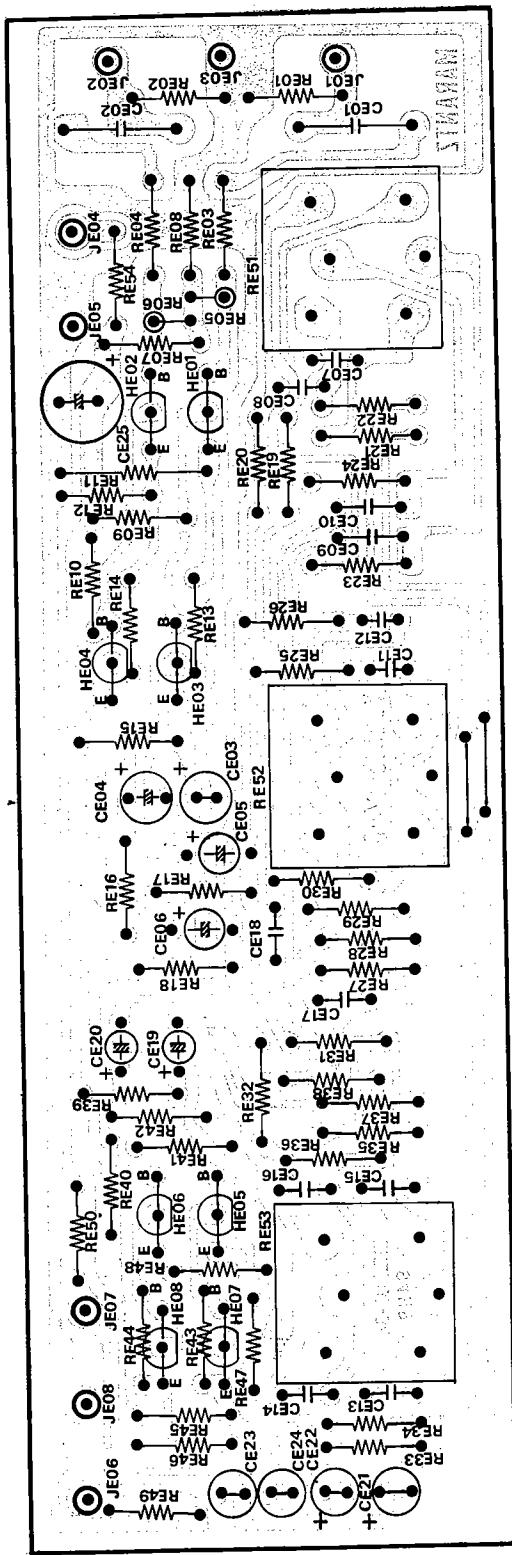


Figure 13. Tone Amplifier Assembly P500 Component Locations

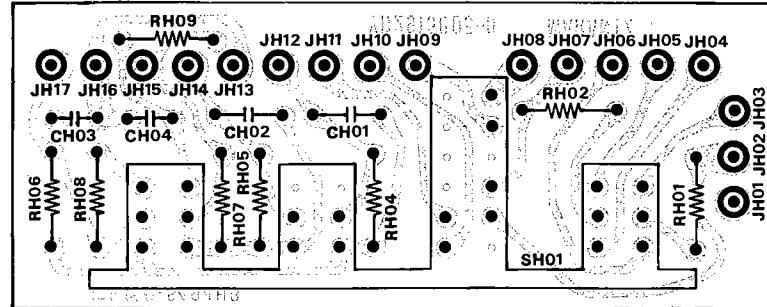


Figure 14. Filter Assembly PH01 Component Locations



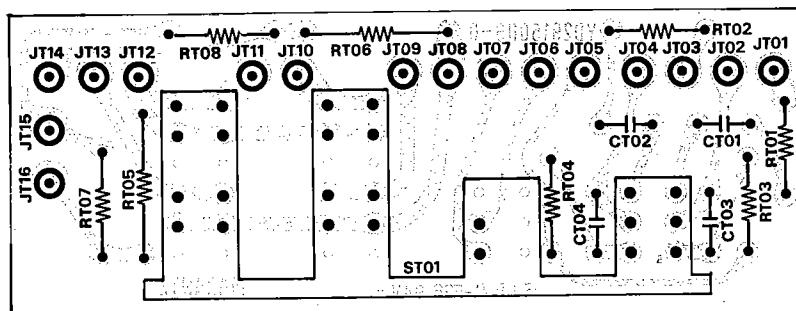


Figure 15. Main Remote Assembly PT01 Component Locations

**marantz**

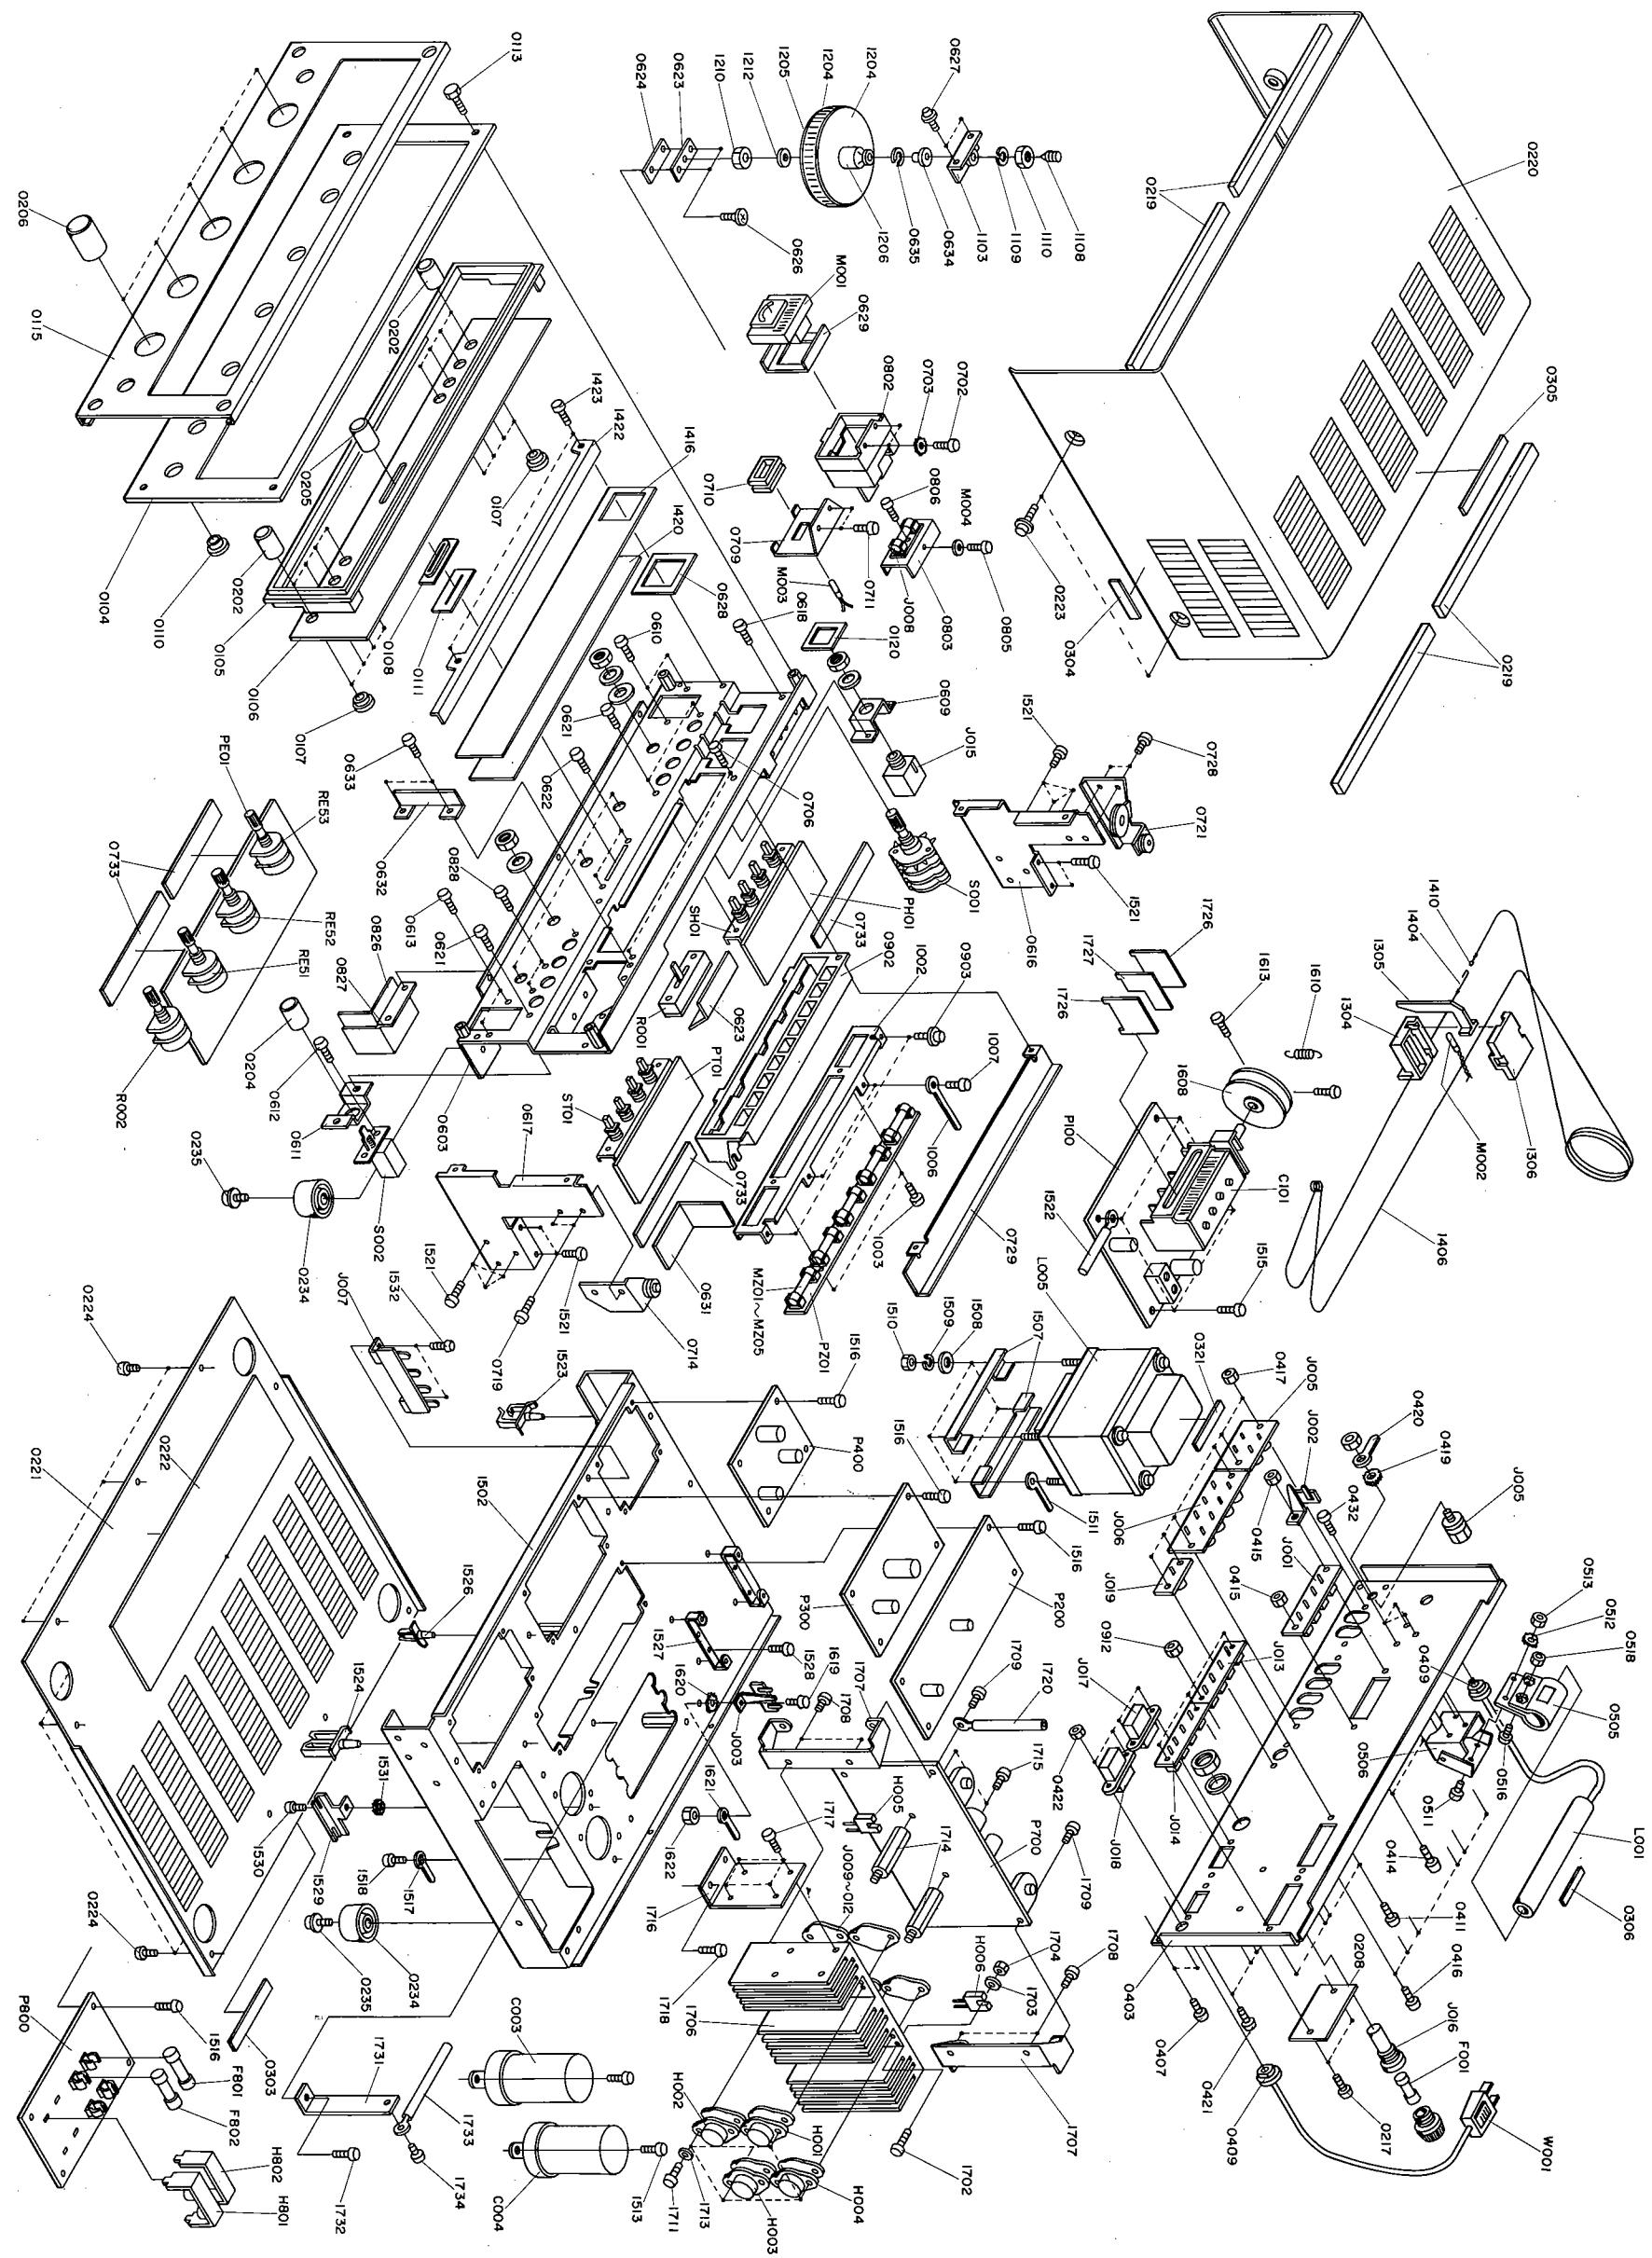

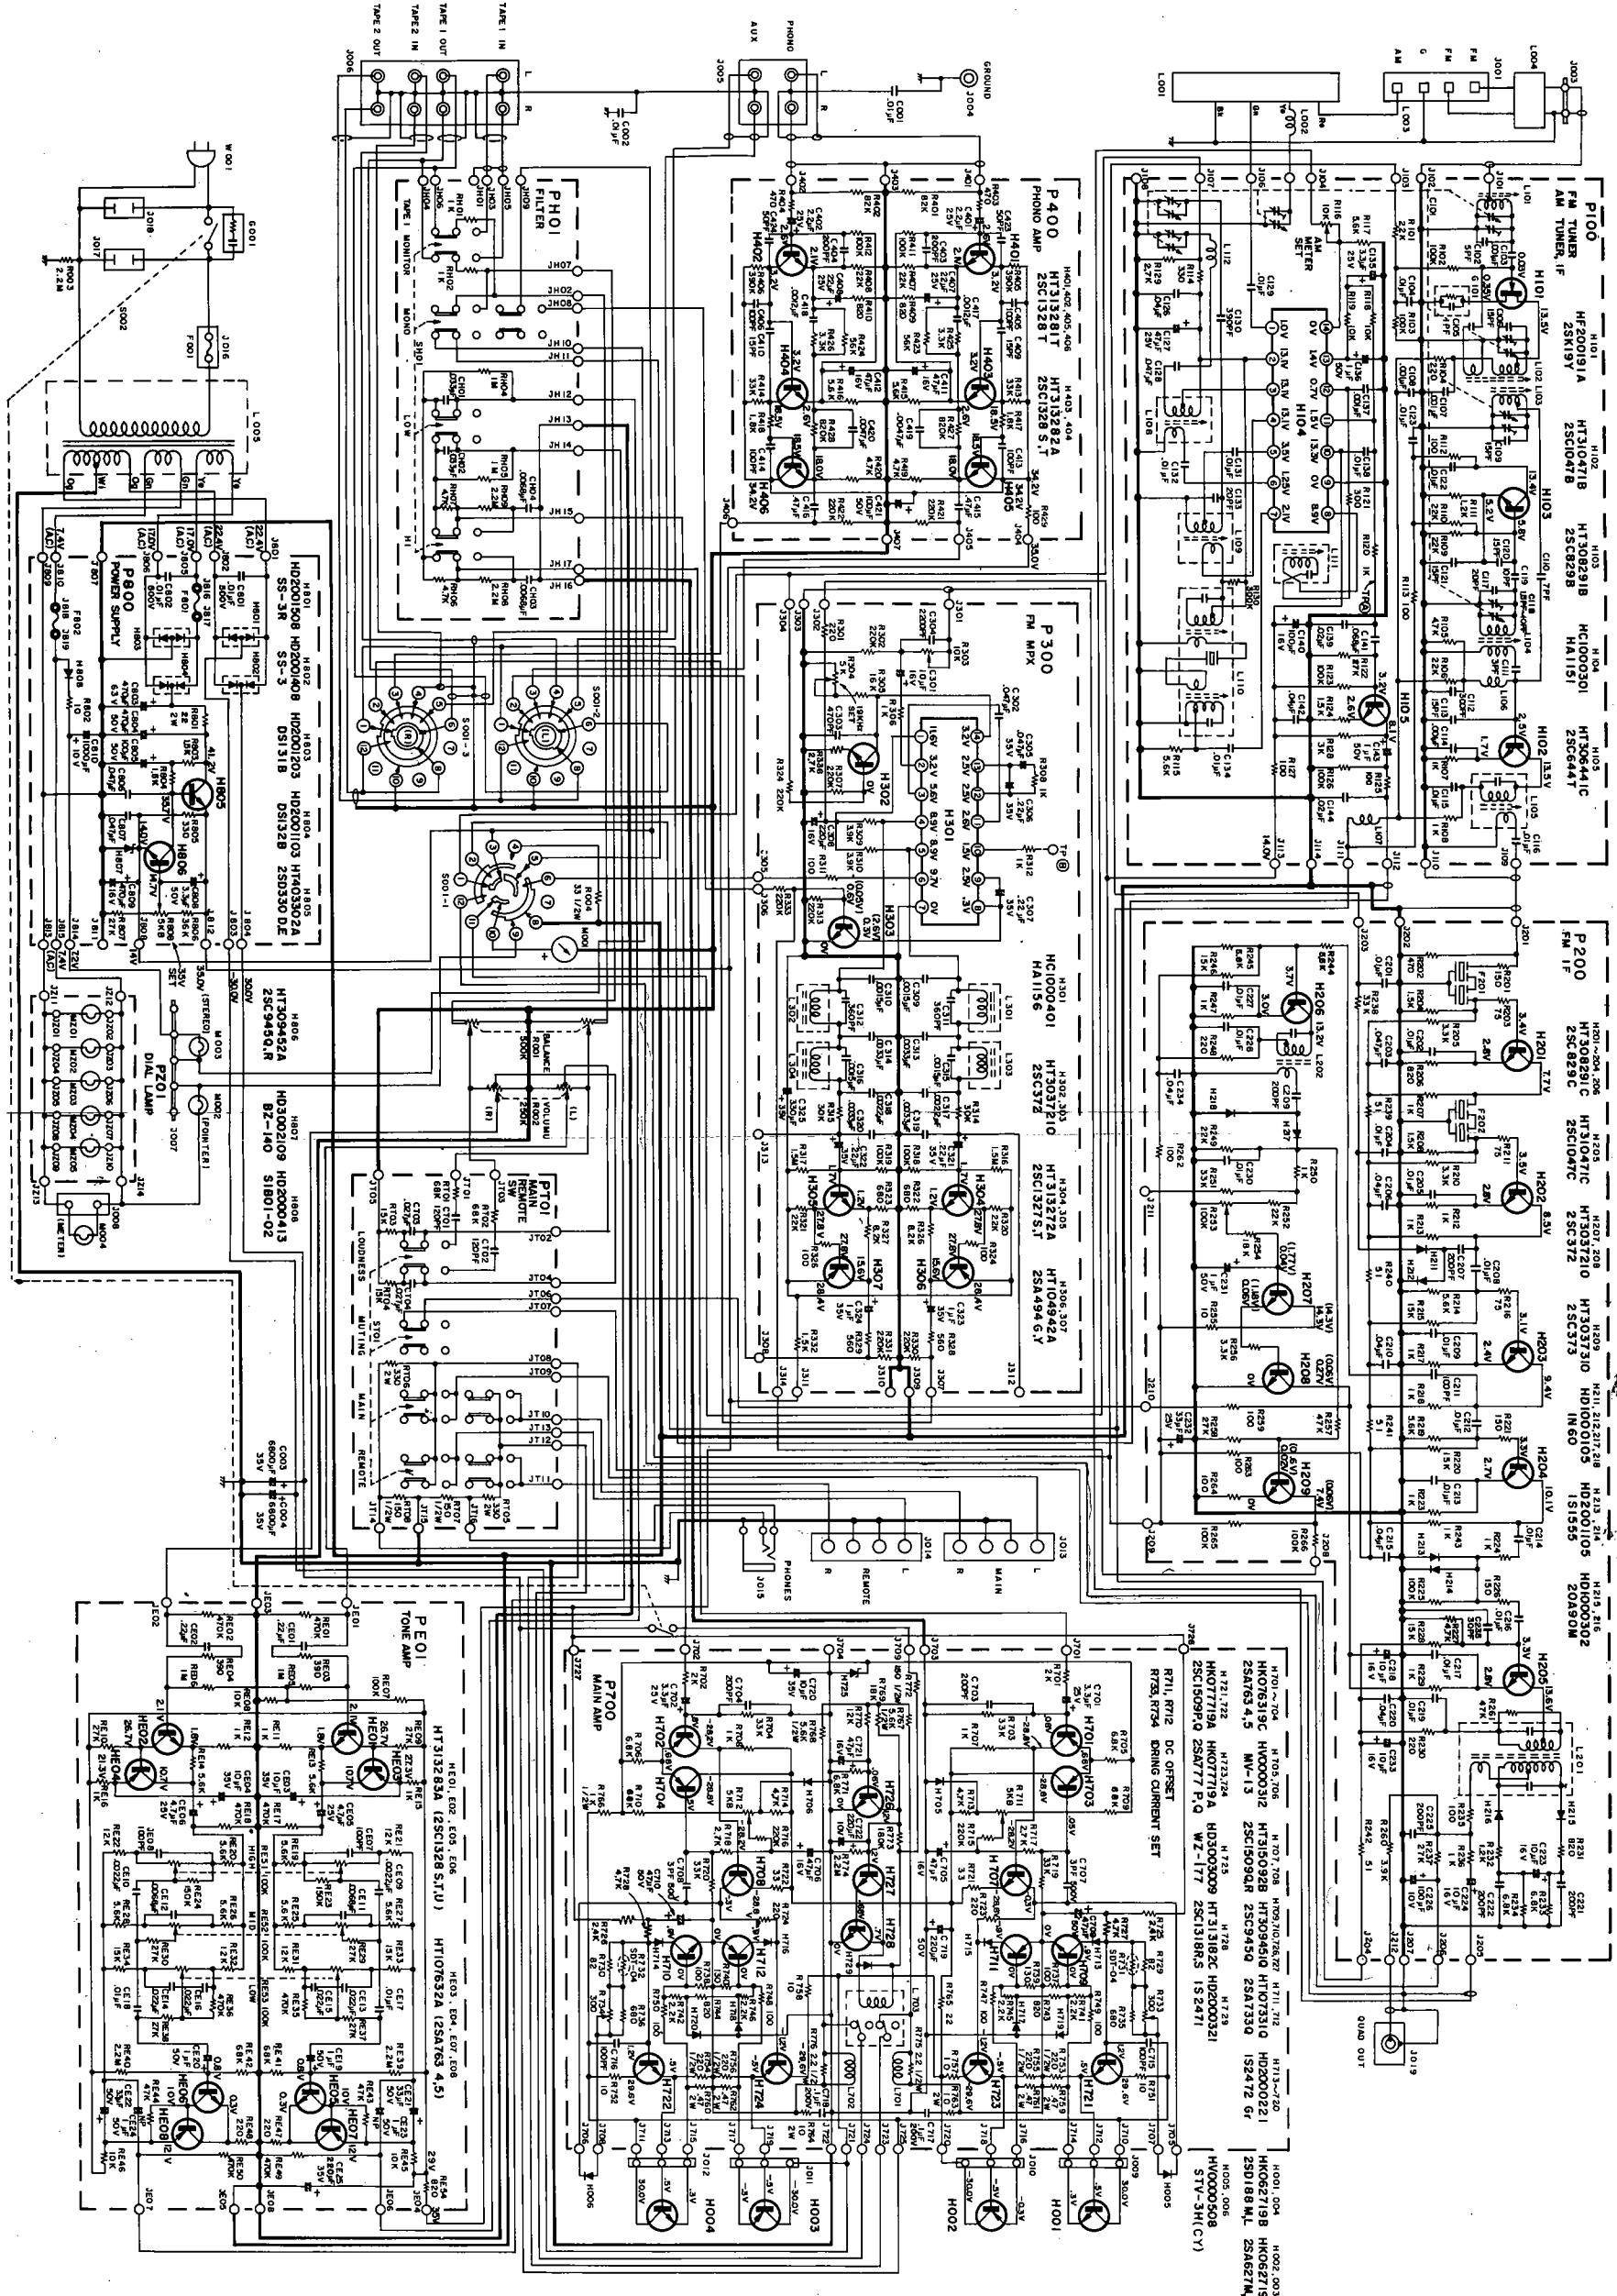

**Figure 17.** Schematic Diagram

**Parts List**

U: For U.S.A.  
E: For Europe

REF. DESIG.	U	E	PART NO.	DESCRIPTION
A	1	1	291506340	Front Panel Assembly
0104	1	1	291506301	Escutcheon
0105	1	1	2915340101	Frame
0106	1	1	C103	Window
0107	8	8	C104	Bush
0108	1	1	288625901	Bush
0110	1	1	281825905	Bush
0111	1	1	291510701	Sheet Cover
0115	1	1	291505301	Fly Wheel Assembly
B	1	1	288327340	Escutcheon
1204	2	2	257706302	Fly Wheel
1205	1	1	257727301	Shaft
1206	1	1	288311201	Hexagon Nut
1210	1	1	53110603E	Flat Washer
1212	1	1	54020601E	Pointer Assembly
C	1	1	291510340	Pointer
1304	1	1	291510301	Pointer
1305	1	1	281810302	Pointer
1306	1	1	291510302	Pointer
MC02	1	1	IN1008030	Lamp
D	1	1	120200640	Hook Assembly
1404	1	1	120225801	Hook
1406	1	1	72080802A	String
E	1	1	281915941	Drum Assembly
1608	1	1	281915901	Drum
1613	2	2	71101569M	Spring
P100	1	1	YD2888003	Set Screw
				P100 FM TUNER
				P W Board, FM-AM Front End Board
R101	1	1	ZZ2915803	P W Board Assembly
R102	1	1	RT0522314	Resistor 22KΩ ±5%
R103	1	1	RT0510414	Resistor 100KΩ ±5%
R104	1	1	RT0510514	Resistor 1MΩ ±5%
R105	1	1	RT0547214	Resistor 220Ω ±5%
R106	1	1	RT0522314	Resistor 4.7KΩ ±5%
R107	1	1	RT0510214	Resistor 1KΩ ±5%
R108	1	1	RT0510214	Resistor 1KΩ ±5%
R109	1	1	RT0522314	Resistor 22KΩ ±5%
R110	1	1	RT0512214	Resistor 1.2KΩ ±5%
R111	1	1	RT0510114	Resistor 100Ω ±5%
R112	1	1	RT0510114	Resistor 100Ω ±5%
R113	1	1	RT0510114	Resistor 100Ω ±5%
R114	1	1	RT0533114	Resistor 330Ω ±5%
R115	1	1	RA0103020	Resistor 5.6KΩ ±10KΩ
R116	1	1	RT0512214	Resistor 5.6KΩ ±5%
R117	1	1	RT0556214	Resistor 10KΩ ±5%
R118	1	1	RT0510114	Resistor 10KΩ ±5%
R119	1	1	RT0510114	Resistor 1KΩ ±5%
R120	1	1	RT0510214	Resistor 1KΩ ±5%
R121	1	1	RT0530114	Resistor 300Ω ±5%
R122	1	1	RT0527314	Resistor 27KΩ ±5%
R123	1	1	RT0510414	Resistor 100KΩ ±5%
R124	1	1	RT0510114	Resistor 1.5KΩ ±5%
R125	1	1	RT0510414	Resistor 100Ω ±5%
R126	1	1	RT0510114	Resistor 100KΩ ±5%
R127	1	1	RT0530214	Resistor 3KΩ ±5%
R128	1	1	RT0510114	Resistor 2.7KΩ ±10%
R129	1	1	RT0533214	Resistor 300KΩ ±5%
R130	1	1	RT0530414	Resistor 300KΩ ±5%
C01	1	1	CA4330002	Variable Cap

U: For U.S.A.  
E: For Europe

REF. DESIG.	U	E	PART NO.	DESCRIPTION
C102	1	1	DD1205001	Ceramic Cap 5PF
C103	1	1	DK1710201	Ceramic Cap 0.001μF ±20%
C104	1	1	C104	Ceramic Cap 0.01μF ±20%
C105	1	1	DD1001001	Ceramic Cap 1PF ±0.25PF
C106	1	1	DD1615001	Ceramic Cap 15PF ±10%
C107	1	1	DK1710201	Ceramic Cap 0.001μF ±20%
C108	1	1	DK1710301	Ceramic Cap 0.01μF ±20%
C109	1	1	DD1615001	Ceramic Cap 15PF ±10%
C110	1	1	DD1207001	Ceramic Cap 7PF ±1PF
R201	1	1	RT0515114	Resistor 150Ω ±5% 1W
R202	1	1	RT0547114	Resistor 470Ω ±5% 1W
R203	1	1	RT0510114	Resistor 75Ω ±5% 1W
R204	1	1	RT053214	Resistor 1.5KΩ ±5% 1W
R205	1	1	RT0582114	Resistor 820Ω ±5% 1W
R206	1	1	RT0510214	Resistor 1KΩ ±5% 1W
R207	1	1	RT0515214	Resistor 1.5KΩ ±5% 1W
R208	1	1	RT053214	Resistor 3.3KΩ ±5% 1W
R210	1	1	RT053214	Resistor 75Ω ±5% 1W
R211	1	1	RT0575014	Resistor 100KΩ ±5% 1W
R212	1	1	RT0582114	Resistor 820Ω ±5% 1W
R213	1	1	RT0510214	Resistor 1KΩ ±5% 1W
R214	1	1	RT0556214	Resistor 5.6KΩ ±5% 1W
R215	1	1	RT0515314	Resistor 15KΩ ±5% 1W
R216	1	1	RT0575014	Resistor 1KΩ ±5% 1W
R217	1	1	RT0510214	Resistor 1KΩ ±5% 1W
R218	1	1	RT0510214	Resistor 5.6KΩ ±5% 1W
R219	1	1	RT0556214	Resistor 15KΩ ±5% 1W
R220	1	1	RT0515114	Resistor 150Ω ±5% 1W
R221	1	1	RT0515114	Resistor 1KΩ ±5% 1W
R222	1	1	RT0510214	Resistor 1KΩ ±5% 1W
R223	1	1	RT0510214	Resistor 1KΩ ±5% 1W
R224	1	1	RT0515114	Resistor 150Ω ±5% 1W
R225	1	1	RT0515114	Resistor 1KΩ ±5% 1W
R226	1	1	RT0515114	Resistor 150Ω ±5% 1W
R227	1	1	RT053214	Resistor 3.3KΩ ±5% 1W
R228	1	1	RT0515314	Resistor 15KΩ ±5% 1W
R229	1	1	RT0510214	Resistor 1KΩ ±5% 1W
R230	1	1	RT0522114	Resistor 220Ω ±5% 1W
R231	1	1	RT0582114	Resistor 820Ω ±5% 1W
R232	1	1	RT0512214	Resistor 1.2KΩ ±5% 1W
R233	1	1	RT0568214	Resistor 6.8KΩ ±5% 1W
R234	1	1	RT0568214	Resistor 6.8KΩ ±5% 1W
R235	1	1	RT0510114	Resistor 100Ω ±5% 1W
R236	1	1	RT0510214	Resistor 1KΩ ±5% 1W
R237	1	1	RT0522314	Resistor 22KΩ ±5% 1W
R238	1	1	RT0533114	Resistor 33KΩ ±5% 1W
R239	1	1	RT0551014	Resistor 51Ω ±5% 1W
R240	1	1	RT0551014	Resistor 51Ω ±5% 1W
R241	1	1	RT0551014	Resistor 51Ω ±5% 1W
R242	1	1	RT0551014	Resistor 51Ω ±5% 1W
R243	1	1	RT0510214	Resistor 1KΩ ±5% 1W
R244	1	1	RT0556214	Resistor 5.6KΩ ±5% 1W
R245	1	1	RT0556214	Resistor 5.6KΩ ±5% 1W
R246	1	1	RT0515314	Resistor 15KΩ ±5% 1W
R247	1	1	RT0522114	Resistor 1KΩ ±5% 1W
R248	1	1	RT0522314	Resistor 22KΩ ±5% 1W
R249	1	1	RT0522314	Resistor 1KΩ ±5% 1W
R250	1	1	RT0510214	Resistor 33KΩ ±5% 1W
R251	1	1	RT0533114	Resistor 1KΩ ±5% 1W
R252	1	1	RT0522314	Resistor 22KΩ ±5% 1W
R253	1	1	RA0104018	Trimming Res. 100KΩ
R254	1	1	RT0518314	Resistor 18KΩ ±5% 1W
R255	1	1	RT0510014	Resistor 10Ω ±5% 1W
R256	1	1	RT0533214	Resistor 3.3KΩ ±5% 1W
R257	1	1	RT0547314	Resistor 47KΩ ±5% 1W
R258	1	1	RT0527314	Resistor 27KΩ ±5% 1W
L201	1	1	L1018802	IFT
F201	1	1	FF1107004	Ceramic Filters 10.7 MHz
F202	1	1	FF1107004	Ceramic Filters 10.7 MHz

U: For U.S.A.  
E: For Europe

REF. DESIG.	U	E	PART NO.	DESCRIPTION
R259	1	1	RT0510114	Resistor 100Ω ±5% 1W
R260	1	1	RT0539214	

U: For U.S.A.  
E: For Europe

REF. DESIG.	U	E	PART NO.	DESCRIPTION
L202	1	1	L1015602	IIFT FM IIFT Choke Coil 150μH
L203	1	1	LC1164004	
J201	1	1	YP1000113	Plug Lug
J211	11	11		
1626	1	1	6203039W	
P300	1	1	YD2915002	P300 MPX BOARD P W Board, FM MPX Board P W Board Assembly
R301	1	1	RT0522114	Resistor 220Ω ±5% 1/4W
R302	1	1	RT056314	Resistor 56KΩ ±5% 1/4W
R303	1	1	RA052025	Trimming Res. 5KΩ
R304	1	1	RT0516314	Resistor 16KΩ ±5% 1/4W
R305	1	1	RT0510214	Resistor 1KΩ ±5% 1/4W
R306	1	1	RT052214	Resistor 220KΩ ±5% 1/4W
R307	1	1	RT0512014	Resistor 1KΩ ±5% 1/4W
R308	1	1	RT0510214	Resistor 3.9KΩ ±5% 1/4W
R310	1	1	RT0539214	Resistor 3.9 KΩ ±5% 1/4W
R311	1	1	RT0510014	Resistor 10Ω ±5% 1/4W
R312	1	1	RT0510214	Resistor 1KΩ ±5% 1/4W
R313	1	1	RT052214	Resistor 220KΩ ±5% 1/4W
R314	1	1	RT0530314	Resistor 30KΩ ±5% 1/4W
R315	1	1	RT0530314	Resistor 1.5MΩ ±5% 1/4W
R316	1	1	RT0515514	Resistor 100KΩ ±5% 1/4W
R317	1	1	RT0510414	Resistor 100KΩ ±5% 1/4W
R319	1	1	RT0510414	Resistor 22KΩ ±5% 1/4W
R320	1	1	RT0522314	
R321	1	1	RT0522314	Resistor 22KΩ ±5% 1/4W
R322	1	1	RT0568114	Resistor 680Ω ±5% 1/4W
R323	1	1	RT0568114	Resistor 680Ω ±5% 1/4W
R324	1	1	RT0510114	Resistor 100Ω ±5% 1/4W
R325	1	1	RT0510114	Resistor 100Ω ±5% 1/4W
R326	1	1	RT0582214	Resistor 8.2KΩ ±5% 1/4W
R327	1	1	RT0582214	Resistor 8.2KΩ ±5% 1/4W
R328	1	1	RT0561114	Resistor 560Ω ±5% 1/4W
R329	1	1	RT0561114	Resistor 560Ω ±5% 1/4W
R330	1	1	RT0522414	Resistor 220KΩ ±5% 1/4W
R331	1	1	RT0522414	Resistor 220KΩ ±5% 1/4W
R332	1	1	RT0515214	Resistor 1.5KΩ ±5% 1/4W
R333	1	1	RT0522414	Resistor 220KΩ ±5% 1/4W
R334	1	1	RT0522414	Resistor 220KΩ ±5% 1/4W
R336	1	1	RT0527214	Resistor 2.7KΩ ±5% 1/4W
C319	1	1	DF1522205	Film Cap 2200PF ±5%
C320	1	1	DF1522205	Film Cap 10μF ±5%
C321	1	1	EA106169	Film Cap 0.047μF ±20%
C322	1	1	DF1747301	Film Cap 470PF ±5%
C323	1	1	DF5547101	Film Cap 2200PF ±10%
C324	1	1	DF1622205	Film Cap 0.47μF ±20%
C325	1	1	EO4740501	Film Cap 0.47μF ±20%
C326	1	1	EO2240501	Film Cap 0.22μF ±20%
C327	1	1	EO2240501	Film Cap 0.22μF ±20%
C328	1	1	EA2220169	Film Cap 16V ±20%
C329	1	1	DF1615205	Film Cap 1500PF ±10%
C330	1	1	DF1615205	Film Cap 1500PF ±10%
C331	1	1	DD1536101	Ceramic Cap 360PF ±5%
C332	1	1	DD1536101	Ceramic Cap 360PF ±5%

REF. DESIG.	U	E	PART NO.	DESCRIPTION
C313	1	1	DF1633205	Film Cap 3300PF ±10%
C314	1	1	DF1633205	Film Cap 3300PF ±10%
C315	1	1	DF1515205	Film Cap 1500PF ±5%
C316	1	1	DF1515205	Film Cap 1500PF ±5%
C317	1	1	DF1622205	Film Cap 2200PF ±10%
C318	1	1	DF1622205	Film Cap 2200PF ±10%
C319	1	1	DF1533205	Film Cap 3300PF ±5%
C320	1	1	EV2240351	Electrolytic Cap 0.22μF ±20%
C321	1	1	EV1050352	Electrolytic Cap 1μF ±20%
C322	1	1	EV1050352	Electrolytic Cap 1μF ±20%
C323	1	1	EV1050352	Electrolytic Cap 1μF ±20%
C324	1	1	EV1050352	Electrolytic Cap 1μF ±20%
C325	1	1	EA3370359	Electrolytic Cap 330μF 35V
C326	1	1	HC1000401	IC HA1156
C327	1	1	HT3037210	Transistor 2SC 372
C328	1	1	HT313272A	Transistor 2SC 1327 S or T
C329	1	1	HT104942A	Transistor 2SA 494 G or Y
C330	1	1	HT104942A	Transistor 2SA 494 G or Y
C331	1	1	LS1001304	MPX Coil 56mH
C332	1	1	LS1001305	MPX Coil 56mH
C333	1	1	LS1001305	MPX Coil 43mH
C334	1	1	YD2915003	P400 EOL AMP. BOARD P W Board,EOL AMP Board
C335	1	1	RT0522314	
C336	1	1	RT0522314	
R301	~	11	YP1000113	Plug
R302	1	1	RT0522314	
R303	1	1	RT0522314	
R304	1	1	RT0522314	
R305	1	1	RT0522314	
R306	1	1	RT0522314	
R307	1	1	RT0522314	
R308	1	1	RT0522314	
R309	1	1	RT0522314	
R310	1	1	RT0522314	
R311	1	1	RT0522314	
R312	1	1	RT0522314	
R313	1	1	RT0522314	
R314	1	1	RT0522314	
R315	1	1	RT0522314	
R316	1	1	RT0522314	
R317	1	1	RT0522314	
R318	1	1	RT0522314	
R319	1	1	RT0522314	
R320	1	1	RT0522314	
R321	1	1	RT0522314	
R322	1	1	RT0522314	
R323	1	1	RT0522314	
R324	1	1	RT0522314	
R325	1	1	RT0522314	
R326	1	1	RT0522314	
R327	1	1	RT0522314	
R328	1	1	RT0522314	
R329	1	1	RT0522314	
R330	1	1	RT0522314	
R331	1	1	RT0522314	
R332	1	1	RT0522314	
R333	1	1	RT0522314	
R334	1	1	RT0522314	
R335	1	1	RT0522314	
R336	1	1	RT0522314	
R337	1	1	RT0522314	
R338	1	1	RT0522314	
R339	1	1	RT0522314	
R340	1	1	RT0522314	
R341	1	1	RT0522314	
R342	1	1	RT0522314	
R343	1	1	RT0522314	
R344	1	1	RT0522314	
R345	1	1	RT0522314	
R346	1	1	RT0522314	
R347	1	1	RT0522314	
R348	1	1	RT0522314	
R349	1	1	RT0522314	
R350	1	1	RT0522314	
R351	1	1	RT0522314	
R352	1	1	RT0522314	
R353	1	1	RT0522314	
R354	1	1	RT0522314	
R355	1	1	RT0522314	
R356	1	1	RT0522314	
R357	1	1	RT0522314	
R358	1	1	RT0522314	
R359	1	1	RT0522314	
R360	1	1	RT0522314	
R361	1	1	RT0522314	
R362	1	1	RT0522314	
R363	1	1	RT0522314	
R364	1	1	RT0522314	
R365	1	1	RT0522314	
R366	1	1	RT0522314	
R367	1	1	RT0522314	
R368	1	1	RT0522314	
R369	1	1	RT0522314	
R370	1	1	RT0522314	
R371	1	1	RT	

U: For U.S.A.

E: For Europe

REF. DESIG.	U	E	PART NO.	DESCRIPTION			REF. DESIG.	U	E	PART NO.	DESCRIPTION		
C703	1	1	DD1620101	Ceramic Cap	200PF	50V	H004	1	1	HT401881M	Transistor	2SD188M.L	
C704	1	1	DD1620101	Ceramic Cap	200PF	50V	J009	1	1	YJ0500019	Socket	TR	
C705	1	1	EE4760162	Electroly Cap	47μF	16V±20%	J010	1	1	YJ0500019	Socket	TR	
C706	1	1	EE4760162	Electroly Cap	47μF	16V±20%	J011	1	1	YJ0500019	Socket	TR	
C707	1	1	DD1003050	Ceramic Cap	3PF	500V	J012	1	1	YJ0500019	Socket	TR	
C708	1	1	DD1003050	Ceramic Cap	3PF	500V							
C709	1	1	EA4760509	Electroly Cap	47μF	500V <sup>+10%</sup> <sub>-10%</sub>							
C710	1	1	EA4760509	Electroly Cap	47μF	500V <sup>+10%</sup> <sub>-10%</sub>							
C715	1	1	DK1610150	Ceramic Cap	100PF								
C716	1	1	DK1610150	Ceramic Cap	100PF								
C717	1	1	DF1710452	Film Cap	0.1μF	200V	P800	1	1	YD2915007	P800 POWER BOARD		
C718	1	1	DF1710452	Film Cap	0.1μF	200V		1	1	ZZ2915007	P.W. Board, Power Supply Board		
C719	1	1	EA2270509	Electroly Cap	220μF	50V <sup>+10%</sup> <sub>-10%</sub>							
C720	1	1	EA1060359	Electroly Cap	10μF	35V <sup>+10%</sup> <sub>-10%</sub>	R801	1	1	GJ0522002	Resistor	22Ω	±5% 2W
C721	1	1	EA4760169	Electroly Cap	47μF	16V <sup>+10%</sup> <sub>-10%</sub>	R802	1	1	GF0510014	Resistor	10Ω	±5% 1/4W
C722	1	1	EA2270109	Electroly Cap	220μF	10V <sup>+10%</sup> <sub>-10%</sub>	R803	1	1	RT0515214	Resistor	1.5KΩ	±5% 1/4W
J701							R804	1	1	RT0515214	Resistor	1.5KΩ	±5% 1/4W
~ J727	27	27	YP1000113	Plug			R805	1	1	GJ0533102	Resistor	330Ω	±5% 2W
H701	1	1	HT107631B	Transistor	2SA763		R806	1	1	RT0536314	Resistor	36KΩ	±5% 1/4W
H702	1	1	HT107631B	Transistor	2SA763		R807	1	1	RT0527314	Resistor	27KΩ	±5% 1/4W
H703	1	1	HT107631B	Transistor	2SA763		R808	1	1	RA0502013	Trimming Res	5KΩ	B
H704	1	1	HT107631B	Transistor	2SA763		C801	1	1	DK1810351	Ceramic Cap	0.01μF	+100% 500V
H705	1	1	HV0000312	Diode	MV-13	C802	1	1	DK1810351	Ceramic Cap	0.01μF	+100% 500V	
H706	1	1	HV0000312	Diode	MV-13	C803	1	1	EA4770631	Electroly Cap	470μF	63V	
H707	1	1	HT315092B	Transistor	2SC 1509 Q.R		C804	1	1	EA4770509	Electroly Cap	470μF	50V
H708	1	1	HT315092B	Transistor	2SC 1509 Q.R		C805	1	1	EA1070509	Electroly Cap	100μF	50V
H709	1	1	HT309451Q	Transistor	2SC 945 Q		C806	1	1	DF1747305	Film Cap	0.047μF	±20% 50V
H710	1	1	HT309451Q	Transistor	2SC 945 Q		C807	1	1	DK1840302	Ceramic Cap	0.04μF	+100% 50V
H711	1	1	HT107331Q	Transistor	2SA 733 Q		C808	1	1	EA3350509	Electroly Cap	3.3μF	50V
H712	1	1	HT107331Q	Transistor	2SA 733 Q		C809	1	1	EA4770169	Electroly Cap	470μF	16V
H713	1	1	HD2000221	Diode	1S2472 (GY)		C810	1	1	EA1080109	Electroly Cap	1000μF	10V
H714	1	1	HD2000221	Diode	1S2472 (GY)		H801	1	1	HD2001508	Diode	SS-3R	
H715	1	1	HD2000221	Diode	1S2472 (GY)		H802	1	1	HD2001408	Diode	SS-3	
H716	1	1	HD2000221	Diode	1S2472 (GY)		H803	1	1	HD2001203	Diode	DS-131B	
H717	1	1	HD2000221	Diode	1S2472 (GY)		H804	1	1	HD2001103	Diode	DS-132B	
H718	1	1	HD2000221	Diode	1S2472 (GY)		H805	1	1	HT403302A	Transistor	2SD330 D or E	
H719	1	1	HD2000221	Diode	1S2472 (GY)		H806	1	1	HT309452A	Transistor	2SC945 Q or R	
H720	1	1	HD2000221	Diode	1S2472 (GY)		H807	1	1	HD3002109	Diode	BZ-140 14V	
							H808	1	1	HD2000413	Diode	S1B01-02	
J801							J801						
~ J815		15	15	YP1000113	Plug		J815						
H721	1	1	HT315091P	Transistor	2SC1509 (P.Q)		J816	1	1	YJ0800021	Socket		
H722	1	1	HT315091P	Transistor	2SC1509 (P.Q)		J817	1	1	YJ0800021	Socket		
H723	1	1	HT107771P	Transistor	2SA 777 (P.Q)		J818	1	1	YJ0800021	Socket		
H724	1	1	HT107771P	Transistor	2SA 777 (P.Q)		J819	1	1	YJ0800021	Socket		
H725	1	1	HD3003009	Diode	WZ-177		0403	1		291516021	Bracket		
H726	1	1	HT309452A	Transistor	2SC945 Q.R		0404	1		291516022	Bracket		
H727	1	1	HT309452A	Transistor	2SC945 Q.R		0406	1	1	291516024	Bracket		
H728	1	1	HT313182C	Transistor	2SC1318 R.S		0409	2	1	145525901	Bush		
H729	1	1	HD2000321	Diode	1S2471		0411	4	4	51100306S	B H M Screw	B 3 x 6	
L701	1	1	LC2272001	Coil	2.7μH		0412	4	4	53110303E	Hexagon Nut	B 3 x 6	
L702	1	1	LC2272001	Coil	2.7μH		0414	2	2	51100306S	B H M Screw	B 3 x 6	
L703	1	1	LY2024005	Relay			0415	2	2	53110303E	Hexagon Nut	B 3 x 6	
1706	1	1	291526701	Heat Sink			0416	6	6	51100306S	B H M Screw	B 3 x 6	
1707	2	2	291516007	Bracket			0417	6	6	53110303E	Hexagon Nut		
1708	4	4	51380306P	R H Tap Screw			0419	1	1	54050400R	T L Washer OR	Chassis Ground	
1711	8	8	51100312E	B H M Screw	B 3 x 12		0421	4	4	51100308S	B H M Screw	AC Outlet B 3 x 8	
1713	8	8	54040302N	Spring Washer	Power Tr.		0422	4	4	53110303E	Hexagon Nut	AC Outlet	
1716	2	2	282016007	Bracket			0424	1		284906702	Cap		
1717	8	8	51380306P	R H Tap Screw			0426	1		282125901	Bush		
H001	1	1	HT401881M	Transistor	2SD188M.L		0427	2		53110303A	Hexagon Nut		
H002	1	1	HT106271M	Transistor	2SA627M.L		0428	2		54050300R	T L Washer		
H003	1	1	HT106271M	Transistor	2SA627M.L		0429	2		51060316A	P H M Screw	P 3 x 16	

U: For U.S.A.  
E: For Europe

REF. DESIG.	U	E	PART NO.	DESCRIPTION
0430	3	2	55060305S	T R Rivet
0432	3	3	51100306S	B H M Screw
R003	1		RC1022512	Resistor 2.2MΩ ±10% ½W
1517	1	1	62030039W	Lug
J001	1	1	YT0304009	Terminal
J004	1	1	YT0101003	Terminal
J013	1	1	YT0304006	Terminal
J014	1	1	YT0304006	Terminal
J016	1		YJ0800012	Socket
F001	1		FS1020006	Fuse
F002	1		FS2025091	Fuse
W001	1		YC0240010	AC Cord
0423	4	4	54050300R	T. L Washer
J017	1	1	YJ0400048	Jack
J018	1	1	YJ0400048	Jack
J019	1	1	YT0201009	Terminal
0505	1	1	281927103	Holder
0506	1	1	257816052	Bracket K
0511	2	2	51100310S	B H M Screw x 2
0512	2	2	54050300R	T L Washer OR x 2
0513	2	2	53110303E	Hexagon Nut x 2
0516	2	2	51100310S	B H M Screw x 2
0518	2	2	53110303E	Hexagon Nut x 2
L001	1	1	LF1120036	Ant Coil
L002	1	1	LC1332002	Choke Coil
C001	1	1	DK1710301	Ceramic Cap 0.01μF ±20% 50V
0420	1	1	62041760W	Lug Chassis Ground
J005	1	1	YT0204008	Terminal 4P Pin-Jack
C002	1	1	DK1710301	Ceramic Cap 0.01μF ±20% 50V
1621	1	1	62030039W	Lug
J006	1	1	YT0208006	Terminal 8P Pin-Jack
0603	1	1	291516050	Bracket K
0610	2	2	51100306A	B H M Screw x 2
0613	2	2	51100306A	B H M Screw x 2
0616	1	1	281816003	Bracket
0617	1	1	281816004	Bracket
0618	4	4	51100406A	B H M Screw x 4
0621	4	4	51100306A	B H M Screw x 4
0622	2	2	51100306A	B H M Screw x 2
0828	2	2	51100305A	B H M Screw x 2
0624	1	1	257710602	Bearing
0625	1	1	141511801	Spacer
0626	2	2	51040306A	F H M Screw x 2
0627	2	2	51470306A	B H M Screw x 2
0628	1	1	287105302	Cover
0623	1	1	291512002	Insulator
0631	1	1	281912005	Insulator
0632	1	1	285326901	Protector
0633	2	2	51570305B	P H Tapt Screw x 2
0702	2	2	51570306B	P H Tapt Screw
0703	2	2	54050300R	T L Washer OR

REF. DESIG.	U	E	PART NO.	DESCRIPTION
0706	2	2	51042608A	F H M Screw F 2.6 x 8
0711	2	2	51570305B	P H Tapt Screw P 3 x 5 ST
0729	1	1	287105102	Guide
0733	4	4	288612002	Insulator
0609	1	1	291516006	Bracket
J015	1	1	YJ0100098	Jack Headphone
0611	1	1	291516005	Bracket Power SW
G001	1		BF1040003	Printed Comp
C005		1	DF1722380	Film Cap 0.0022μF 1000V
0612	2	2	51060306A	P H M Screw Power Sw. P 3 x 6
S002	1	1	SP0201015	Power Switch
M001	1	1	IM1104208	Meter AM/FM
0629	1	1	288610701	Sheet
0709	1	1	291516004	Bracket
0710	1	1	291225901	Bush
M003	1	1	IN1008009	Lamp Stereo Ind.
0802	1	1	285427401	Reflector
0803	1	1	285427101	Holder
0805	1	1	51480306A	B H M Screw F
0806	1	1	51570305B	P H Tapt Screw P 3 x 5 ST
M004	1	1	IN1008036	Lamp Meter
J008	1	1	YJ0800019	Socket Lamp Socket
0826	1	1	291510903	Shield
0827	1	1	291512003	Insulator
1002	1	1	287127101	Holder
1003	2	2	51570305B	P H Tapt Screw P 3 x 5 ST
1006	1	1	287100501	Clamper
1007	2	2	51100306A	B H M Screw B 3 x 6
0902	1	1	287127401	Reflector
0903	2	2	51480306A	B H M Screw F
PZ01	1	1	YD2886016	<b>PZ01 DIAL LAMP BOARD</b>
	1	1	ZZ2915116	P.W. Board, Dial Lamp Board
				P.W. Board Assembly
MZ01	1	1	IN1008036	Lamp
MZ02	1	1	IN1008036	Lamp
MZ03	1	1	IN1008036	Lamp
MZ04	1	1	IN1008036	Lamp
MZ05	1	1	IN1008036	Lamp
JZ01	1	1	YJ0800017	Socket
JZ02	1	1	YJ0800017	Socket
JZ03	1	1	YJ0800017	Socket
JZ04	1	1	YJ0800017	Socket
JZ05	1	1	YJ0800017	Socket
JZ06	1	1	YJ0800017	Socket
JZ07	1	1	YJ0800017	Socket
JZ08	1	1	YJ0800017	Socket
JZ09	1	1	YJ0800017	Socket
JZ10	1	1	YJ0800017	Socket
JZ11	~	4	YP1000113	Plug
JZ14				

U: For U.S.A.

E: For Europe

REF. DESIG.	U	E	PART NO.	DESCRIPTION	
1103	1	1	285310650	Bearing K	
1108	1	1	51640410D	Set Screw C P	
1109	1	1	54040402N	Spring Washer	
1110	1	1	53110403E	Hexagon Nut	
PE01	1	1	YD2915004	<b>PE01 TONE AMP BOARD</b>	
	1	1	ZZ2915004	P.W. Board, Pre-Tone Amp. Board	
				P.W. Board Assembly	
RE01	1	1	RT0547414	Resistor	470KΩ ±5% 1/4W
RE02	1	1	RT0547414	Resistor	470KΩ ±5% 1/4W
RE03	1	1	RT0539114	Resistor	390Ω ±5% 1/4W
RE04	1	1	RT0539114	Resistor	390Ω ±5% 1/4W
RE05	1	1	RN0510514	Resistor	1MΩ ±5% 1/4W
RE06	1	1	RN0510514	Resistor	1MΩ ±5% 1/4W
RE07	1	1	RN0510414	Resistor	100KΩ ±5% 1/4W
RE08	1	1	RT0510314	Resistor	10KΩ ±5% 1/4W
RE09	1	1	RT0527314	Resistor	27KΩ ±5% 1/4W
RE10	1	1	RT0527314	Resistor	27KΩ ±5% 1/4W
RE11	1	1	RT0510214	Resistor	1KΩ ±5% 1/4W
RE12	1	1	RT0510214	Resistor	1KΩ ±5% 1/4W
RE13	1	1	RT0551214	Resistor	5.1KΩ ±5% 1/4W
RE14	1	1	RT0551214	Resistor	5.1KΩ ±5% 1/4W
RE15	1	1	RT0510214	Resistor	1KΩ ±5% 1/4W
RE16	1	1	RT0510214	Resistor	1KΩ ±5% 1/4W
RE17	1	1	RT0547414	Resistor	470KΩ ±5% 1/4W
RE18	1	1	RT0547414	Resistor	470KΩ ±5% 1/4W
RE19	1	1	RT0556214	Resistor	5.6KΩ ±5% 1/4W
RE20	1	1	RT0556214	Resistor	5.6KΩ ±5% 1/4W
RE21	1	1	RT0512314	Resistor	12KΩ ±5% 1/4W
RE22	1	1	RT0512314	Resistor	12KΩ ±5% 1/4W
RE23	1	1	RT0515414	Resistor	150KΩ ±5% 1/4W
RE24	1	1	RT0515414	Resistor	150KΩ ±5% 1/4W
RE25	1	1	RT0556214	Resistor	5.6KΩ ±5% 1/4W
RE26	1	1	RT0556214	Resistor	5.6KΩ ±5% 1/4W
RE27	1	1	RT0556214	Resistor	5.6KΩ ±5% 1/4W
RE28	1	1	RT0556214	Resistor	5.6KΩ ±5% 1/4W
RE29	1	1	RT0527314	Resistor	27KΩ ±5% 1/4W
RE30	1	1	RT0527314	Resistor	27KΩ ±5% 1/4W
RE31	1	1	RT0512314	Resistor	12KΩ ±5% 1/4W
RE32	1	1	RT0512314	Resistor	12KΩ ±5% 1/4W
RE33	1	1	RT0515314	Resistor	15KΩ ±5% 1/4W
RE34	1	1	RT0515314	Resistor	15KΩ ±5% 1/4W
RE35	1	1	RT0547414	Resistor	470KΩ ±5% 1/4W
RE36	1	1	RT0547414	Resistor	470KΩ ±5% 1/4W
RE37	1	1	RT0527314	Resistor	27KΩ ±5% 1/4W
RE38	1	1	RT0527314	Resistor	27KΩ ±5% 1/4W
RE39	1	1	RT0522514	Resistor	2.2MΩ ±5% 1/4W
RE40	1	1	RT0522514	Resistor	2.2MΩ ±5% 1/4W
RE41	1	1	RT0568314	Resistor	68KΩ ±5% 1/4W
RE42	1	1	RT0568314	Resistor	68KΩ ±5% 1/4W
RE43	1	1	RT0547314	Resistor	47KΩ ±5% 1/4W
RE44	1	1	RT0547314	Resistor	47KΩ ±5% 1/4W
RE45	1	1	RT0510314	Resistor	10KΩ ±5% 1/4W
RE46	1	1	RT0510314	Resistor	10KΩ ±5% 1/4W
RE47	1	1	RT0522114	Resistor	220Ω ±5% 1/4W
RE48	1	1	RT0522114	Resistor	220Ω ±5% 1/4W
RE49	1	1	RT0547414	Resistor	470KΩ ±5% 1/4W
RE50	1	1	RT0547414	Resistor	470KΩ ±5% 1/4W
RE51	1	1	RM0104005	Variable Resist	100KΩ (B) High
RE52	1	1	RM0104005	Variable Resist	100KΩ Mid
RE53	1	1	RM0104005	Variable Resist	100KΩ Low
RE54	1	1	RT0582114	Resistor	820Ω ±5% 1/4W
CE01	1	1	DF1722405	Film Cap	0.22μF 50V±20%

REF. DESIG.	U	E	PART NO.	DESCRIPTION	
CE02	1	1	DF1722405	Film Cap	0.22μF 50V±20%
CE03	1	1	EA1060359	Electroly Cap	10μF 35V ±10%
CE04	1	1	EA1060359	Electroly Cap	10μF 35V ±10%
CE05	1	1	EE4750251	Electroly Cap	4.7μF 25V±20%
CE06	1	1	EE4750251	Electroly Cap	4.7μF 25V±20%
CE07	1	1	DD1610101	Ceramic Cap	100PF 50V±10%
CE08	1	1	DD1610101	Ceramic Cap	100PF 50V±10%
CE09	1	1	DF1622205	Film Cap	2200PF 50V±10%
CE10	1	1	DF1622205	Film Cap	2200PF 50V±10%
CE11	1	1	DF1668205	Film Cap	6800PF 50V±10%
CE12	1	1	DF1668205	Film Cap	6800PF 50V±10%
CE13	1	1	DF1622305	Film Cap	0.022μF 50V±10%
CE14	1	1	DF1622305	Film Cap	0.022μF 50V±10%
CE15	1	1	DF1622305	Film Cap	0.022μF 50V±10%
CE16	1	1	DF1622305	Film Cap	0.022μF 50V±10%
CE17	1	1	DF1610305	Film Cap	0.01μF 50V±10%
CE18	1	1	DF1610305	Film Cap	0.01μF 50V±10%
CE19	1	1	EE1050501	Electroly Cap	1μF 50V±20%
CE20	1	1	EE1050501	Electroly Cap	1μF 50V±20%
CE21	1	1	EE3350501	Electroly Cap	33μF 50V±20%
CE22	1	1	EE3350501	Electroly Cap	33μF 50V±20%
CE23	1	1	EQ1050501	Electroly Cap	1μF 50V±30%
CE24	1	1	EQ1050501	Electroly Cap	1μF 50V±30%
CE25	1	1	EA2270359	Electroly Cap	220μF 35V ±10%
HE01	1	1	HT313283A	Transistor	2SC1328 S.T.U.
HE02	1	1	HT313283A	Transistor	2SC1328 S.T.U.
HE03	1	1	HT107632A	Transistor	2SA763 4.5
HE04	1	1	HT107632A	Transistor	2SA763 4.5
HE05	1	1	HT313283A	Transistor	2SC1328 S.T.U.
HE06	1	1	HT313283A	Transistor	2SC1328 S.T.U.
HE07	1	1	HT107632A	Transistor	2SA763 4.5
HE08	1	1	HT107632A	Transistor	2SA763 4.5
JE01	~	8	YP1000113	Plug	
JE08					
PH01	1	1	YD2915005	<b>PH02 FILTER BOARD</b>	
	1	1	ZZ2915005	P.W. Board, Filter Board	
				P.W. Assembly	
RH01	1	1	RT0510214	Resistor	1KΩ ±5% 1/4W
RH02	1	1	RT0510214	Resistor	1KΩ ±5% 1/4W
RH04	1	1	RT0510514	Resistor	1MΩ ±5% 1/4W
RH05	1	1	RT0510514	Resistor	1MΩ ±5% 1/4W
RH06	1	1	RT0547214	Resistor	4.7KΩ ±5% 1/4W
RH07	1	1	RT0547214	Resistor	4.7KΩ ±5% 1/4W
RH08	1	1	RT0522514	Resistor	2.2MΩ ±5% 1/4W
RH09	1	1	RT0522514	Resistor	2.2MΩ ±5% 1/4W
CH01	1	1	DF1633305	Film Cap	0.033μF 50V±10%
CH02	1	1	DF1633305	Film Cap	0.033μF 50V±10%
CH03	1	1	DF1668205	Film Cap	0.0068μF 50V±10%
CH04	1	1	DF1668205	Film Cap	0.0068μF 50V±10%
SH01	1	1	SP0404013	Push Switch	
JH01	~	17	YP1000113	Plug	
JH17					
PT01	1	1	YD2915006	<b>PT01 MAIN REMOTE BOARD</b>	
	1	1	ZZ2915006	P.W. Board, Selector-SW Board	
				P.W. Board Assembly	
RT01	1	1	RT0568314	Resistor	68KΩ ±5% 1/4W

U: For U.S.A.  
E: For Europe

REF. DESIG.	U	E	PART NO.	DESCRIPTION
RT02	1	1	RT0568314	Resistor 68KΩ ±5% ½W
RT03	1	1	RT0515314	Resistor 15KΩ ±5% ½W
RT04	1	1	RT0515314	Resistor 15KΩ ±5% ½W
RT05	1	1	GJ0533102	Resistor 330Ω ±5% 2W
RT06	1	1	GJ0533102	Resistor 330Ω ±5% 2W
RT07	1	1	GU0515112	Resistor 150Ω ±5% ½W
RT08	1	1	GU0515112	Resistor 150Ω ±5% ½W
CT01	1	1	DD1612101	Ceramic Cap 120PF 50V±10%
CT02	1	1	DD1612101	Ceramic Cap 120PF 50V±10%
CT03	1	1	DF1627305	Film Cap 0.027μF 50V±10%
CT04	1	1	DF1627305	Film Cap 0.027μF 50V±10%
ST01	1	1	SP0404011	Push Switch
JT01 ~ JT16	16	16	YP1000113	Plug
R002	1	1	RM0254022	Variable Resist Volume
S001	1	1	SR0905008	Rotary SW Selector
R004	1	1	GF0533012	Resistor
R001	1	1	RS0504002	Resistor Balance (33Ω ±5% ½W)
1416	1	1	291530201	Dial
1418	1	1	291530203	Dial
1420	1	1	285310701	Sheet
1733	1	1	138200503	Clamper
1734	1	1	51100305A	B H M Screw
1731	1	1	257710402	Retainer
1632	1	1	291516011	Bracket
1633	1	1	51062606E	P H M Screw
J025	1	1	YJ0800009	Socket
J024	1	1	YL0106004	Terminal
1534	1	1	290812002	Insulator
1522	1	1	121000501	Clamper
1624	1	1	121000501	Clamper
J003	1	1	YL0102003	Terminal
L004	1	1	LB3007526	Balun Coil
0234	4	4	275905701	Leg
0235	4	4	51490410S	B H M Screw FS
0321	1	1	288686101	Label Marantz
0323	1	1	951022101	Label Fuse Caution
0327	1	1	951061102	Label 2A 250V
0407	6	6	51100306S	B H M Screw
1502	1	1	291510550	Chassis K
1507	2	2	291516008	Bracket
1508	4	4	54020401A	Flat Washer P
1509	4	4	54040402A	Spring Washer
1510	4	4	53110403A	Hexagon Nut
1511	2	2	287100501	Clamper
1513	4	4	51570306S	P H Tapt Screw
1515	4	4	51100306S	B H M Screw
1516	16	16	51570306S	P H Tapt Screw
1518	1	1	51570306B	P H Tapt Screw
1519	1	1	138200503	Clamper
1520	4	4	54050300R	T L Washer OR
1521	10	10	51570305B	P H Tapt Screw
1523	2	2	288600503	Clamper

REF. DESIG.	U	E	PART NO.	DESCRIPTION
1524	4	4	288600502	Clamper
1525	2	2	288600505	Clamper
1526	2	2	288600506	Clamper
1527	2	2	285116006	Bracket
1528	4	4	51570306B	P H Tapt Screw
1529	1	1	291516009	Bracket
1530	1	1	51570306B	P H Tapt Screw
1531	1	1	54050300R	T L Washer OR
1532	2	2	51570306B	P H Tapt Screw
1535	2	2	51570312B	P H Tapt Screw
1619	1	1	51570306B	P H Tapt Screw
1620	1	1	54050300R	T L Washer OR
1623	1	1	51570306B	P H Tapt Screw
1718	4	4	51570306B	P H Tapt Screw x 4
1732	1	1	51570306B	P H Tapt Screw
1627	1	1	51570306B	P H Tapt Screw
1630	1	1	51570306B	P H Tapt Screw
J007	1	1	YL0105002	Terminal
C003	1	1	EC6880352	Electroly Cap
C004	1	1	EC6880352	Electroly Cap
L005	1	1	TS1850403	Power Transf
L005	1	1	TS1850404	Power Transf
0714	1	1	291526250	Pulley K
0719	2	2	51100306A	B H M Screw
0721	1	1	291526251	Pulley K
0728	2	2	51100306A	B H M Screw
F801	1	1	FS1010008	Fuse
E802	1	1	FS1020006	Fuse
F801	1	1	FS1010090	Fuse
F802	1	1	FS1020090	Fuse
F003	1	1	FS1020090	Fuse
0219	4	4	257711807	Spacer
0220	1	1	281825701	Lid
0221	1	1	281825702	Lid
0222	1	1	291512001	Insulator
0223	4	4	51480406S	B H M Screw F
0224	10	10	51100406S	B H M Screw
1512	1	1	209512004	Insulator
0303	1	1	257886101	Label
0304	1	1	257886102	Label
0305	1	1	257886103	Label
0306	1	1	250626506	Indicator
0313	1	1	951091102	Label
0113	4	4	52017039J	H Head Bolt
0120	1	1	289610701	Sheet
0125	1	1	289205502	Collar
0202	8	8	288615403	Knob
0204	1	1	290415404	Knob
0205	1	1	285015401	Knob
0206	5	5	281815403	Knob
0208	1	1	291526501	Indicator
0210	1	1	291526503	Indicator
0217	2	2	51100306S	B H M Screw
0316	1	1	951110102	Label
0634	1	1	285011202	Shaft
0635	1	1	54040402N	Spring Washer
1410	1	1	56382540G	Eyelet
1422	1	1	291526901	Protector
1423	2	2	51570305B	P H Tapt Screw
1922	4	4	952281501	Serial No Card
1924	4	4	952301511	Serial No Card

**U: For U.S.A.**

## E: For Europe

REF. DESIG.	U	E	PART NO.	DESCRIPTION	
1802	1		291585101	Instructions	Set
1809	1		291585601	Schematic	
1810		1	291585602	Schematic	
1814	1	1	281885108	Instructions	Accessories
1817	1	1	281885104	Instructions	Packing
1819	1	1	281885110	Instructions	4 ch.
1824	1	1	257785401	Guarantee Card	
1825	1	1	257785102	Instructions	Red Tag
1826	1		257781301	Envelope	
1931	1	1	ZA0200007	Ext Antenna	FM
1831		1	281881301	Envelope	
1902	1	1	291580101	Packing Case	Inner
1903	1	1	291580111	Packing Case	Outer
1908	1	1	281880304	Partitioner	Upper
1909	1	1	281880305	Partitioner	Lower
1912	1	1	901483838	Polyethylen Bag	Set
1914	1	1	901302501	Polyethylen Bag	Printed Material
1915	1	1	901302501	Polyethylen Bag	Accessories
1917	1	1	102980401	Sleeve	Power Cord
1918		1	956000004	Hang Tag	Voltage Ind.
1919	2	2	273182101	Silicagel	
1920	1	1	281905601	Buffer	

REF. DESIG.	U	E	PART NO.	DESCRIPTION

**TECHNICAL SPECIFICATIONS****AUDIO CIRCUITS:**

Rated Power Output (Continuous Average per Channel, All Channels Driven).

Power Output .....	20 Watts 4 Ohms
	20 Watts 8 Ohms
	10 Watts 16 Ohms
Power Band .....	20 Hz to 20 KHz
THD .....	0.5%
High-level hum and noise (ref. 20 Watts at 8 ohms) .....	-77 dB
Phono hum and noise .....	1.5 $\mu$ V equivalent input
Dynamic range (phono input to tape recording output) .....	96 dB
I.M. Distortion (SMPTE), at rated power .....	0.9%
Distortion decreases as output is lowered	
Total Harmonic Distortion, at rated power .....	0.5% Maximum
Distortion decreases as output is lowered	
Power Bandwidth (IHF) for 0.5% THD .....	10 Hz to 50,000 Hz
Damping Factor (ref. 8 ohms) .....	Greater than 20
Frequency Response	
Through phono .....	2.0 dB
Input Sensitivity (for 15 Watts at 8 ohms)	
High-level .....	180 mV
Phono (1,000 Hz) .....	1.8 mV
Input Impedance	
High-level .....	100,000 ohms
Phono .....	47,000 ohms
Channel Separation 20 Hz to 10,000 Hz .....	30 dB Minimum

**FM SECTIONS:**

IHF Usable Sensitivity .....	2.5 $\mu$ V
Selectivity .....	50 dB
Noise Quieting .....	-70 dB at 1.000 $\mu$ V
Total Harmonic Distortion, 400 Hz, 100% Mod .....	0.3% Maximum
Frequency Response (ref. 75 $\mu$ sec. de-emphasis) .....	$\pm$ 1 dB 50 Hz to 15 KHz
Stereo Separation .....	1,000 Hz 40 dB
Sub Carrier (38 KHz) Suppression .....	60 dB

**GENERAL:**

Power Requirements .....	220V ~ 50/60 Hz
At rated output, both channels operating .....	140 Watts
Idling Power (Volume Control at zero) .....	30 Watts
Dimensions	
Panel Width .....	17-3/8 Inches
Panel Height .....	5-3/8 Inches
Depth .....	14 Inches
Weight	
Unit alone .....	26.4 lbs
Packed for shipment .....	33 lbs

\*These specifications and exterior designs may be changed for improvement without advance notice.

## **SERVICE INFORMATION FOR EUROPEAN MODEL**

The information contained here in includes the rear panel and main chassis component locations, schematic diagram, voltage conversion and FTZ regulation.

For the circuit description, alignment method and repairing hints, refer to the original service manual.

**marantz**

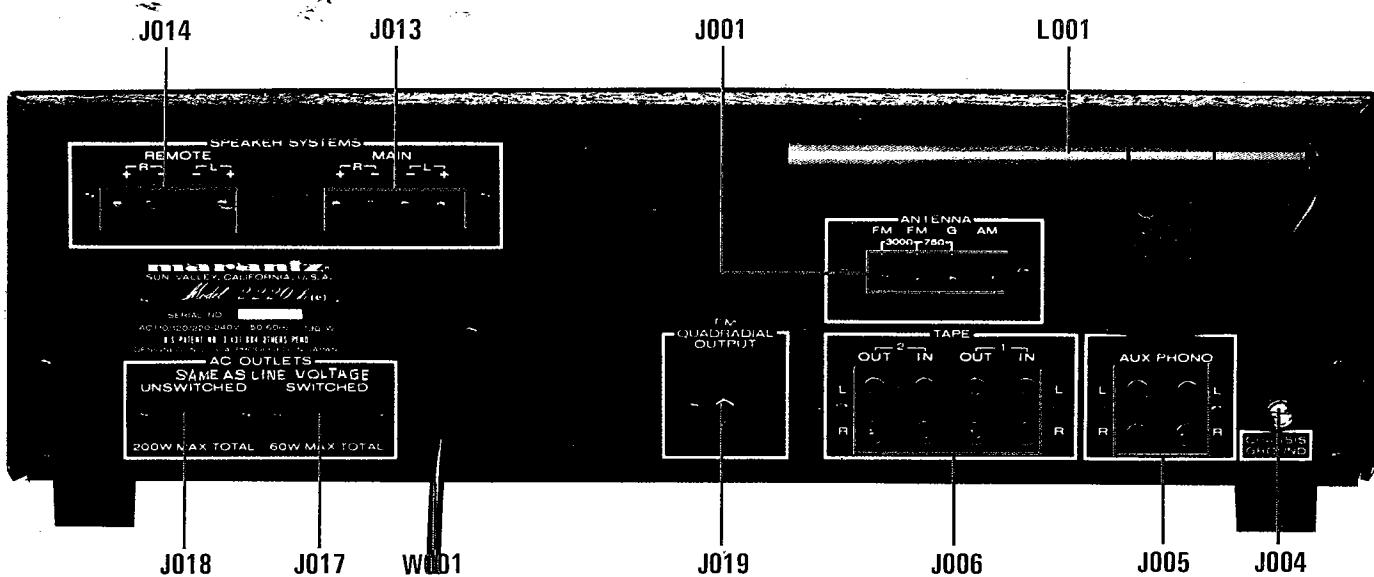


Figure 18. Rear Panel Adjustments and Facilities Locations for European Model

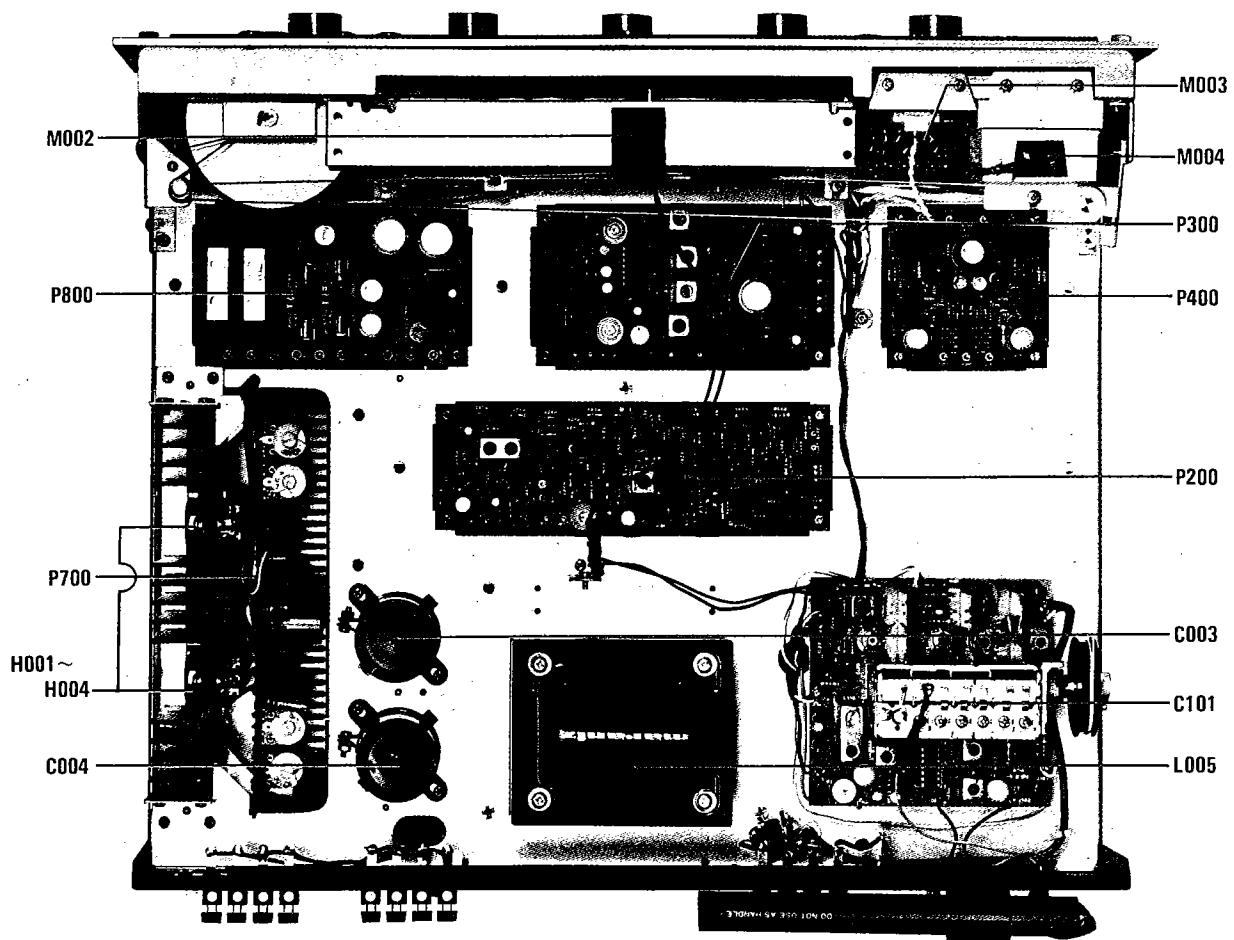


Figure 19. Main Chassis Component Locations (Bottom View) for European Model

## VOLTAGE CONVERSION


This model is equipped with a universal power transformer to permit operation at 110, 120, 220 or 240V AC 50 to 60Hz.

To convert the unit to the required voltage perform the following steps:


Remove the cover.

Change the jumper wires as illustrated below for the required AC voltage.


**CAUTION: DISCONNECT POWER SUPPLY CORD FROM AC OUTLET BEFORE CONVERTING VOLTAGE.**

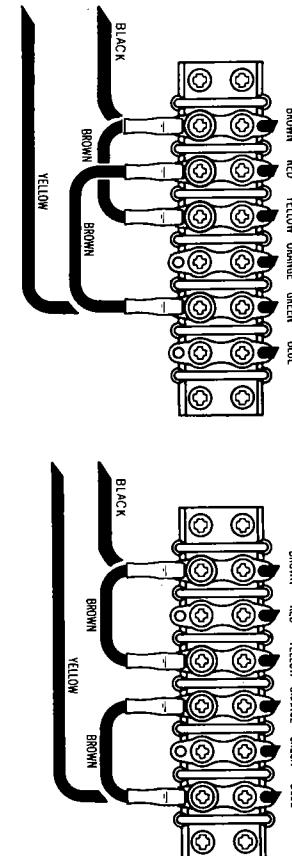


For 110V Operation

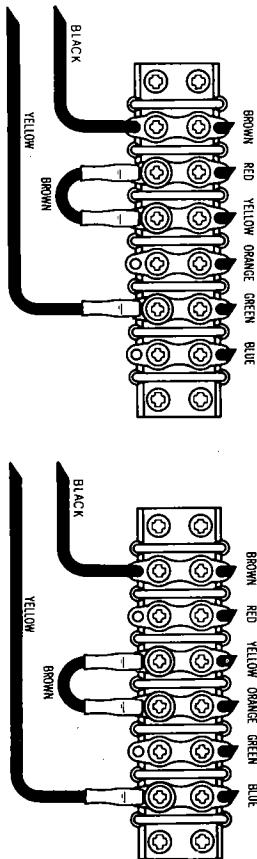

For 120V Operation

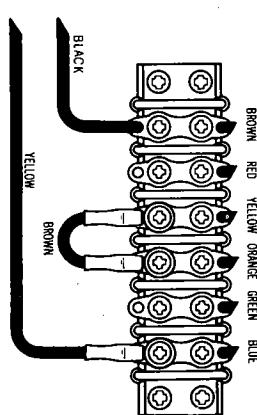

For 220V Operation

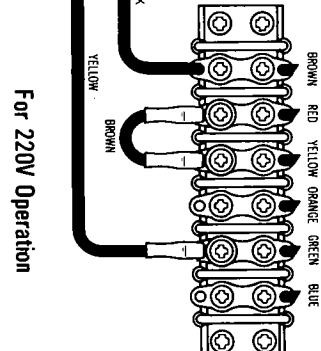


For 240V Operation

Figure 20. Voltage Conversion Chart

**Instruction for the use in the range other than specified in FTZ codes**

**Achtung für die Leute, die in dem Gebiet wohnen, wo die FTZ-Bestimmungen vorherrschend sind.**

Bitte das Gerät auch für Frequenzen ausserhalb des in den FTZ-Bestimmungen angegebenen Bereiches empfangebereit sein, bitten wir, den Bereich durch Nachstellen des Kernes in der Zillatospule (in der Abbildung mit "FTZ" gekennzeichnet) so zu korrigieren, dass er den Bestimmungen entspricht.

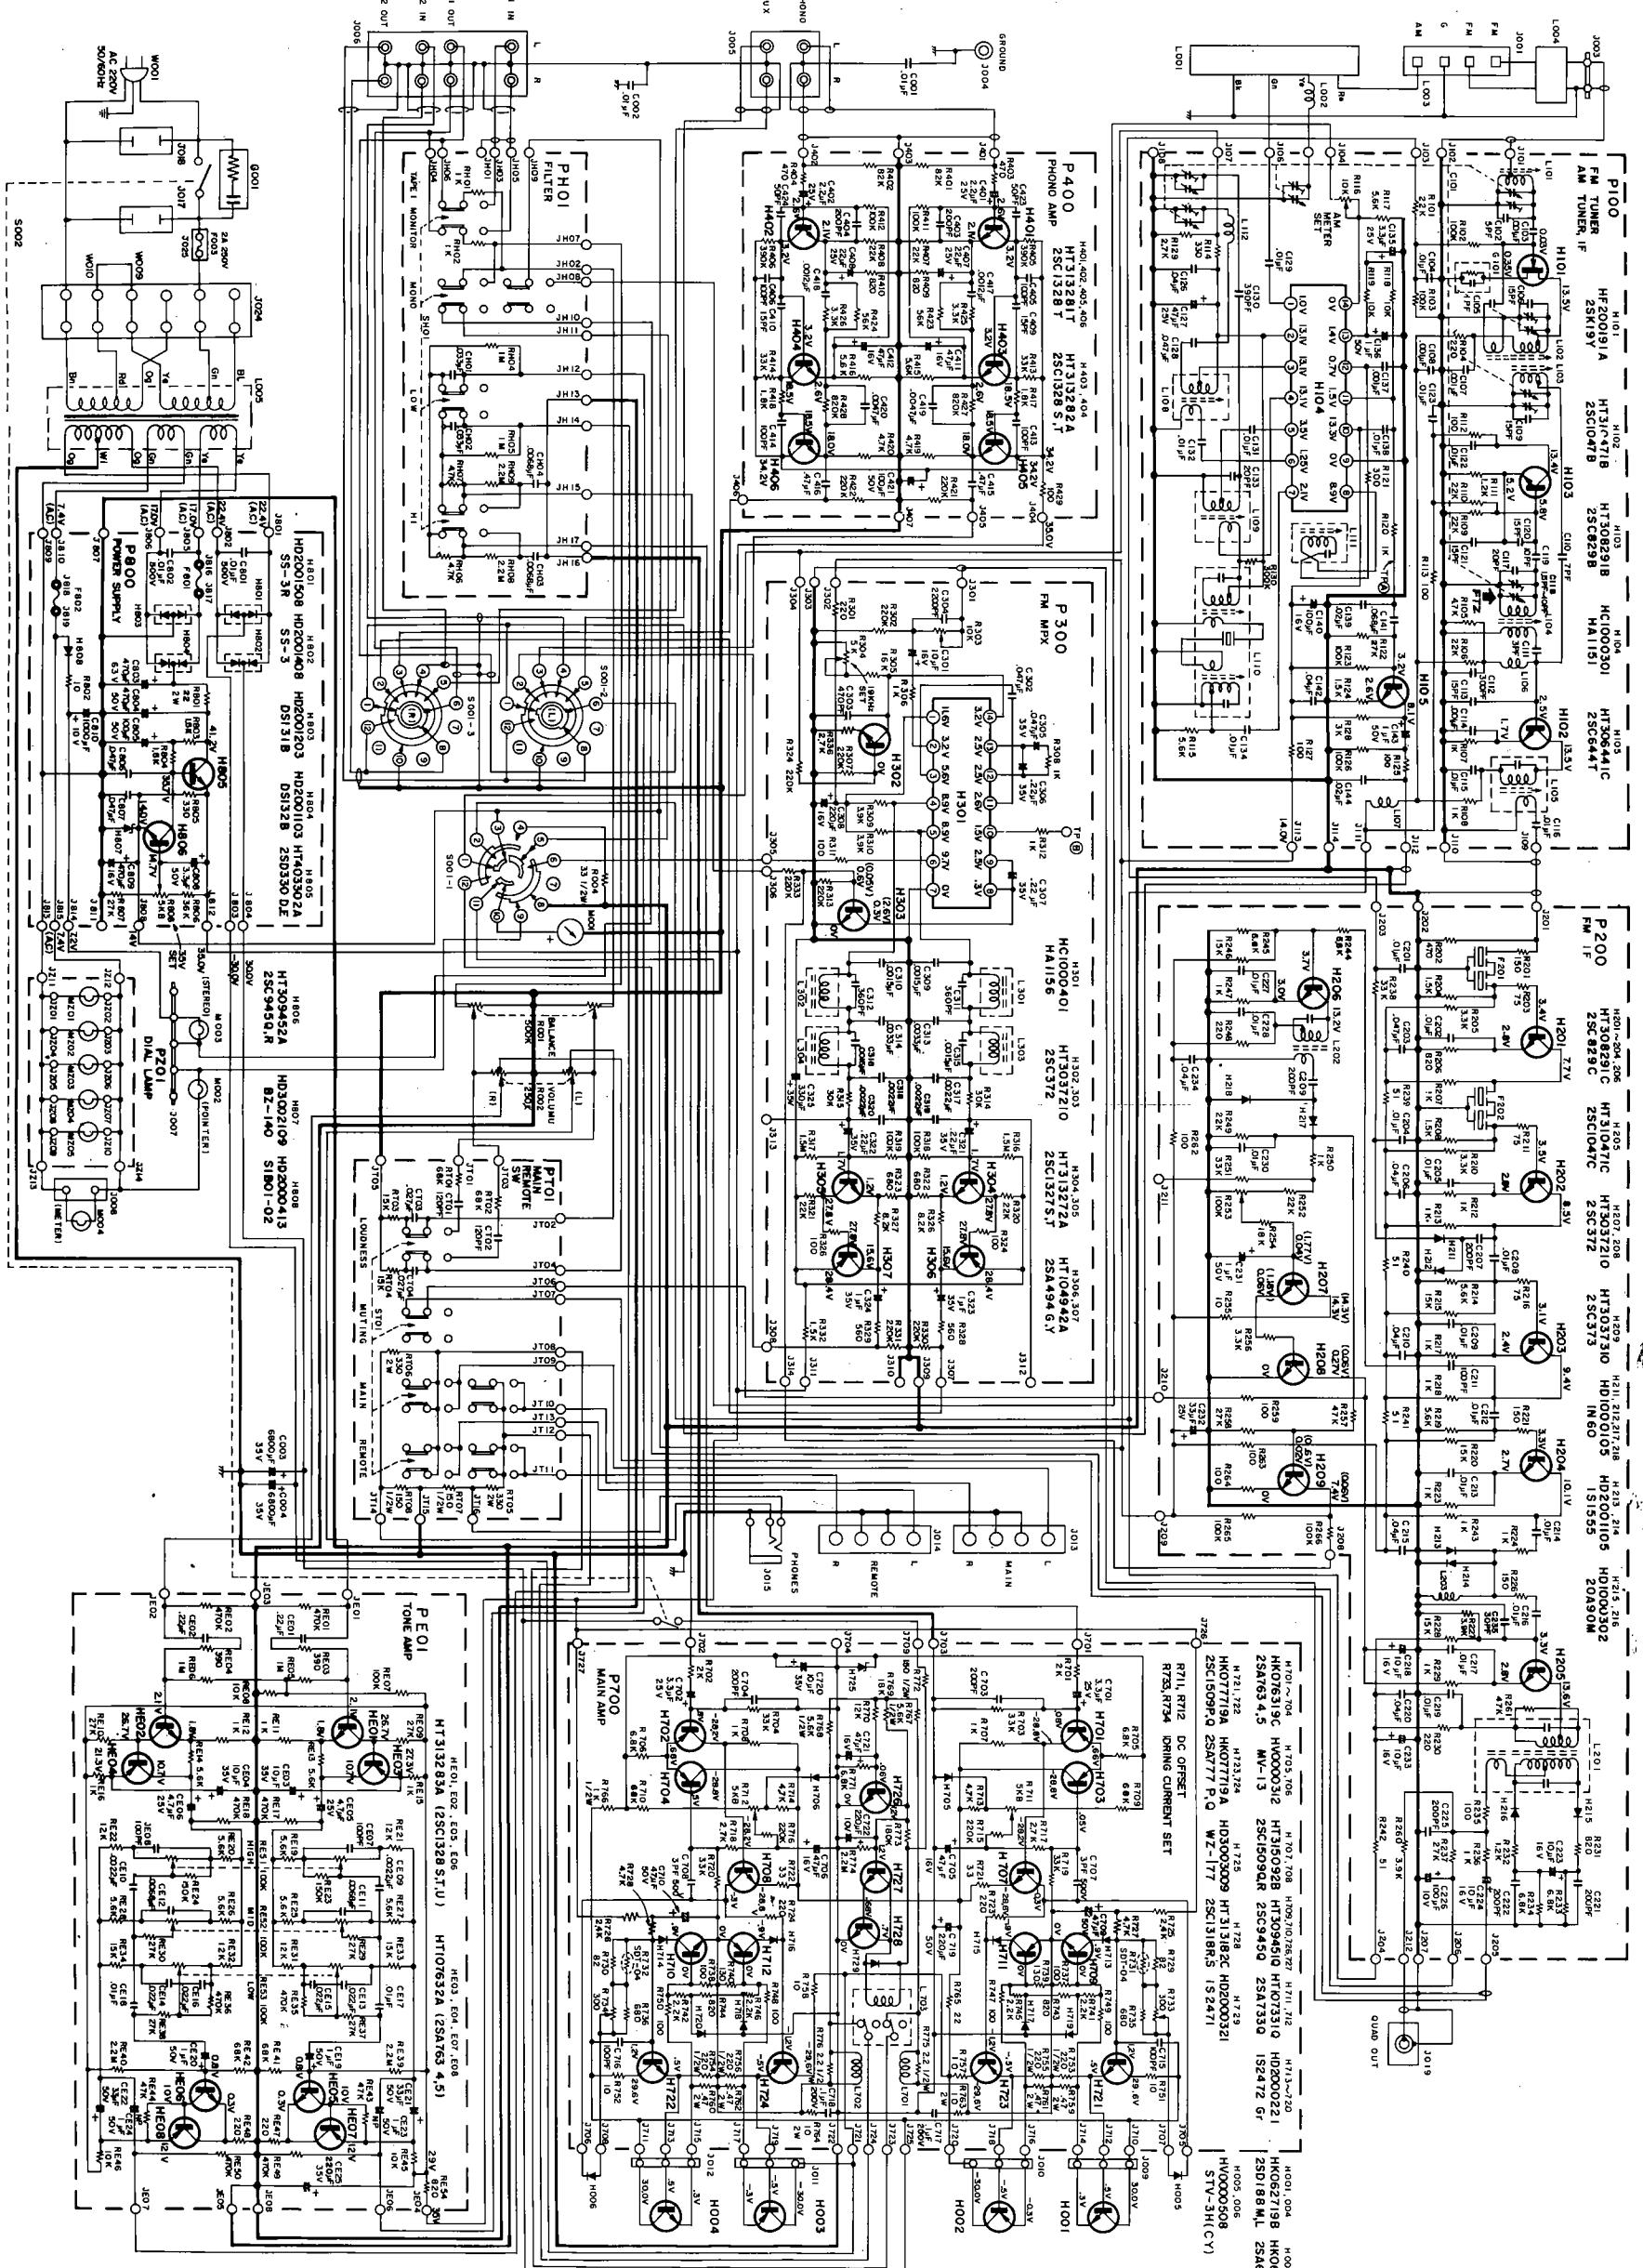

**Figure 21. Schematic Diagram for European Model**