

A new challenge in the amateur radio world . . .

Introducing 2m & 6m SSB/CW QRP Transceiver kit . . .



MX 2 (144 MHz band) and MX-6Z (50 MHz band) SSB/CW QRP . . .
Transceiver offers the user unlimited challenges in QRP. It creates a new dimension in amateur radio operation and lots of fun to play with. The major circuits are factory assembled and tested to insure superior performance. Just solder a few wires to switches and connectors and you are in operation. No special tools are needed, only about one hour of your time assembling, and you are ready to challenge the amateur world . . .

FEATURES

- 200mW for MX-2 and 250mW for MX-6Z
- MOS FET receiver front-end
- Noise blanker built in
- Single conversion receiver
- Built-in CW keyer
- VFO controlled (+ 50kHz per channel)
- External microphone and speaker jacks
- High quality crystal filter (7.8MHz)
- Provision for external DC operation
- 6x AAA dry-cell or 9V transistor battery (batteries are not included in the kit)


SPECIFICATIONS

- Model MX-2 144MHz band SSB/CW Transceiver
- Model MX-6Z 50MHz band SSB/CW Transceiver
- Operating Mode: A3J (USB), A1 (CW)
- Maximum Output Power: 200mW (MX-2), 250mW (MX-6Z)
- Spurious Output: Greater than 40dB down
- Sideband Suppression: Greater than 40dB
- Receiver Sensitivity: Less than 0.5 μ V for 15dB S/N
- Frequency Tuning Range: Maximum + 50kHz per channel
- No. of Channels: 2
- Power consumption: 40mA at Receive (no signal); 160mA at Transmit (MX-2); 180mA at Transmit (MX-6Z)
- Stability: \pm 100Hz/30 minutes at 25°C
- Size: 1 1/2" (D) x 2 1/4" (W) x 5 1/4" (H) without knob
- Weight: 13 oz. without battery

Manufactured by

MIZUHO COMMUNICATIONS CORP., Tokyo, Japan

OPERATING CONTROLS

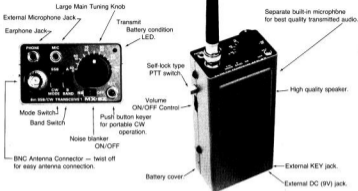

MX-2 2m(144MHz band) 144.20MHz — 144.25MHz Channel crystal is installed.
 MX-6Z 6m(50MHz band) 50.20MHz — 50.25MHz Channel crystal is installed.

AVAILABLE ACCESSORIES FOR MX-2 & MX-6Z

- Channel Crystal (Standard Frequency)

MX-2	COVERAGE	MX-6Z	COVERAGE
2X-05	144.05 — 144.10MHz	6X-05Z	50.05 — 50.10MHz
2X-10	144.10 — 144.15MHz	6X-10Z	50.10 — 50.15MHz
2X-15	144.15 — 144.20MHz	6X-15Z	50.15 — 50.20MHz
2X-25	144.25 — 144.30MHz	6X-25Z	50.25 — 50.30MHz
2X-30	144.30 — 144.35MHz	6X-30Z	50.30 — 50.35MHz
2X-35	144.35 — 144.40MHz	6X-35Z	50.35 — 50.40MHz
		6X-40Z	50.40 — 50.45MHz

- Channel Crystal (Special Frequency)

- M-3 Soft Leather Case & Hand Strap set.
- M-4 External Speaker-Microphone.
- 2M-2 DC Converter (12VDC — 9VDC), BNC-UHF Female Adaptor, Earphone and Belt Clip set.
- M-1

Imported by
 ACE COMMUNICATIONS, INC.
 2832-D Walnut Avenue, Tustin, CA 92680
 TEL (714) 544-8281 TLX 655-306 CABLE ACECOM TUSTIN CA