
YOUR MORROW DEALER:

SCI BIX




The TC-75 Converter

Companion Unit to Your PW-75

single hand installation. line. This compact unit is offered for economical pletely transistorized, there is no drain on the car mobile use where space is limited, and being com-The low-priced converter of the MORROW economy The small proportions of the TC unit-lends it to

battery. Physical measurements are: 1% in. W, 3 in.

crystal controlled. Any adequate car radio becomes eered transistor circuitry. The oscillator circuit is compliment the inherent stability of Morrow engin-Drift-free performance and high selectivity, further by two penlight cells having a usefulness equal to with the MORROW TC converter. Power is supplied tunable, dual-conversion super-het when used

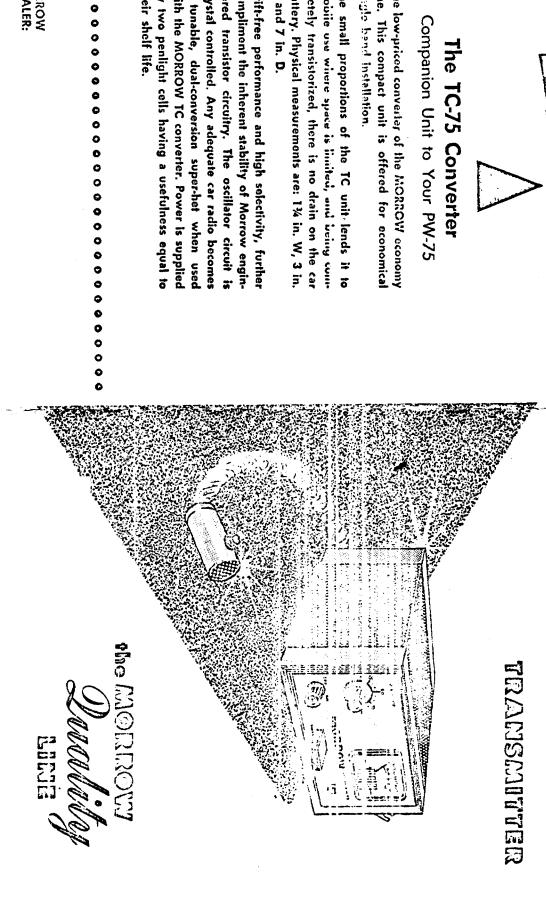

Specifications

- PW-75 is packaged complete with mike and mounting plate
- The Mounting Plate is drilled for easy underdash installation
- Tube Compliment: 12AU7 Oscillator (½)
 OZ4 Rectifier 6 & 12 V. 5Y3 Rectifier in 117 V. models

12AQ5 Final 6AQ5 6V. 12AQ5 Modulator 6AQ5 6V.

Current Drain:

6.3 volt

Power Input: 7 to 8 Watts

Power Output approx. 5 Watts

• B ∤- voltage: 250 volts

12.6 volt 11/5A. Standby
3/5A. Standby

Operate Operate

- Final current: (when loaded) 28 to 30 Ma.
- Installation Connect fuse pigtail to substantial battery source--Ground connection from PW Ground Terminal to firewall of vehicle is recom-Xtal frequency: Fundamental on 75 meters mended Connect to actenna with either RC58U or RC59U coax cable-28 to 30 Ma. plate current with normal primary voltage. diagramical de legal that the title amount mention a abdragination Hook antenna to coax connector marked Transmit Autonna-When Type FT-243
- Received anicoma jach is also provided with relay changeover when using same antenna for transmit and receive.

Parts List PW-75

×	F-2	£	1-WS	CH-I	3		RY	٧.١	1.	7-3	T-2	<u>:</u>	1-1	T-1	Ξ	
XIal Socket	Fuse Holder	Fuse 6V 10A, 12V SA.	Off-On switch	Bash Filler	0-50 Ma. meter	12 volt	DPDT Relay 6 volt	12 Volt Vibrator	6 volt Vibrator	Microphone transformer	Medulation transformer	117 volt power transformer 120-137	12 volt power transformer	6 volt power transformer	27 turns, 30 IPI, 1" dia.	
136 041	159-027		260-005	108-132		148-014	148-015	120.204	120-201	120-199	120-134	120-137	120-136	120-135		

