



Allied knight-kit[®] **MATCHING SPEAKER** **for** **COMMUNICATIONS RECEIVER** **83 Y 728**



This permanent-magnet type speaker is an excellent companion unit for your communications receiver. Its 8Ω impedance matches the receiver impedance, and the special design cone provides peaking of voice frequencies and reduction of static and other noises.

PARTS LIST

Quantity	Description	Part Number	Quantity	Description	Part Number
1	Cabinet	700034	1	Manual, instruction	750155
1	Cable clamp	532001	6	Nut, #4-36	570230
4	Foot, rubber	831001	5	Nut, #6-32	570340
1	Grille	731014	4	Screw, 6-32 x 1/2"	560346
1	Label "k"	724007	6	Screw, #4-36 x 1/2"	560240
6	Lockwasher #4	582200	1	Speaker, 5" PM	730016
1	Lockwasher #6	582300	2	Trim strip	470151


ALLIED RADIO

C O R P O R A T I O N



100 N. WESTERN AVE. • CHICAGO 80, ILL. HAYMARKET 1-6800

[®] Registered Trade-Mark of ALLIED RADIO CORP.

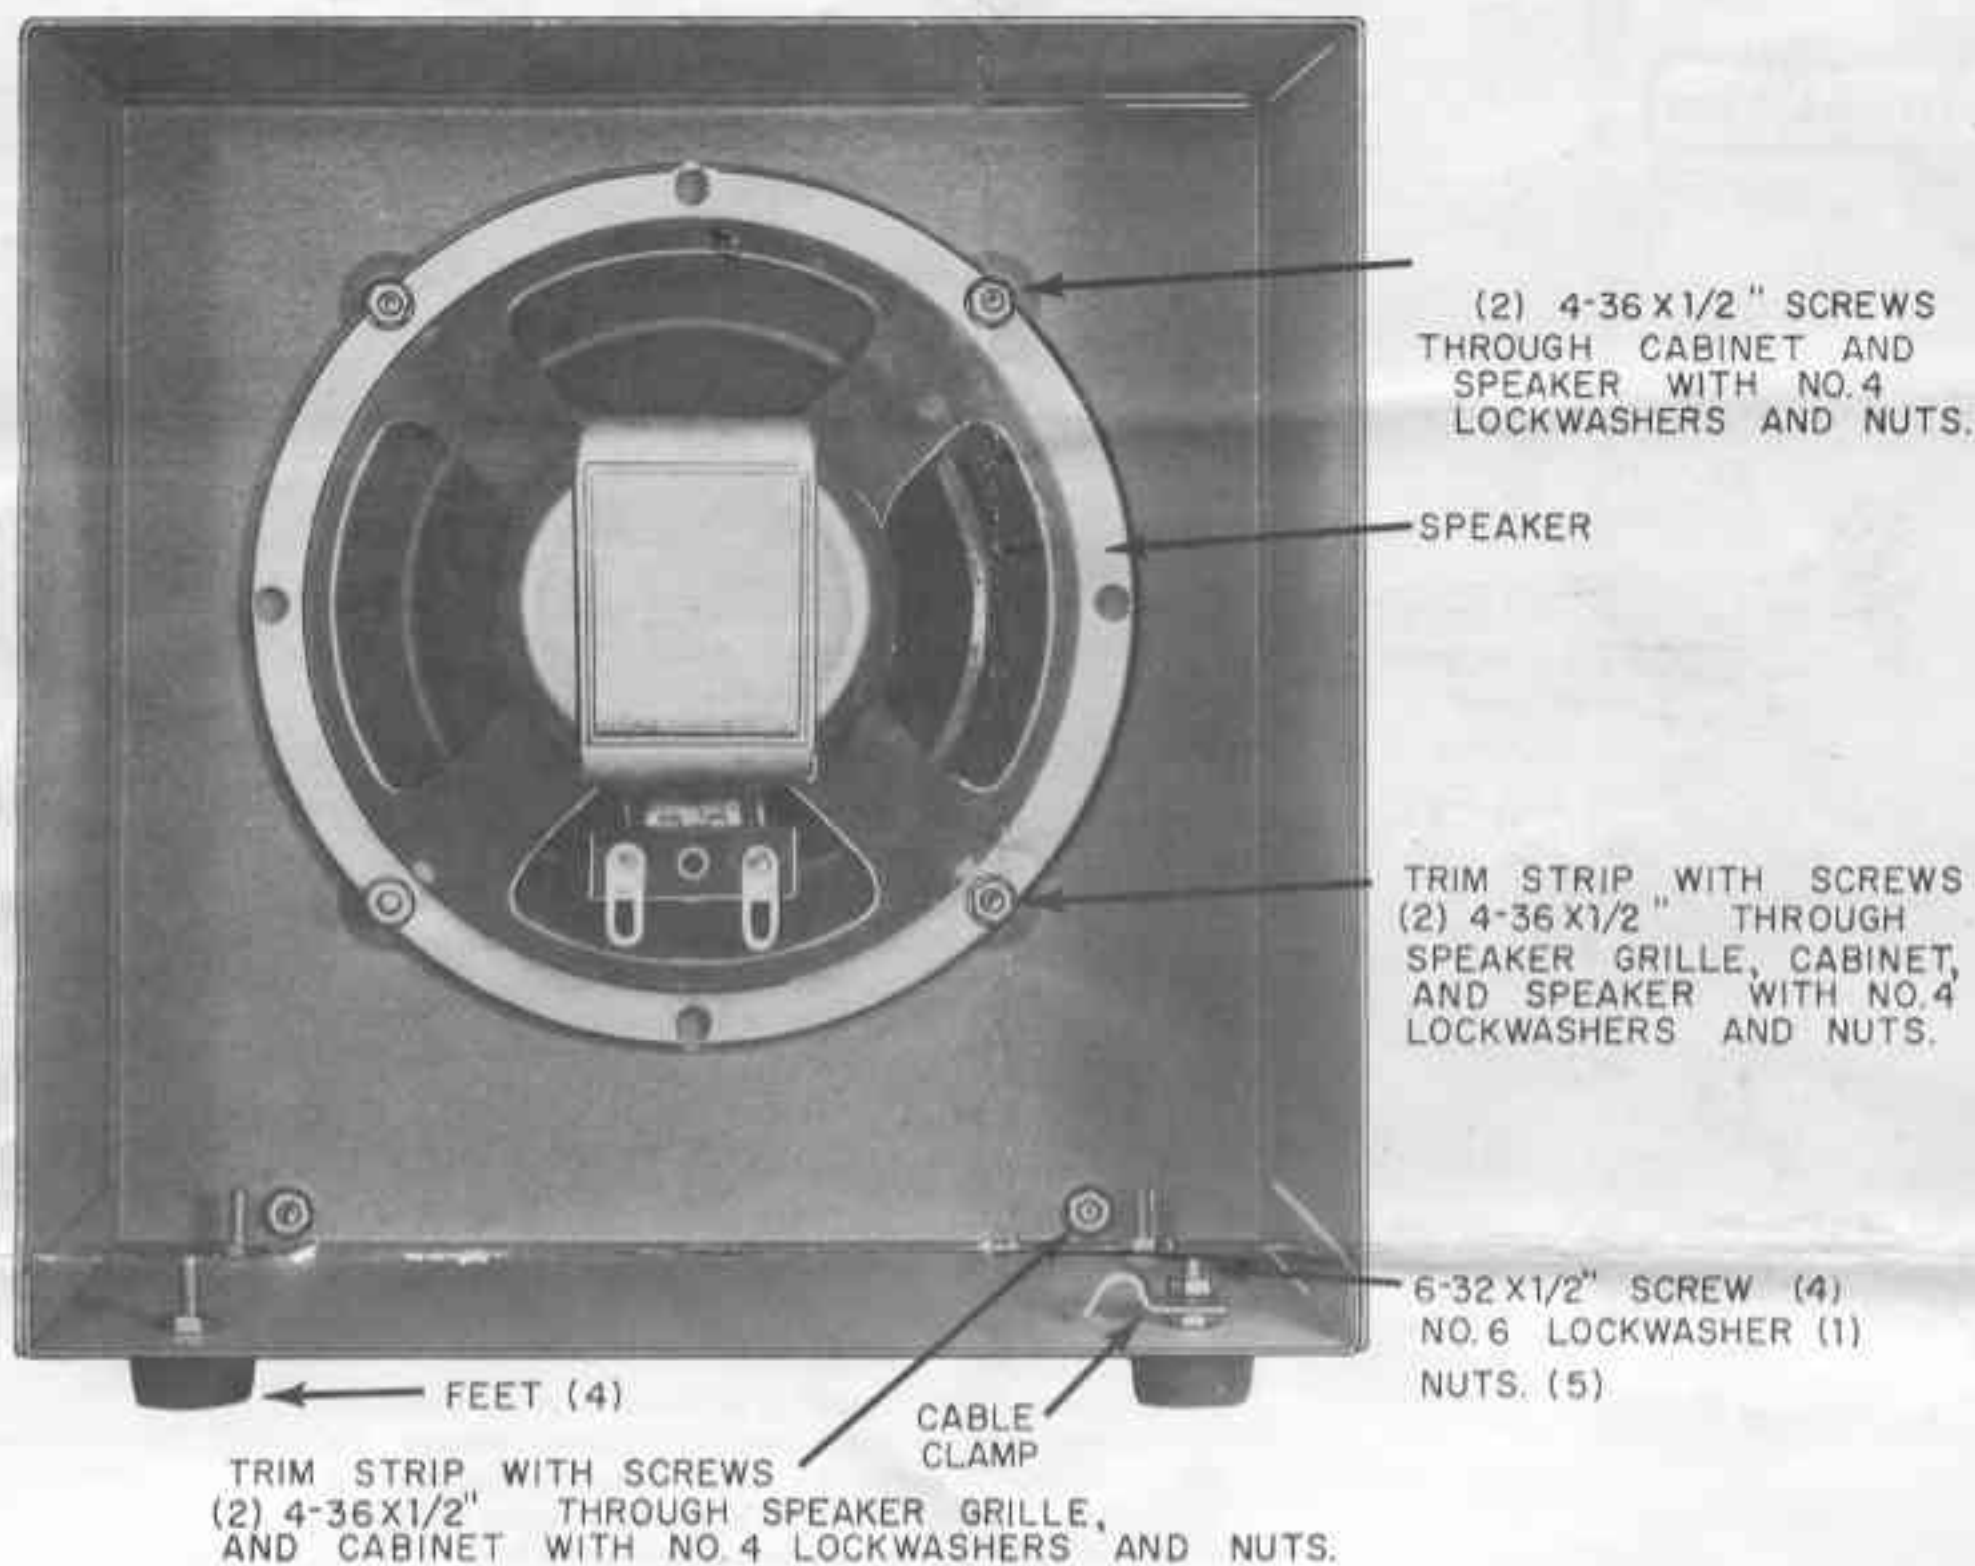

ASSEMBLY

Follow the details in the illustration to assemble your speaker. Notice that the two top screws to hold the speaker must be put in place before the grille is put on. Next, remove the protective covering from the back of the grille, and press it firmly against the cabinet front.

Slide the heads of two of the 4-36 x 1/2" screws into the back of the trim strip. Position the screws to line up with the bottom mounting holes for the speaker. Now insert the screws through the grille, the cabinet, and the speaker. Use two lockwashers, and tighten nuts over the screws. Mount the other trim strip at the bottom front of the cabinet in the same way.

Mount the four rubber feet as shown in the illustration. Notice that the cable clamp mounts on one screw with a lockwasher and another nut.

Remove the protective covering from the back of the "k" label. Press it firmly onto the grille in the upper right corner as shown in the photograph.

Position your speaker where desired. Connect a cable (or two wires) between the terminal strip on the speaker and the speaker terminals on your receiver.