

# CDX-1300/3800/3900

## SERVICE MANUAL

*US Model*

*Canadian Model*

CDX-1300

*E Model*

CDX-3800/3900



Photo: CDX-3900

- The tuner and CD sections have no adjustments.

Model Name Using Similar Mechanism	CDX-1150, CDX-3700
CD Drive Mechanism Type	MG-310-153

## SPECIFICATIONS

### AUDIO POWER SPECIFICATIONS (US, Canadian model)

#### POWER OUTPUT AND TOTAL HARMONIC DISTORTION

18 watts per channel minimum continuous average power into 4 ohms, 4 channels driven from 20 Hz to 20 kHz with no more than 1% total harmonic distortion.

#### Other Specifications

##### CD player section

System	Compact disc digital audio system
Signal-to-noise ratio	90 dB
Frequency response	10 – 20,000 Hz
Wow and flutter	Below measurable limit
Laser Diode Properties (US, Canadian model)	
Material	GaAs + GaAlAs
Wavelength	785 – 815 nm (Typ. 800 nm)
Emission Duration	Continuous
Laser output power	Less than 0.5 mW*

\* This output is the value measured at a distance of 0.7 mm from the objective lens surface on the Optical Pick-up Block.

##### Tuner section

##### FM

Tuning range	
US, Canadian model:	87.5 – 107.9 MHz
E model:	FM tuning interval: 50 kHz/200 kHz switchable 87.5 – 108.0 MHz (at 50 kHz step) 87.5 – 107.9 MHz (at 200 kHz step)
Antenna terminal	External antenna connector
Intermediate frequency	10.7 MHz
Usable sensitivity	12 dBf
Selectivity	75 dB at 400 kHz
Signal-to-noise ratio	65 dB (stereo), 68 dB (mono)
Harmonic distortion at 1 kHz	0.7% (stereo), 0.5% (mono)
Separation	35 dB at 1 kHz
Frequency response	30 – 15,000 Hz

##### AM

Tuning range	
US, Canadian model:	530 – 1,710 kHz
E model:	AM tuning interval: 9 kHz/10 kHz switchable 531 – 1,602 kHz (at 9 kHz step) 530 – 1,710 kHz (at 10 kHz step)
Antenna terminal	External antenna connector
Intermediate frequency	10.7 MHz/450 kHz
Sensitivity	30 µV

##### Power amplifier section

Outputs	Speaker outputs (sure seal connectors)
Speaker impedance	4 – 8 ohms

Maximum power output 45 W × 4 (at 4 ohms)

– Continued on next page –

**FM/AM COMPACT DISC PLAYER**



MICROFILM

**SONY®**

**General**

Outputs	Audio output Power amplifier control lead Power antenna relay control lead
Tone controls	Bass ±8 dB at 100 Hz Treble ±8 dB at 10 kHz
Power requirements	12 V DC car battery (negative ground)
Dimensions	Approx. 178 × 50 × 178 mm (7 1/8 × 2 × 7 1/8 in.) (w/h/d)
Mounting dimensions	Approx. 182 × 53 × 162 mm (7 1/4 × 2 1/8 × 6 1/2 in.) (w/h/d)
Mass	Approx. 1.2 kg (2 lb. 10 oz.)
Supplied accessories	Parts for installation and connections (1 set) Card remote commander RM-X49 (CDX-3900)

*Design and specifications are subject to change without notice.*

**SERVICE NOTE****CAUTION**

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

**Notes on Chip Component Replacement**

- Never reuse a disconnected chip component.
- Notice that the minus side of a tantalum capacitor may be damaged by heat.

**NOTES ON HANDLING THE OPTICAL PICK-UP BLOCK OR BASE UNIT**

The laser diode in the optical pick-up block may suffer electrostatic breakdown because of the potential difference generated by the charged electrostatic load, etc. on clothing and the human body. During repair, pay attention to electrostatic breakdown and also use the procedure in the printed matter which is included in the repair parts.

The flexible board is easily damaged and should be handled with care.

**NOTES ON LASER DIODE EMISSION CHECK**

The laser beam on this model is concentrated so as to be focused on the disc reflective surface by the objective lens in the optical pick-up block. Therefore, when checking the laser diode emission, observe from more than 30 cm away from the objective lens.

**SAFETY-RELATED COMPONENT WARNING!!**

**COMPONENTS IDENTIFIED BY MARK ▲ OR DOTTED LINE WITH MARK ▲ ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.**

**TABLE OF CONTENTS****1. GENERAL**

Location of controls .....	3
Getting Started .....	3
Setting the clock .....	3
CD Player .....	3
Radio .....	4
Other Functions .....	4
Connections .....	5

**2. DISASSEMBLY**

2-1. Key Board .....	7
2-2. Main Sub Assy .....	7
2-3. CD Mechanism Block .....	8
2-4. Heat Sink .....	8
2-5. Chassis (R) Block Assy .....	9
2-6. Floating Block Assy .....	9
2-7. Roller Arm Assy .....	10
2-8. Optical Pick-up Block .....	10

**3. DIAGRAMS**

3-1. IC Pin Description .....	11
3-2. Block Diagram –Main Section– .....	12
3-3. Block Diagram –Display Section– .....	13
3-4. Printed Wiring Boards –Main Section– .....	14
3-5. Schematic Diagram –Main Section (1/3)– .....	16
3-6. Schematic Diagram –Main Section (2/3)– .....	17
3-7. Schematic Diagram –Main Section (3/3)– .....	18
3-8. Schematic Diagram –Display Section– .....	19
3-9. Printed Wiring Board –Display Section– .....	20

**4. EXPLODED VIEWS**

4-1. Chassis Section .....	23
4-2. Front Panel Section .....	24
4-3. CD Mechanism Section (1) .....	25
4-4. CD Mechanism Section (2) .....	26

**5. ELECTRICAL PARTS LIST .....** 27**ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!!**


**LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE ▲ SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.**

# SECTION 1

## GENERAL

This section is extracted from  
CDX-3800/3900's instruction manual.

### Location of controls

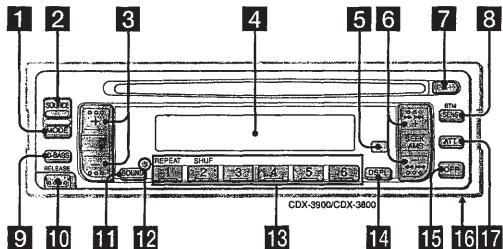


Refer to the pages for details.

- 1 MODE (band select) button 8, 9
- 2 SOURCE (source select) button 7, 8, 9
- 3 (volume/bass/treble/left-right) front/rear control buttons 7, 10
- 4 Display window
- 5 Sensor for the card remote commander (CDX-3900 only)
- 6 SEEK/AMS (seek/Automatic Music Sensor/manual search) control 8, 9
- 7 (eject) button 7
- 8 SENS/BTM (sensitivity adjust/Best Tuning Memory) button 8, 9
- 9 D-BASS button 10
- 10 RELEASE (front panel release) button 6, 11
- 11 SOUND button 7, 10
- 12 Reset button (located on the front side of the unit hidden by the front panel) 6

- 13 During radio reception:  
Number buttons 9
- During CD playback:  
① REPEAT button 8
- ② SHUF button 8
- 14 DSPL (display mode change/time set) button 7, 9
- 15 OFF button\* 6, 7
- 16 Frequency select switch (located on the bottom of the unit)  
See "Frequency select switch" in the Installation/Connections manual.
- 17 ATT (attenuate) button 10

- \*Warning when installing in a car without ACC (accessory) position on the ignition key switch  
Be sure to press OFF on the unit for two seconds to turn off the clock display after turning off the engine.  
When you press OFF momentarily, the clock display does not turn off and this causes battery wear.

**Card remote commander RM-X49  
(CDX-3900 only)**




The corresponding buttons of the card remote commander control the same functions as those on this unit.

- 1 OFF button
- 2 SOUND button
- 3 DSPL button
- 4 VOL (volume/bass/treble/left-right/front-rear control) button
- 5 PRST/DISC button
- 6 ATT button
- 7 SOURCE button
- 8 MODE button
- 9 SEEK/AMS button

### Replacing the lithium battery

When the battery becomes weak, the range of the card remote commander becomes shorter. Replace the battery with a new CR2025 lithium battery.



### Notes on lithium battery

- Keep the lithium battery out of the reach of children. Should the battery be swallowed, immediately consult a doctor.
- Wipe the battery with a dry cloth to assure a good contact.
- Be sure to observe the correct polarity when installing the battery.
- Do not hold the battery with metallic tweezers, otherwise a short-circuit may occur.


**WARNING**  
The battery may explode if mistreated.  
Do not recharge, disassemble, or dispose of in fire.

### Getting Started

#### Resetting the unit

Before operating the unit for the first time or after replacing the car battery, you must reset the unit.

Remove the front panel and press the reset button with a pointed object, such as a ballpoint pen.




- Notes
  - Pressing the reset button will erase the clock setting and some memorized functions.
  - When you connect the power supply cord to the unit or reset the unit, wait for about 10 seconds before you insert a disc. If you insert a disc within these 10 seconds, the unit will not be reset, and you will have to press the reset button again.

#### Notes

- Be sure not to drop the panel when detaching it from the unit.
- If you detach the panel while the unit is still turned on, the power will turn off automatically to prevent the speakers from being damaged.
- When carrying the front panel with you, use the supplied front panel case.

#### Attaching the front panel

Attach part A of the front panel to part B of the unit as illustrated and push the left side into position until it clicks.



#### Notes


- Be sure not to attach the front panel upside down.
- Do not press the front panel too hard against the unit when attaching it.
- Do not press too hard or put excessive pressure on the display window of the front panel.
- Do not expose the front panel to direct sunlight or heat sources such as hot air ducts, and do not leave it in a humid place. Never leave it on the dashboard of a car parked in direct sunlight or where there may be a considerable rise in temperature.

#### Detaching the front panel

You can detach the front panel of this unit to prevent the unit from being stolen.

1 Press OFF.

2 Press RELEASE, then slide the front panel a little to the left, and pull it off towards you.



#### Caution alarm

If you turn the car ignition off without removing the front panel, the caution alarm will beep for a few seconds.

If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.


### Setting the clock

The clock has a 12-hour digital indication.

Example: To set the clock to 10:08


1 Press DSPL during operation.

2 Press DSPL for two seconds.



The hour indication flashes.

① Set the hour.




To go forward  
To go backward




The minute indication flashes.

② Press SOUND.




The minute indication flashes.

③ Set the minute.



To go forward  
To go backward




The clock is set.

**Note**  
If the car has no accessory position on the ignition key switch, the clock cannot be set unless the power is turned on. Set the clock after you have turned on the radio, or started CD playback.


### CD Player

#### Listening to a CD

Insert a CD.  
Playback starts automatically.  
Label side up



If a CD is already inserted, press SOURCE repeatedly until "CD" appears to start playback.




Elapsed playing time  
To play back an 8 cm CD, use the optional Sony compact disc single adapter (CSA-8).

To Press  
Stop playback ▲ or OFF  
Eject the CD ▾


#### Changing the display item

Each time you press DSPL during CD playback, the item changes as follows:



#### Locating a specific track


- Automatic Music Sensor (AMS)
- During playback, press either side of **(SEEK/AMS)** for each track you want to skip.



#### Locating a specific point in a track

- Manual Search

During playback, press and hold either side of **(SEEK/AMS)** for about two seconds. Release when you have found the desired point.



**Note**  
If "L L L L" or "R R R" appears in the display, you have reached the beginning or the end of the disc and you cannot go any further.

### Playing a CD in various modes

#### Playing tracks repeatedly

- Repeat Play
- Press **(1)** during playback.  
"REPEAT" appears in the display.

When the current track is over, it will play again from the beginning.

To return to normal mode, press again.

#### Playing tracks in random order

- Shuffle Play
- Press **(2)** during playback.  
"SHUF" appears in the display.

To return to normal mode, press again.

## Radio

### Memorising stations automatically

#### — Best Tuning Memory (BTM)

This unit selects the stations with the strongest signals and memorises them in the order of their frequencies. You can store up to 6 stations on each band (FM I, FM II, FM III, and AM).

#### Caution

When tuning in stations while driving, use Best Tuning Memory to prevent accidents.

#### 1 Press **(SOURCE)** repeatedly to select the tuner.

Each time you press **(SOURCE)**, the mode changes as follows:  
CD → TUNER

#### 2 Press **(MODE)** repeatedly to select the band.

Each time you press **(MODE)**, the band changes as follows:

FM I → FM II → FM III → AM

#### 3 Press **(SENS/BTM)** for two seconds.

The unit stores stations in the order of their frequencies on the number buttons.  
A beep sounds when the setting is stored.

**Note**  
• The unit does not store stations with weak signals. If only a few stations can be received, some number buttons will retain their former setting.

• When a number is indicated in the display, the unit starts storing stations from the one currently displayed.

• If a CD is not in the unit, only the tuner band

appears even if you press **(SOURCE)**.

### Memorising only the desired stations

You can store up to 6 stations on each band (a total of 18 for FM I, FM II, and FM III, and 6 for AM) in the order of your choice.

#### 1 Press **(SOURCE)** repeatedly to select the tuner.

#### 2 Press **(MODE)** repeatedly to select the band.

#### 3 Press and hold either side of **(SEEK/AMS)** to tune in the station that you want to store on the number button.

#### 4 Press and hold the desired number button (1) to (6) until "MEM" appears. The number button indication appears in the display.

**Note**  
If you try to store another station on the same number button, the previously stored station will be erased.

#### If you cannot tune in a preset station

Press either side of **(SEEK/AMS)** to search for the station (automatic tuning). Scanning stops when the unit receives a station. Press either side of **(SEEK/AMS)** repeatedly until the desired station is received.

**Note**  
If the automatic tuning stops too frequently, press **(SENS/BTM)** repeatedly until "LOCAL" (local seek mode) is displayed. Only the stations with relatively strong signals will be tuned in.

#### If FM stereo reception is poor

#### — Monaural Mode

Press **(SENS/BTM)** repeatedly until "MONO" appears.  
The sound improves, but becomes monaural ("STEREO" disappears).

To return to normal mode, press again until "MONO" disappears.

### Changing the display item

Each time you press **(DSPL)**, the item changes as follows:  
Frequency ↔ Clock

### Receiving the memorised stations

#### 1 Press **(SOURCE)** repeatedly to select the tuner.

#### 2 Press **(MODE)** repeatedly to select the band.

#### 3 Press the number button (1) to (6) on which the desired station is stored.

## Other Functions

### Adjusting the sound characteristics

You can adjust the bass, treble, balance, and fader. You can store the bass and treble levels. Each source can store the bass and treble levels independently.

#### 1 Select the item you want to adjust by pressing **(SOUND)** repeatedly.


BAS (bass) → TRE (treble) → BALANCE (left-right) → FADER (front-rear) → VOL (volume)

#### 2 Adjust the selected item by pressing **(+)** or **(-)**. Adjust within three seconds after selecting the item. (After three seconds, the buttons function reverts to volume control.)

### Boosting the bass sound

#### — D-bass

You can enjoy a clear and powerful bass sound. The D-bass function boosts the low frequency and high frequency signal with a sharper curve than conventional bass boost. You can hear the bass line more clearly even while the vocal volume remains the same. You can emphasize and adjust the bass sound easily with the D-BASS control.



#### Adjusting the bass curve

Press **(D-BASS)** repeatedly to select the desired bass curve.  
"D-BASS" appears in the display.  
As the D-BASS number increases so does the effect.

D-BASS 1 → D-BASS 2 → D-BASS 3 → D-BASS OFF

#### Note

The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

### Cancel the beep sound

Press **(6)** while pressing **(SOUND)**.

To obtain the beep sound again, press these buttons again.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

**Note**  
If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.

To restore the previous volume level, press **(ATT)** again.

**Note**  
The bass sound may distort at same volume. If the bass sound distorts, select less effective bass curve.

# Connections

## Caution

- This unit is designed for negative earth 12 V DC operation only.
- Before making connections, disconnect the earth terminal of the car battery to avoid short circuits.
- Connect the yellow and red power input leads only after all other leads have been connected.
- Be sure to connect the red power input lead to the positive 12 V power terminal which is energized when the ignition key is in the accessory position.
- Run all earth wires to a common earth point.
- Connect the yellow cord to a free car circuit rated higher than the unit's fuse rating. If you connect this unit in series with other stereo components, the car circuit they are connected to must be rated higher than the sum of the individual component's fuse rating. If there are no car circuits rated as high as the unit's fuse rating, connect the unit directly to the battery. If no car circuits are available for connecting this unit, connect the unit to a car circuit rated higher than the unit's fuse rating in such a way that if the unit blows its fuse, no other circuits will be cut off.

## Warning when installing in a car without ACC (accessory) position on the ignition key switch

Be sure to press **(OFF)** on the unit for two seconds to turn off the clock display after turned off the engine. When you press **(OFF)** momentarily, the clock display does not turn off and this causes battery wear.

## Frequency select switch

The AM (FM) tuning interval is factory-set to the 9K (50k) position. If the frequency allocation system of your country is based on 10 kHz (200 kHz) interval, set the switch on the bottom of the unit to the 10K (200K) position before making connections.

## Reset button

When the installation and connections are complete, be sure to press the reset button with a ballpoint pen etc.

# Conexiones

## Precauciones


- Esta unidad ha sido diseñada para alimentarse solamente con 12 V CC, negativo a masa.
- Antes de realizar las conexiones, desconecte el terminal de puesta a masa de la batería a fin de evitar cortocircuitos.
- Conecte los cables conectores de alimentación amarillo y rojo solamente después de haber conectado los demás.
- Cerciórese de conectar el cable conector de alimentación rojo a un terminal de 12 V positivo que se energice al poner la llave de encendido en la posición para accesorios.
- Conecte todos los conductores de puesta a masa a un punto común.
- Conecte el cable amarillo a un circuito libre del automóvil que tenga una capacidad superior a la del fusible de la unidad. Si conecta esta unidad en serie con otros componentes estereofónicos, el circuito del automóvil al que se encuentren conectados debe tener una capacidad superior a la de la suma de las capacidades de los fusibles de cada componente. Si ningún circuito del automóvil tiene una capacidad tan alta como la del fusible de la unidad, conecte ésta directamente a la batería. Si el automóvil no dispone de ningún circuito para conectar esta unidad, conectela a un circuito del automóvil con capacidad superior a la del fusible de la unidad, de forma que si se funde el fusible de ésta, no se interrumpe ningún otro circuito.

## Advertencia sobre la instalación en un automóvil que no disponga de posición ACC (accesorios) en el interruptor de la llave de encendido

Asegúrese de pulsar **(OFF)** en la unidad durante dos segundos para desactivar la indicación del reloj una vez apagado el motor. Si pulsa **(OFF)** momentáneamente, la indicación del reloj no se desactivará y esto causará el desgaste de la batería.


## Selector de frecuencia

El intervalo de sintonía de AM (FM) ha sido ajustado en fábrica a la posición 9K (50K). Si el sistema de asignación de frecuencias de su país se basa en el intervalo de 10 kHz (200 kHz), ponga este selector, situado en la base de la unidad, en la posición 10K (200K) antes de realizar las conexiones.



## Botón de restauración


Cuando finalice la instalación y las conexiones, cerciórese de presionar el botón de restauración con un bolígrafo, etc.




## Connection diagram

Equipment used in illustrations (not supplied) Equipo utilizado en las ilustraciones (no suministrado) 插圖中的器材（無附帶）		Power amplifier Amplificador de potencia 功率放大器		Front speaker Altavoces delantero 前揚聲器		Rear speaker Altavoces trasero 後揚聲器
--	---	--	--	--	---	---

I

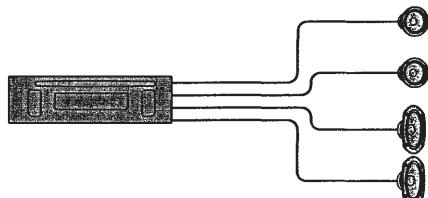

II

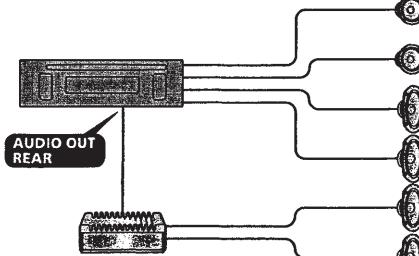

### Notes

- Be sure to connect the earth cord before connecting the amplifier.
- If you connect an optional power amplifier and do not use the built-in amplifier, the beep sound will be deactivated.
- Asegúrese de conectar primero el cable de puesta a masa antes de realizar la conexión al amplificador.
- Si conecta un amplificador de potencia opcional y no utiliza el incorporado, los pitidos se desactivarán.
- 務必在接放音器之前連接地線。
- 如果您連接了選購件的功率放大器而不使用內裝的放大器，將無鳴聲功能。

## Connection example Ejemplo de conexiones 連接舉例

to the power aerial control lead or power supply lead of an aerial booster amplifier

<Notes>

- It is not necessary to connect this lead if there is no power aerial or antenna booster, or with a manually-operated telescopic aerial.
- When your car has a built-in FM/AM aerial in the rear/side glass, see "Notes on the control leads."

al cable de control de la antena motorizada o al cable de fuente de alimentación del amplificador de antena

<Notas>

- Si no se dispone de antena motorizada ni de amplificador de antena, o se utiliza una antena telescópica accionada manualmente, no será necesario conectar este cable.
- Si el automóvil incorpora una antena de FM/AM en el cristal trasero/lateral, consulte "Notas sobre conductores de control".

至電動天線控制導線或天線升壓放大器的電源導線

<註>

- 如無電動天線或無天線升壓器，或帶有手動操作的拉杆天線時，便不必連接此導線。
- 當您的汽車在後/側玻璃窗上有內置FM/AM天線時，即請參看“控制導線須知”。

al cable de control de la antena motorizada o al cable de fuente de alimentación del amplificador de antena

<Notas>

- Si no se dispone de antena motorizada ni de amplificador de antena, o se utiliza una antena telescópica accionada manualmente, no será necesario conectar este cable.
- Si el automóvil incorpora una antena de FM/AM en el cristal trasero/lateral, consulte "Notas sobre conductores de control".

至電動天線控制導線或天線升壓放大器的電源導線

<註>

- 如無電動天線或無天線升壓器，或帶有手動操作的拉杆天線時，便不必連接此導線。
- 當您的汽車在後/側玻璃窗上有內置FM/AM天線時，即請參看“控制導線須知”。

al cable de control de la antena motorizada o al cable de fuente de alimentación del amplificador de antena

<Notas>

- Si no se dispone de antena motorizada ni de amplificador de antena, o se utiliza una antena telescópica accionada manualmente, no será necesario conectar este cable.
- Si el automóvil incorpora una antena de FM/AM en el cristal trasero/lateral, consulte "Notas sobre conductores de control".

至電動天線控制導線或天線升壓放大器的電源導線

<註>

- 如無電動天線或無天線升壓器，或帶有手動操作的拉杆天線時，便不必連接此導線。
- 當您的汽車在後/側玻璃窗上有內置FM/AM天線時，即請參看“控制導線須知”。

al cable de control de la antena motorizada o al cable de fuente de alimentación del amplificador de antena

<Notas>

- Si no se dispone de antena motorizada ni de amplificador de antena, o se utiliza una antena telescópica accionada manualmente, no será necesario conectar este cable.
- Si el automóvil incorpora una antena de FM/AM en el cristal trasero/lateral, consulte "Notas sobre conductores de control".

至電動天線控制導線或天線升壓放大器的電源導線

<註>

- 如無電動天線或無天線升壓器，或帶有手動操作的拉杆天線時，便不必連接此導線。
- 當您的汽車在後/側玻璃窗上有內置FM/AM天線時，即請參看“控制導線須知”。

al cable de control de la antena motorizada o al cable de fuente de alimentación del amplificador de antena

<Notas>

- Si no se dispone de antena motorizada ni de amplificador de antena, o se utiliza una antena telescópica accionada manualmente, no será necesario conectar este cable.
- Si el automóvil incorpora una antena de FM/AM en el cristal trasero/lateral, consulte "Notas sobre conductores de control".

### Notes on the control leads


- The ANT REM lead (blue) supplies +12 V DC when you turn on the unit.
- When your car has a built-in FM/AM aerial in the rear/side glass, it is necessary to connect the power aerial control lead (blue) or the accessory power input lead (red) to the power terminal of the existing aerial booster. For details, consult your dealer.
- A power aerial without relay box cannot be used with this unit.

### Memory hold connection

When the yellow power input lead is connected, power will always be supplied to the memory circuit even when the ignition key is turned off.

### Notes on speaker connection

- Before connecting the speakers, turn the unit off.
- Use speakers with an impedance of 4 to 8 ohms, and with adequate power handling capacities. Otherwise, the speakers may be damaged.
- Do not connect the terminals of the speaker system to the car chassis, and do not connect the terminals of the right speaker with those of the left speaker.
- Do not attempt to connect the speakers in parallel.
- Do not connect any active speakers (with built-in amplifiers) to the speaker terminals of the unit. Doing so may damage the active speakers. Therefore, be sure to connect passive speakers to these terminals.

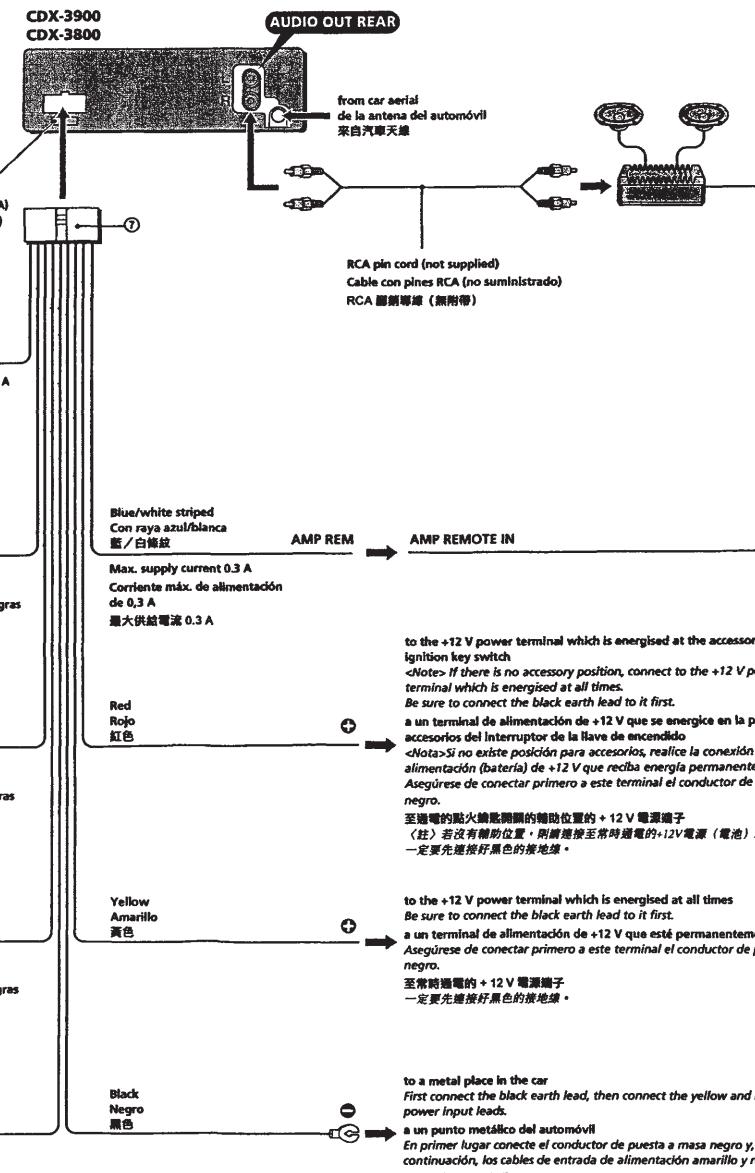

### Notas sobre conductores de control

- El conductor ANT REM (azul) suministra +12 V CC cuando conecte la alimentación de la unidad.
- Si el automóvil dispone de una antena de FM/AM incorporada en el cristal trasero/lateral, será necesario conectar el cable de control de antena motorizada (azul) o el cable auxiliar de entrada de alimentación (rojo) al terminal de alimentación del amplificador de antena existente. Para obtener información detallada, consulte a su proveedor.
- Con esta unidad no podrá emplearse una antena motorizada desprovista de caja de relé.

### Conexión para protección de la memoria

Si conecta el conductor de entrada de alimentación amarillo, el circuito de la memoria recibirá siempre alimentación, incluso aunque sitúe la llave de encendido en la posición de desactivación.

### Notas sobre la conexión de los altavoces

- Antes de conectar los altavoces, desconecte la alimentación de la unidad.
- Utilice altavoces con una impedancia de 4 a 8 ohmios, y con la potencia máxima admisible adecuada, ya que de lo contrario podría dañarlos.
- No conecte los terminales del sistema de altavoces al chasis del automóvil, ni los del altavoz izquierdo a los del derecho.
- No intente conectar los altavoces en paralelo.
- No conecte altavoces activos (con amplificadores incorporados) a los terminales de altavoces de la unidad. Si lo hiciese, podría dañar tales altavoces. Por tanto, cerciórese de conectar altavoces pasivos a estos terminales.

### 控制電線須知

- 當打開點火開關時，ANT REM 导線（藍色）將供給 +12 V DC 電流。
- 當您的汽車在後/側玻璃窗上有內置FM/AM天線時，即請把電動天線升壓放大器的電源導線（藍色）或附屬電源輸入導線（紅色）連接到現有的天線升壓放大器的電源端子上。詳細內容，請諮詢經銷商。
- 不帶繼電器的電動天線是不能用於本機的。

### 保持存儲的接線

常連接著黃色電源輸入導線時，即使關掉了點火開關，仍可保持經常供給存儲電路的電源。


### 連接觸發器需知

- 要連接觸發器時，必須先關掉繼電器電源。
- 請使用阻抗4到8歐和適當的功率使用容量的觸發器。否則，觸發器可能會被損壞。
- 別將擴音器系統的端子連接到汽車底盤，也不要將右揚聲器的端子連接左揚聲器的端子。
- 不可試圖並聯揚聲器。
- 別將任何有源擴音器（內裝有放大器的）連接到擴音器的揚聲器端子。請注意在這些端子上一定只能連接無源擴音器使用。


## SECTION 2 DISASSEMBLY

**Note :** Follow the disassembly procedure in the numerical order given.


### 2-1. KEY BOARD

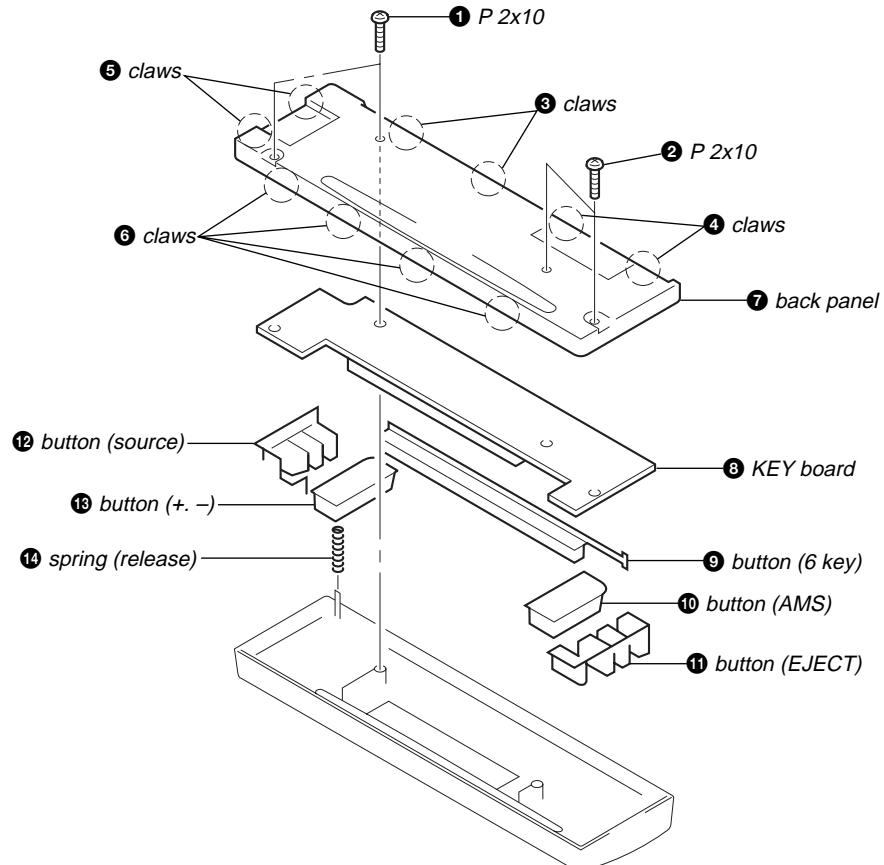


### 2-2. MAIN SUB ASSY

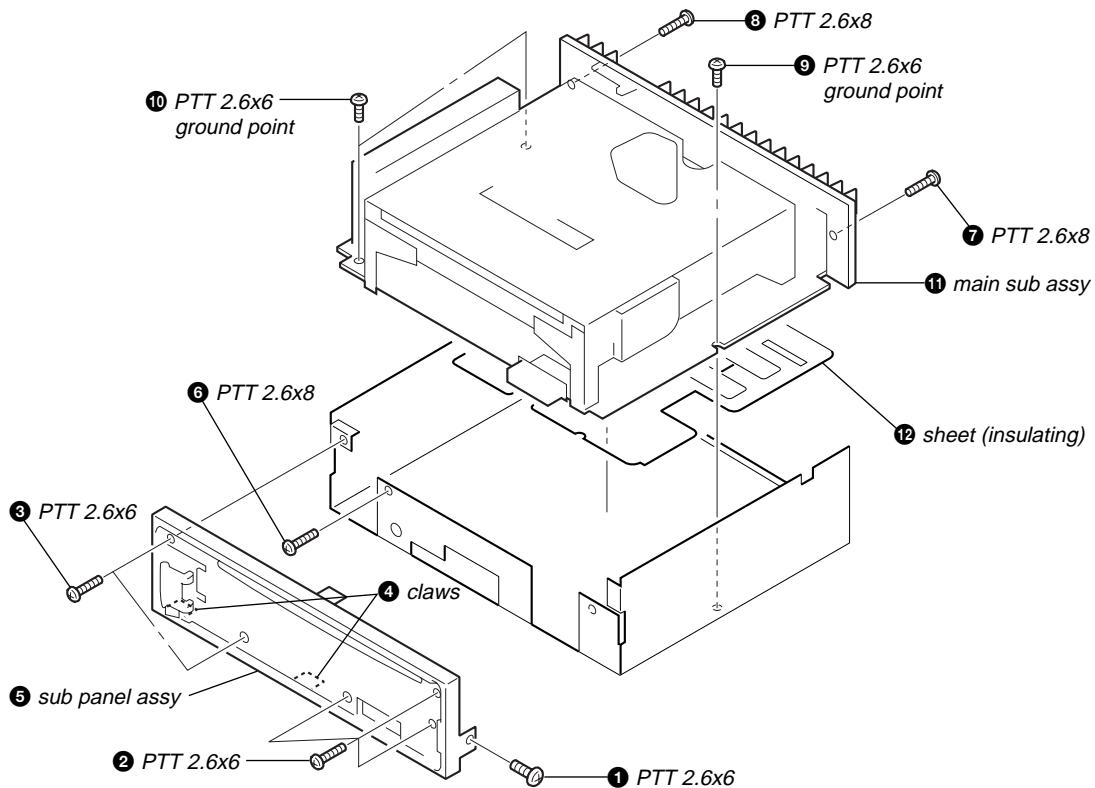


## 2-3. CD MECHANISM BLOCK

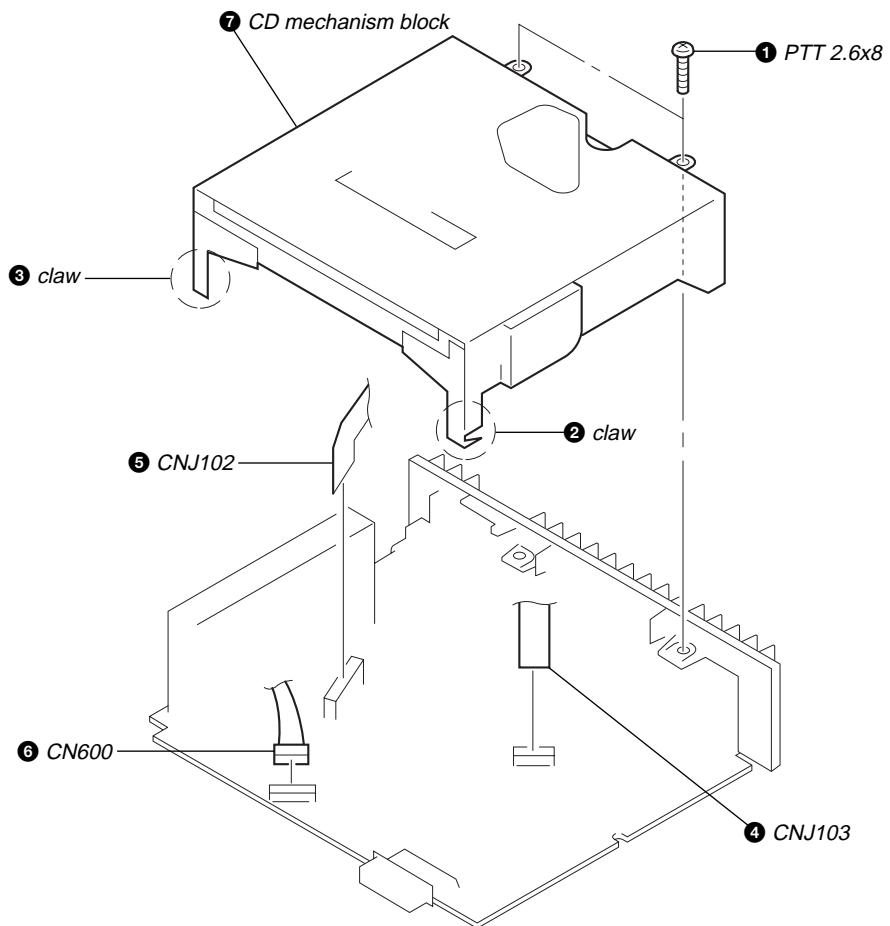


## 2-4. HEAT SINK

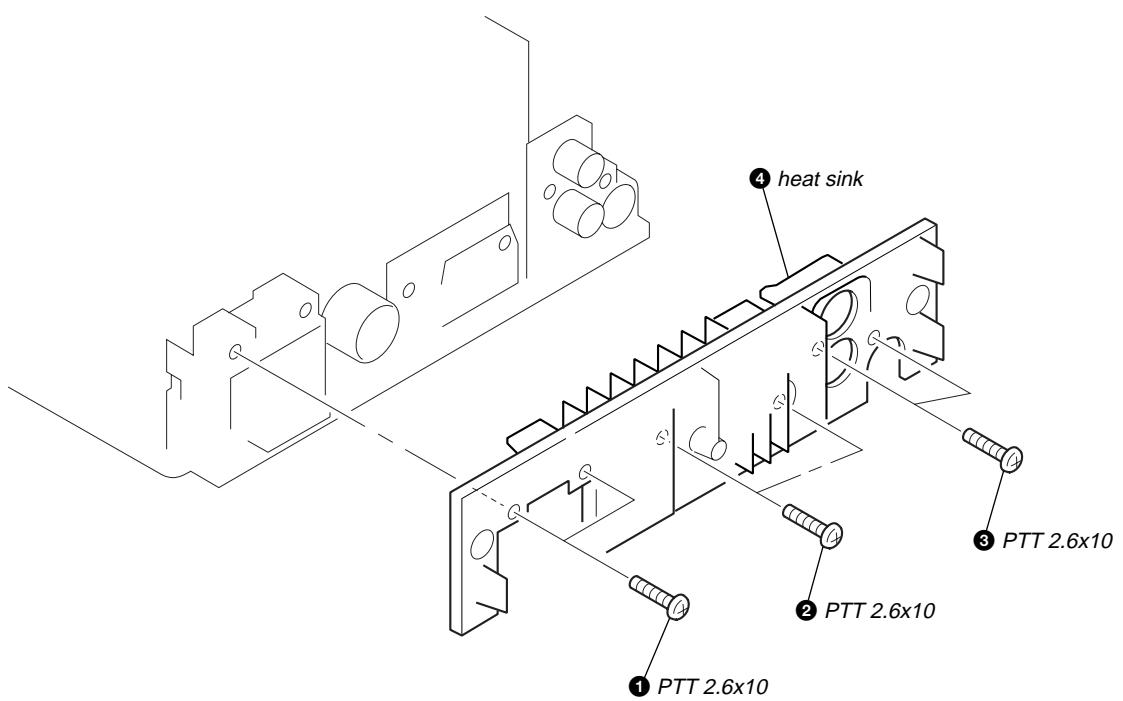

## 2-5. CHASSIS (R) BLOCK ASSY

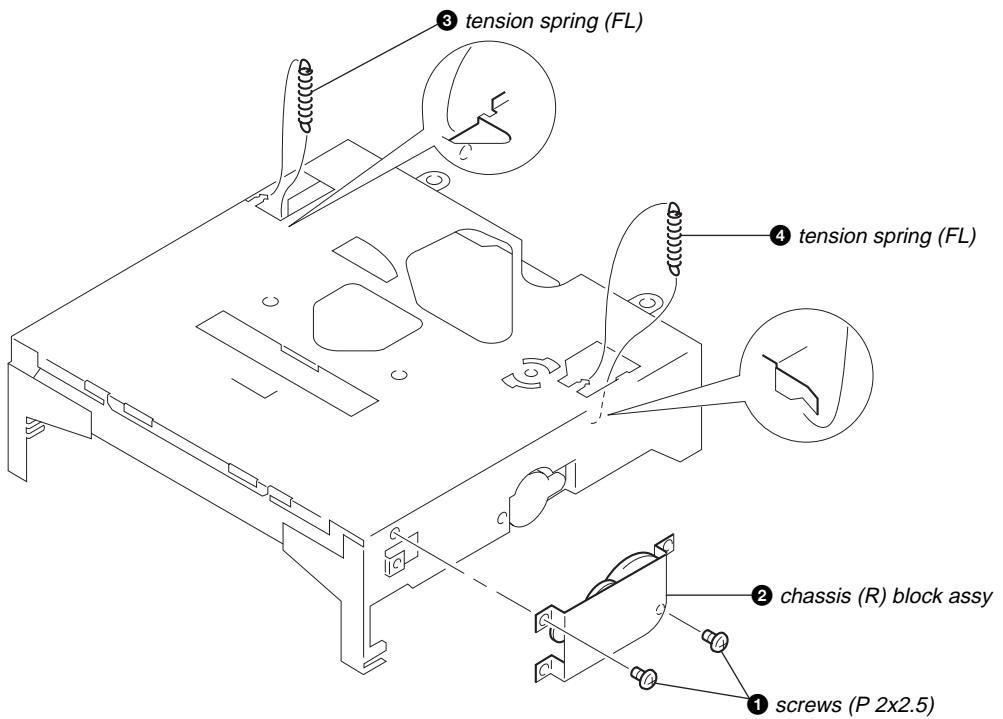


## 2-6. FLOATING BLOCK ASSY

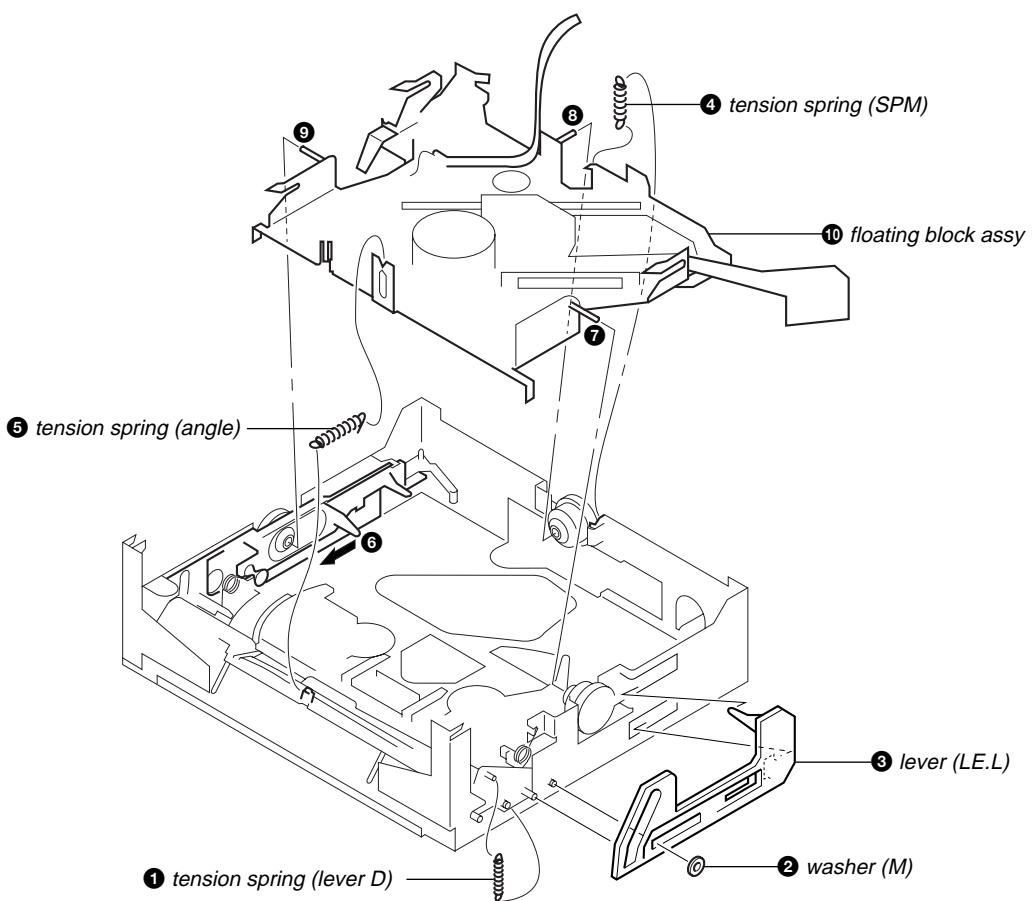


## 2-7. ROLLER ARM ASSY

Note : When replacing the spring roller, replace the rollers at the right and left ends at the same time.

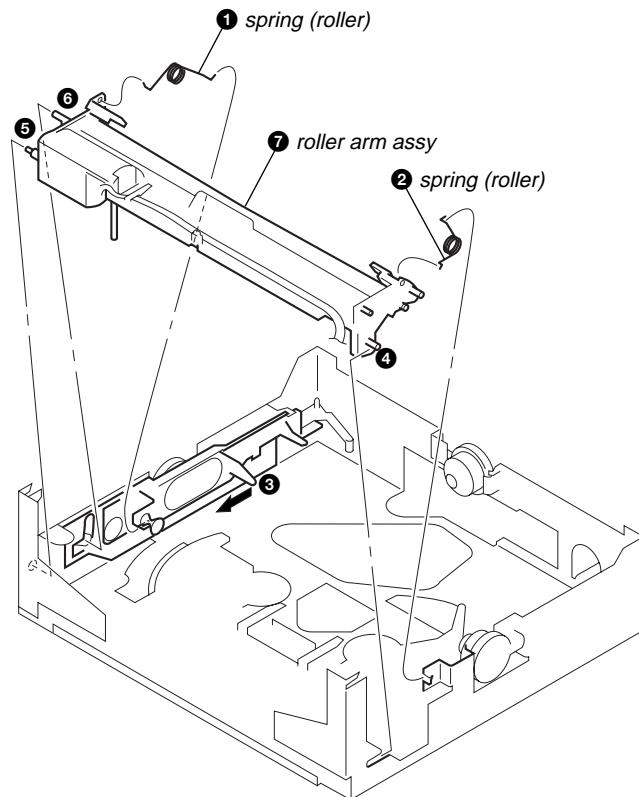

## 2-8. OPTICAL PICK-UP BLOCK

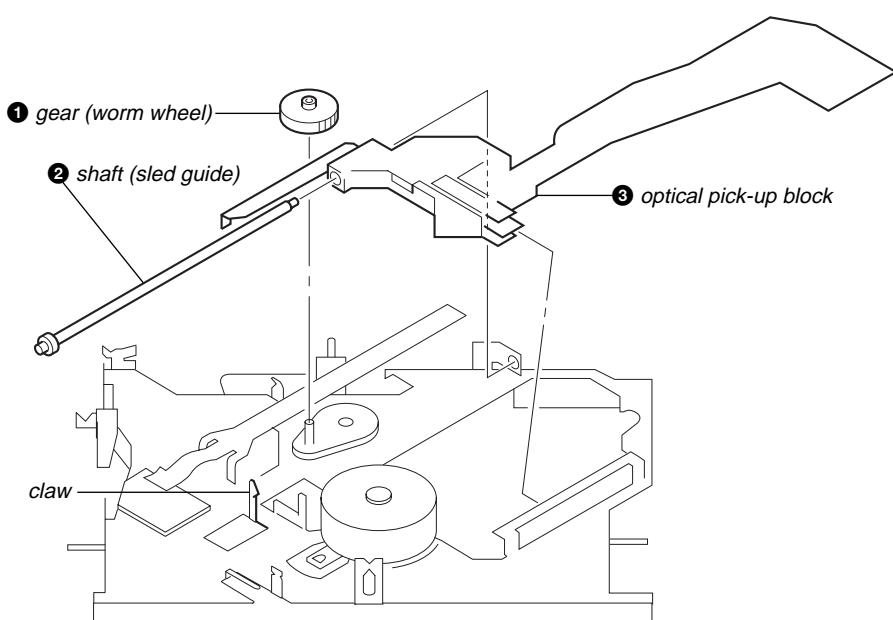

### SECTION 3 DIAGRAMS


#### 3-1. IC PIN DESCRIPTION

##### • IC600 μPD78005GC-133-8BT (SYSTEM CONTROL)

Pin No.	Pin Name	I/O	Pin Description
1	MCLK	O	Microcomputer command clock signal output (data latch on rising)
2	MDATA	O	Microcomputer command data signal output
3	MLD	O	Microcomputer command load signal output
4	AVSS	—	Analog ground
5	DSTSEL0	I	Destination select setting input (Connect to ground in this set.)
6	DSTSEL1	I	9k/10k select setting input ("L": 9 kHz step, "H": 10 kHz step)
7	AVREF1	I	Analog reference voltage input
8	SUBQ	I	Sub code Q data input
9	—	—	Not used.
10	SQCK	O	Clock output for sub code Q register.
11	LCDCE	O	LCD driver serial chip enable output
12	LCDSO	O	LCD driver serial data output
13	LCDCKO	O	LCD driver serial clock output
14	ILLON	O	Illumination power control output
15	UNICKI	I	SONY-BUS serial interface clock input
16	UNISI	I	SONY-BUS serial interface data input
17	UNISO	O	SONY-BUS serial interface data output
18	UNICKO	O	SONY-BUS serial interface clock output
19	SBCK	O	Clock output for error correction result read-in.
20	BUSON	O	BUS ON control output
21	SYS RST	O	System reset control output
22	RST	O	DSP reset signal output ("L" active)
23	FOUT	O	Loading motor control output (Forward direction)
24	ROUT	O	Loading motor control output (Reverse direction)
25	CD-ON	O	CD power control output
26	PW-ON	O	System power control output
27	LIMSW	I	LIMIT switch input ("L" active)
28	FLAG	I	Data input for error correction result read-in.
29	SENS	I	SENS signal input
30	FLOCK	I	Focus servo pulling signal input ("L" active)
31	TLOCK	I	Tracking servo pulling signal input ("L" active)
32	STATE	I	Status signal input
33	VSS1	—	Ground
34	VIB.	I/O	Vibration lens input/output
35	CDM-ON	O	CD mechanism power control output
36	AMPMUT	O	Power amplifier mute control output
37	A-MUT	O	Audio mute control output
38	AD-ON	O	Power control output for A/D conversion.
39	PW-SEL	O	Not used in this set.
40	NOSESW	I	Front panel attachment detection input
41	TEST	I	Test mode direct setting input
42	TELMUT	O	Not used in this set.
43	ACCIN	I	Accessory power supply voltage detection input
44	VOLCE	O	Electric volume serial chip enable output
45	VOLSO	O	Electric volume serial data output
46	BEEP	O	Beep output
47	TUNON	O	Tuner ON output
48	FMON	O	FM ON output
49	PLLCE	O	PLL chip enable output
50	VOLCKO	O	Electric volume serial clock output
51	PLLSO	O	PLL data output


Pin No.	Pin Name	I/O	Pin Description
52	PLLCKO	O	PLL clock output
53	PLLSI	I	PLL data input
54	AMON	O	AM ON output
55	—	—	Not used in this set.
56	FMST	I/O	ST-IND indication input/Forced Monaural output
57	SW4	I	Switch 4 input ("L" active)
58	SW3	I	Switch 3 input ("L" active)
59	SW1	I	Switch 1 input ("L" active)
60	RESET	I	System reset input
61	SIRCS	I	Remote commander input
62	KEYACK	I	Key input acknowledge
63	BUIN	I	Backup power supply detection input
64	BLKCK	I	Sub code block clock signal input (interruption)
65	SW2	I	Switch 2 input ("L" active)
66	FCLK	I	Latch input for error correction result read-in. (interruption)
67	VSS0	—	Ground
68	VDD1	—	Power supply pin (+5 V)
69	X2	—	Main system clock output (5 MHz)
70	X1	—	Main system clock input (5 MHz)
71	VPP	—	Internal connection
72	XT2	—	Sub system clock output (32.768 kHz)
73	XT1	—	Sub system clock input (32.768 kHz)
74	VDD0	—	Power supply pin (+5 V)
75	AVREF0	—	Analog reference voltage input
76	KEYIN0	I	Key input 0
77	KEYIN1	I	Key input 1
78	S-METER	I	AM/FM S-meter voltage detection input
79	SD-IN	I	Signal detector input
80	LCDINH	O	LCD blank indication control output

## 3-2. BLOCK DIAGRAM — MAIN SECTION —

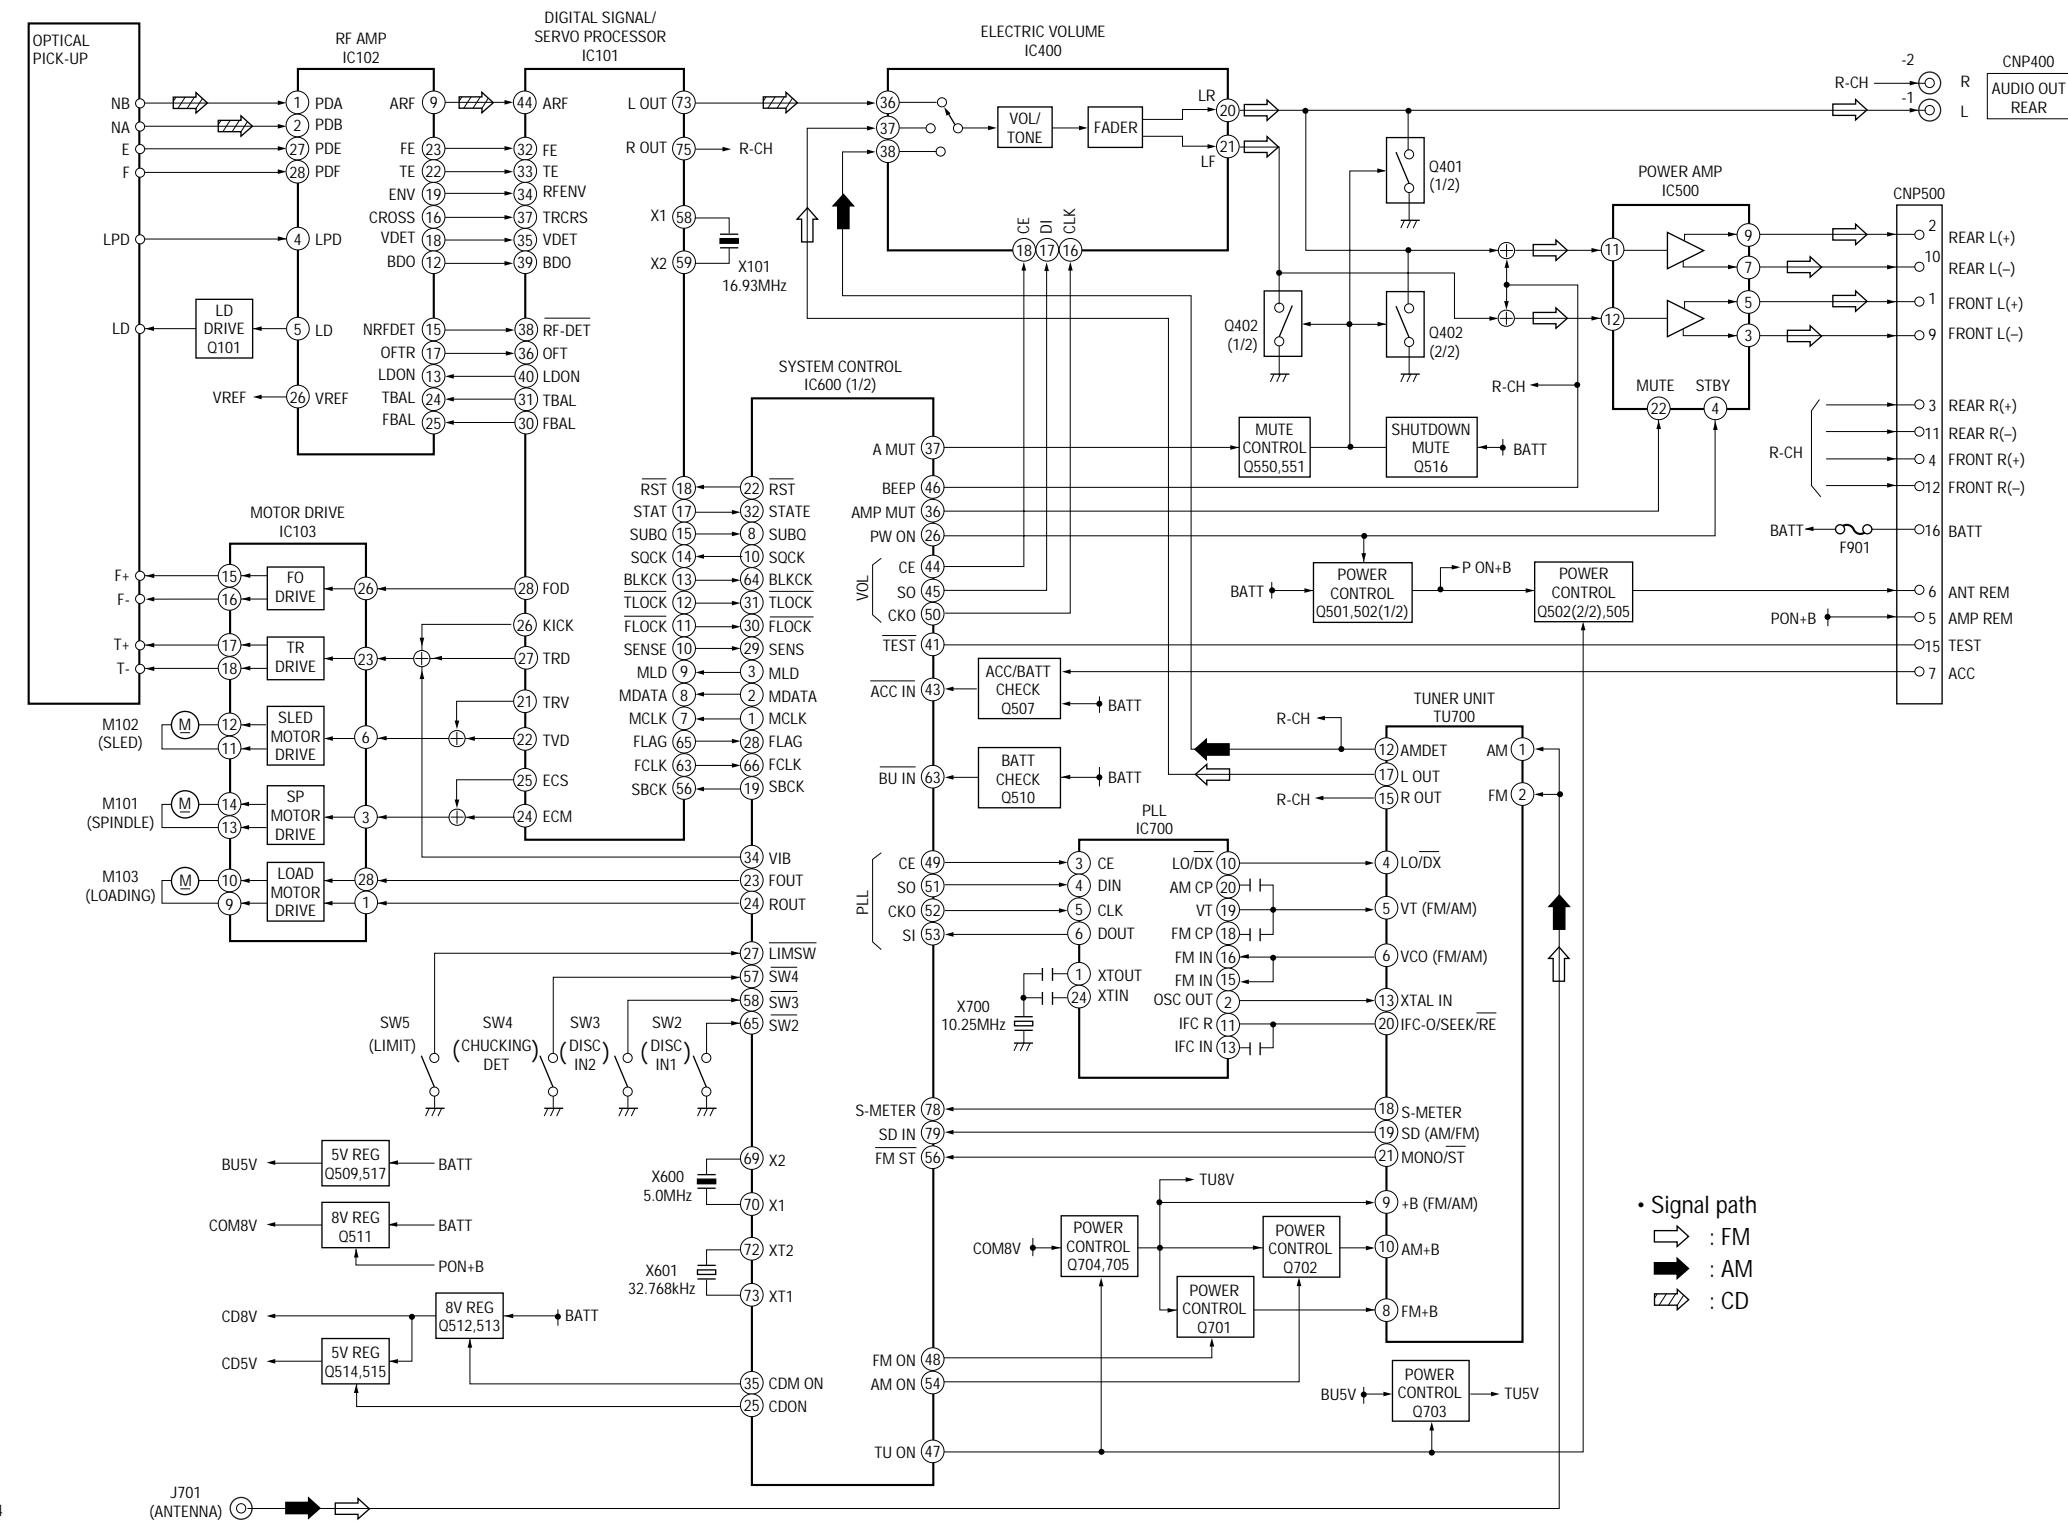

## 3-3. BLOCK DIAGRAM — DISPLAY SECTION —

04

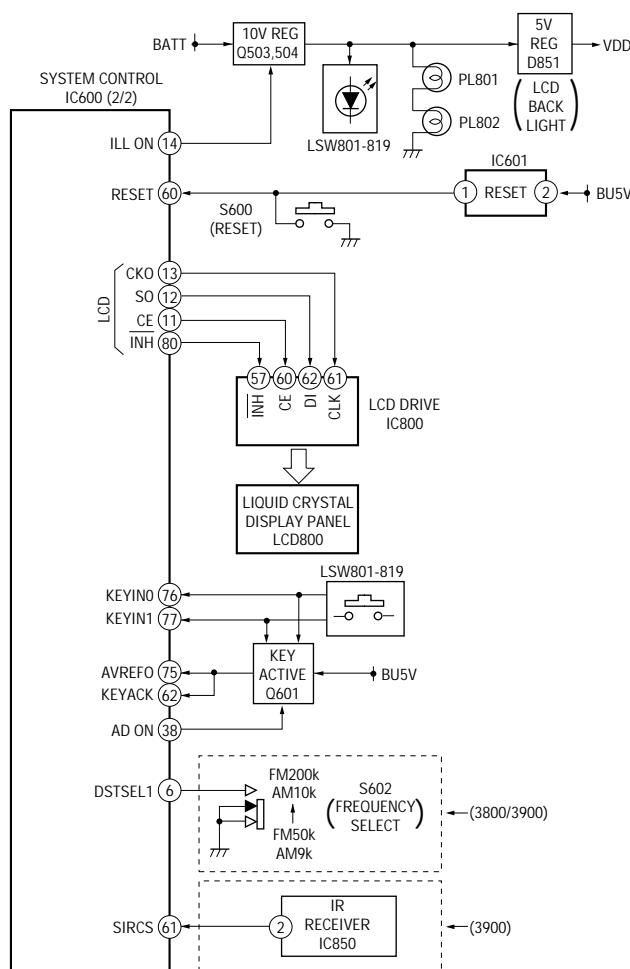

**THIS NOTE IS COMMON FOR PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS.**  
(In addition to this, the necessary note is printed in each block.)

**For schematic diagrams**

- All capacitors are in  $\mu\text{F}$  unless otherwise noted.  $\text{pF}$ :  $\mu\text{F}$  50 WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in  $\Omega$  and  $1/4\text{W}$  or less unless otherwise specified.
- % : indicates tolerance.
- $\Delta$  : internal component.
- : panel designation.

The components identified by mark  $\Delta$  or dotted line with mark  $\Delta$  are critical for safety.  
Replace only with part number specified.

Les composants identifiés par une marque  $\Delta$  sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

- B+** : B+ Line.
- Power voltage is dc 14.4V and fed with regulated dc power supply from ACC and BATT cords.
- Voltages are taken with a VOM (Input impedance  $10\text{ M}\Omega$ ). Voltage variations may be noted due to normal production tolerances.
- Waveforms are taken with a oscilloscope. Voltage variations may be noted due to normal production tolerances.
- Circled numbers refer to waveforms.
- Signal path.
  - FM
  - AM
  - CD

**For printed wiring boards**


- : parts extracted from the component side.
- : parts extracted from the conductor side.
- : Through hole.
- $\Delta$  : internal component.
- : Pattern from the side which enables seeing.  
(The other layer's patterns are not indicated.)


**Caution:**  
Pattern face side: Parts on the pattern face side seen from the (Side B) pattern face are indicated.  
Parts face side: Parts on the parts face side seen from the (Side A) parts face are indicated.

## 3-4. PRINTED WIRING BOARDS — MAIN SECTION —


## • Semiconductor Location

Ref. No.	Location
(D501)	B-6
D502	F-11
D503	B-13
D504	B-12
D505	B-11
D506	D-13
D507	D-13
D508	E-11
D509	F-11
D510	E-12
D511	B-4
D512	E-10
D513	B-8
D514	D-8
D516	B-12
D517	B-12
D518	D-13
D519	C-3
D520	D-9
D521	D-9
D522	D-9
D523	D-9
D524	C-9
D525	C-9
D526	C-9
D527	C-9
D550	C-4
D551	C-4
D601	K-12
D602	J-12
D603	K-12
D605	K-11
D606	K-11
D607	J-11
D608	J-11
D610	K-10
D611	K-10
IC101	G-8
IC102	H-5
IC103	J-4
IC400	D-5
(IC500)	B-6
IC600	H-11
IC601	I-9
IC700	E-3
Q101	F-4
Q401	B-3
Q402	C-5
Q403	C-6
Q501	D-10
Q502	D-12
Q503	F-13
Q504	G-12
Q505	D-11
Q507	D-12
Q509	E-11
Q510	E-12
Q511	E-10
Q512	C-8
(Q513)	B-7
Q514	C-8
Q515	D-7
Q516	B-3
Q517	F-11
Q550	B-3
Q551	B-4
Q601	J-12
Q701	G-2
Q702	G-2
Q703	J-7
Q704	F-2
Q705	F-3

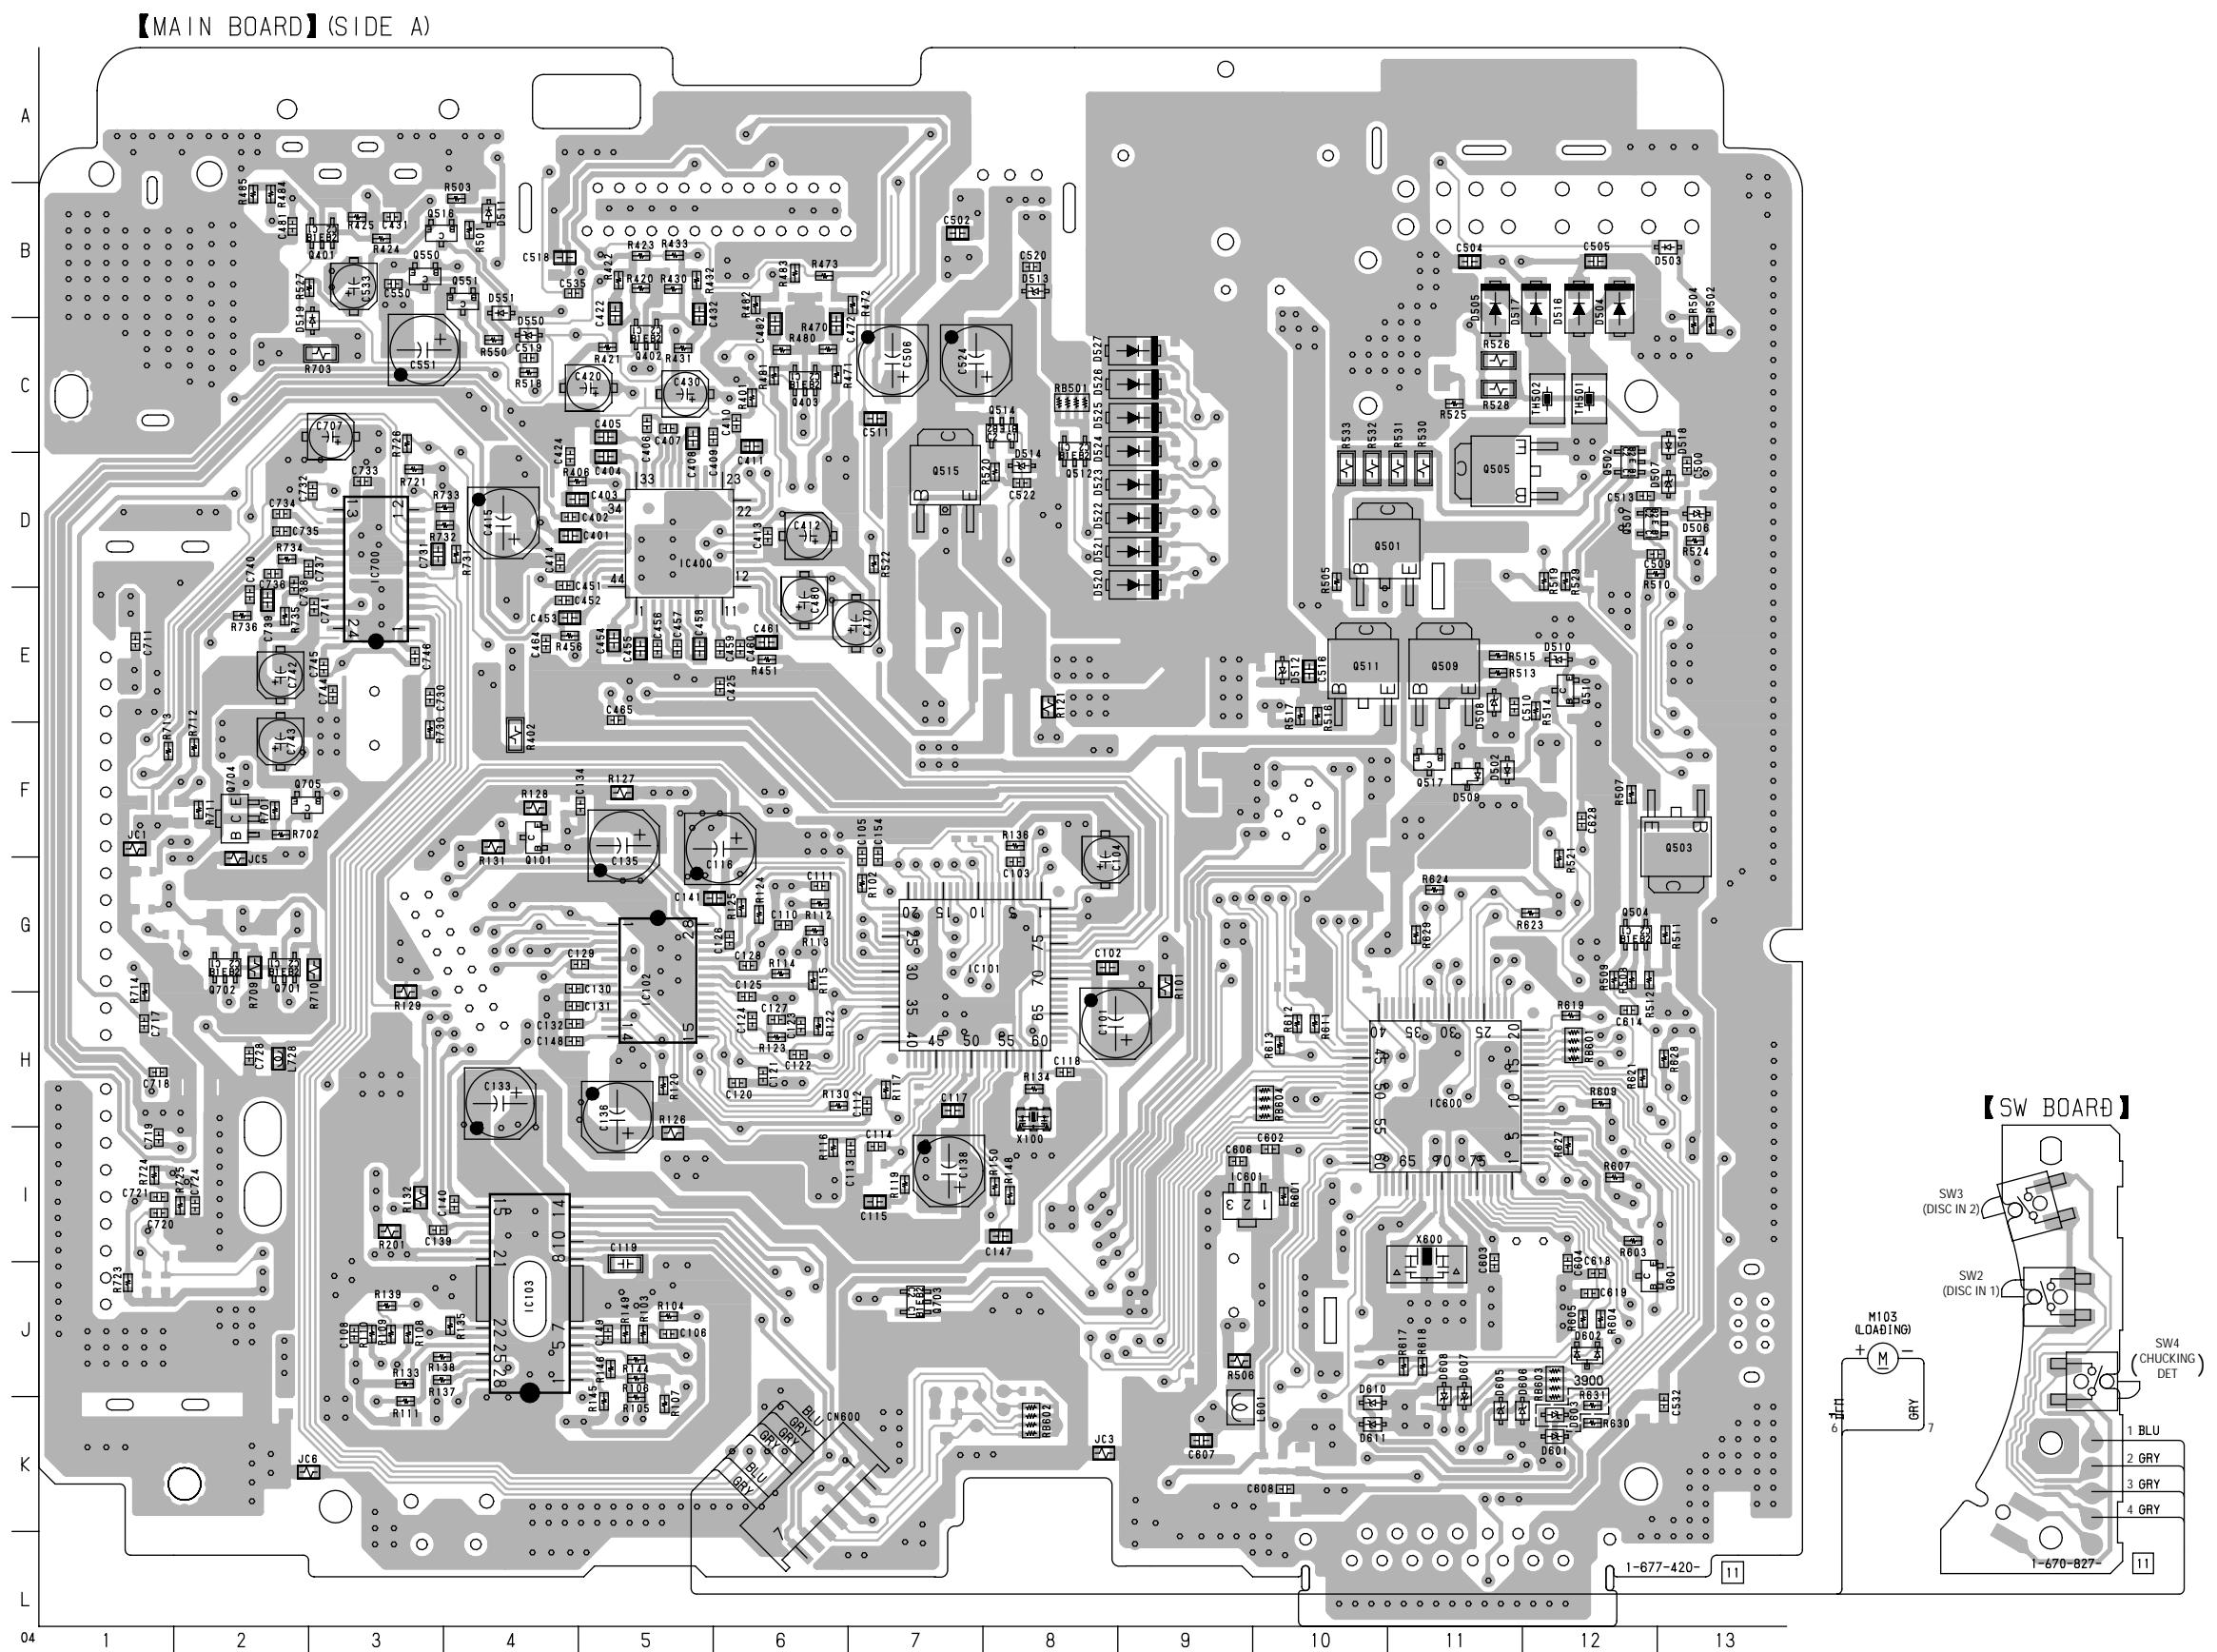


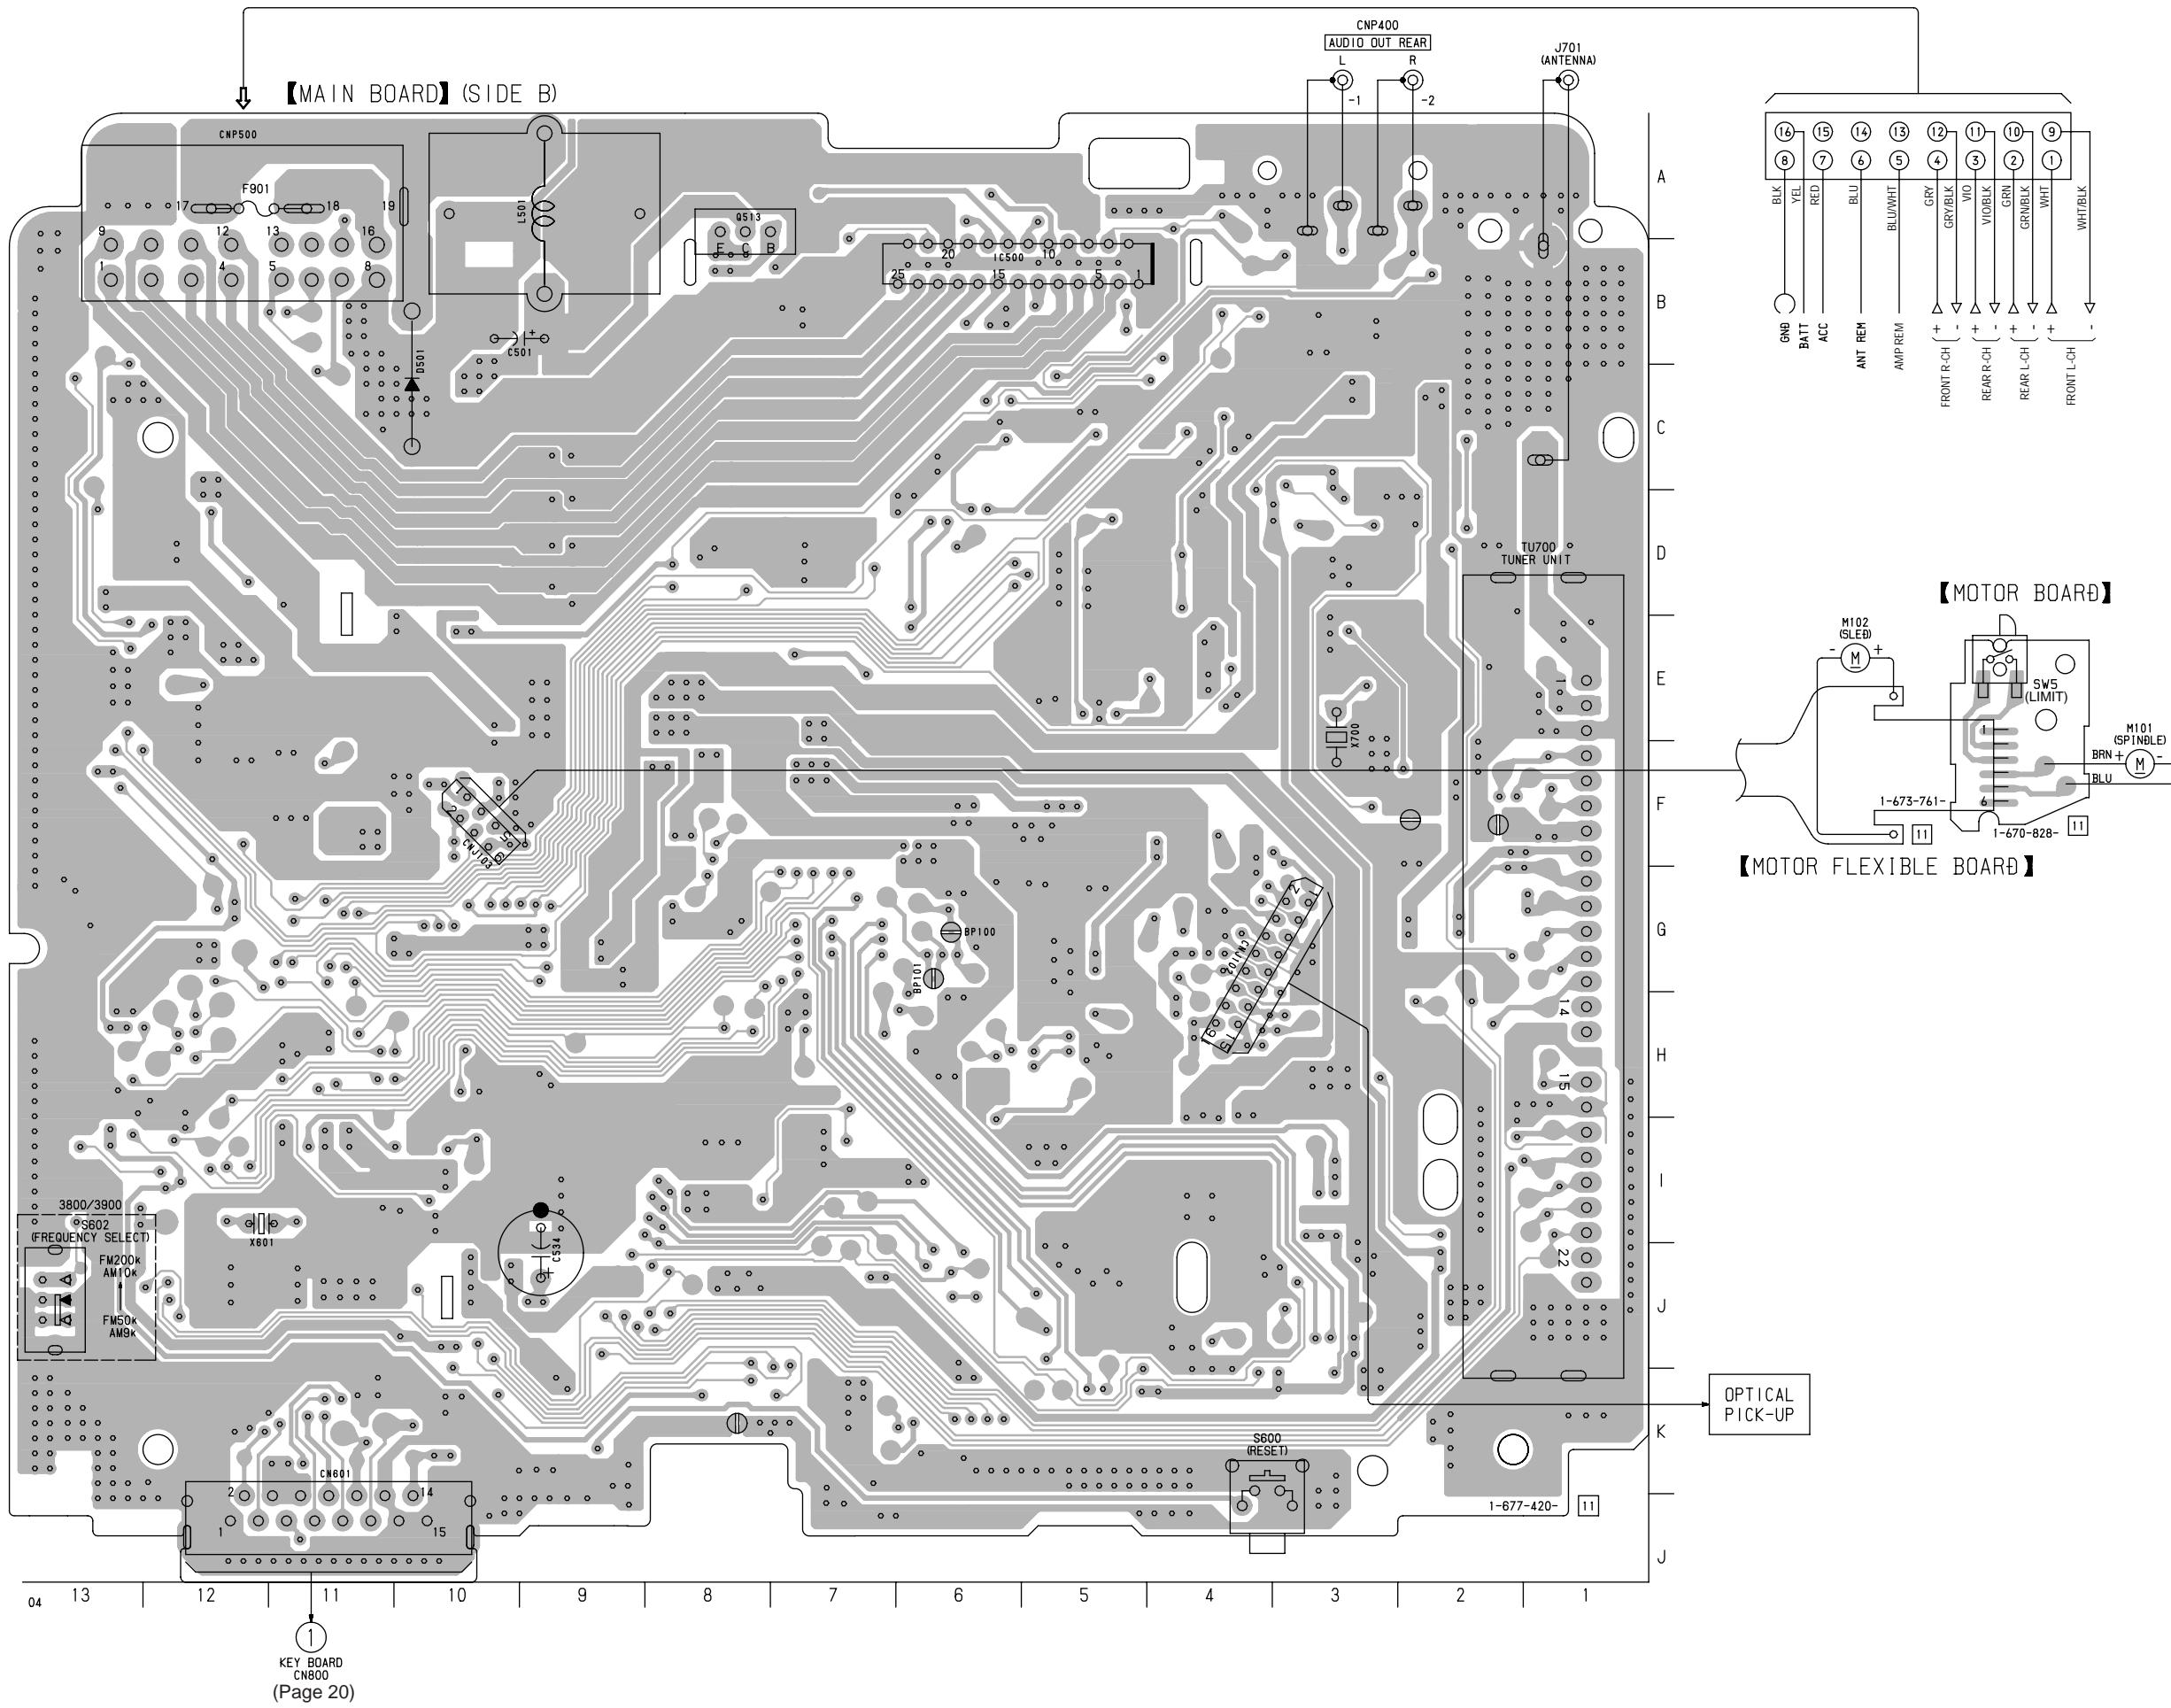

## 3-5. SCHEMATIC DIAGRAM — MAIN SECTION (1/3) — • Refer to page 21 for IC Block Diagrams.

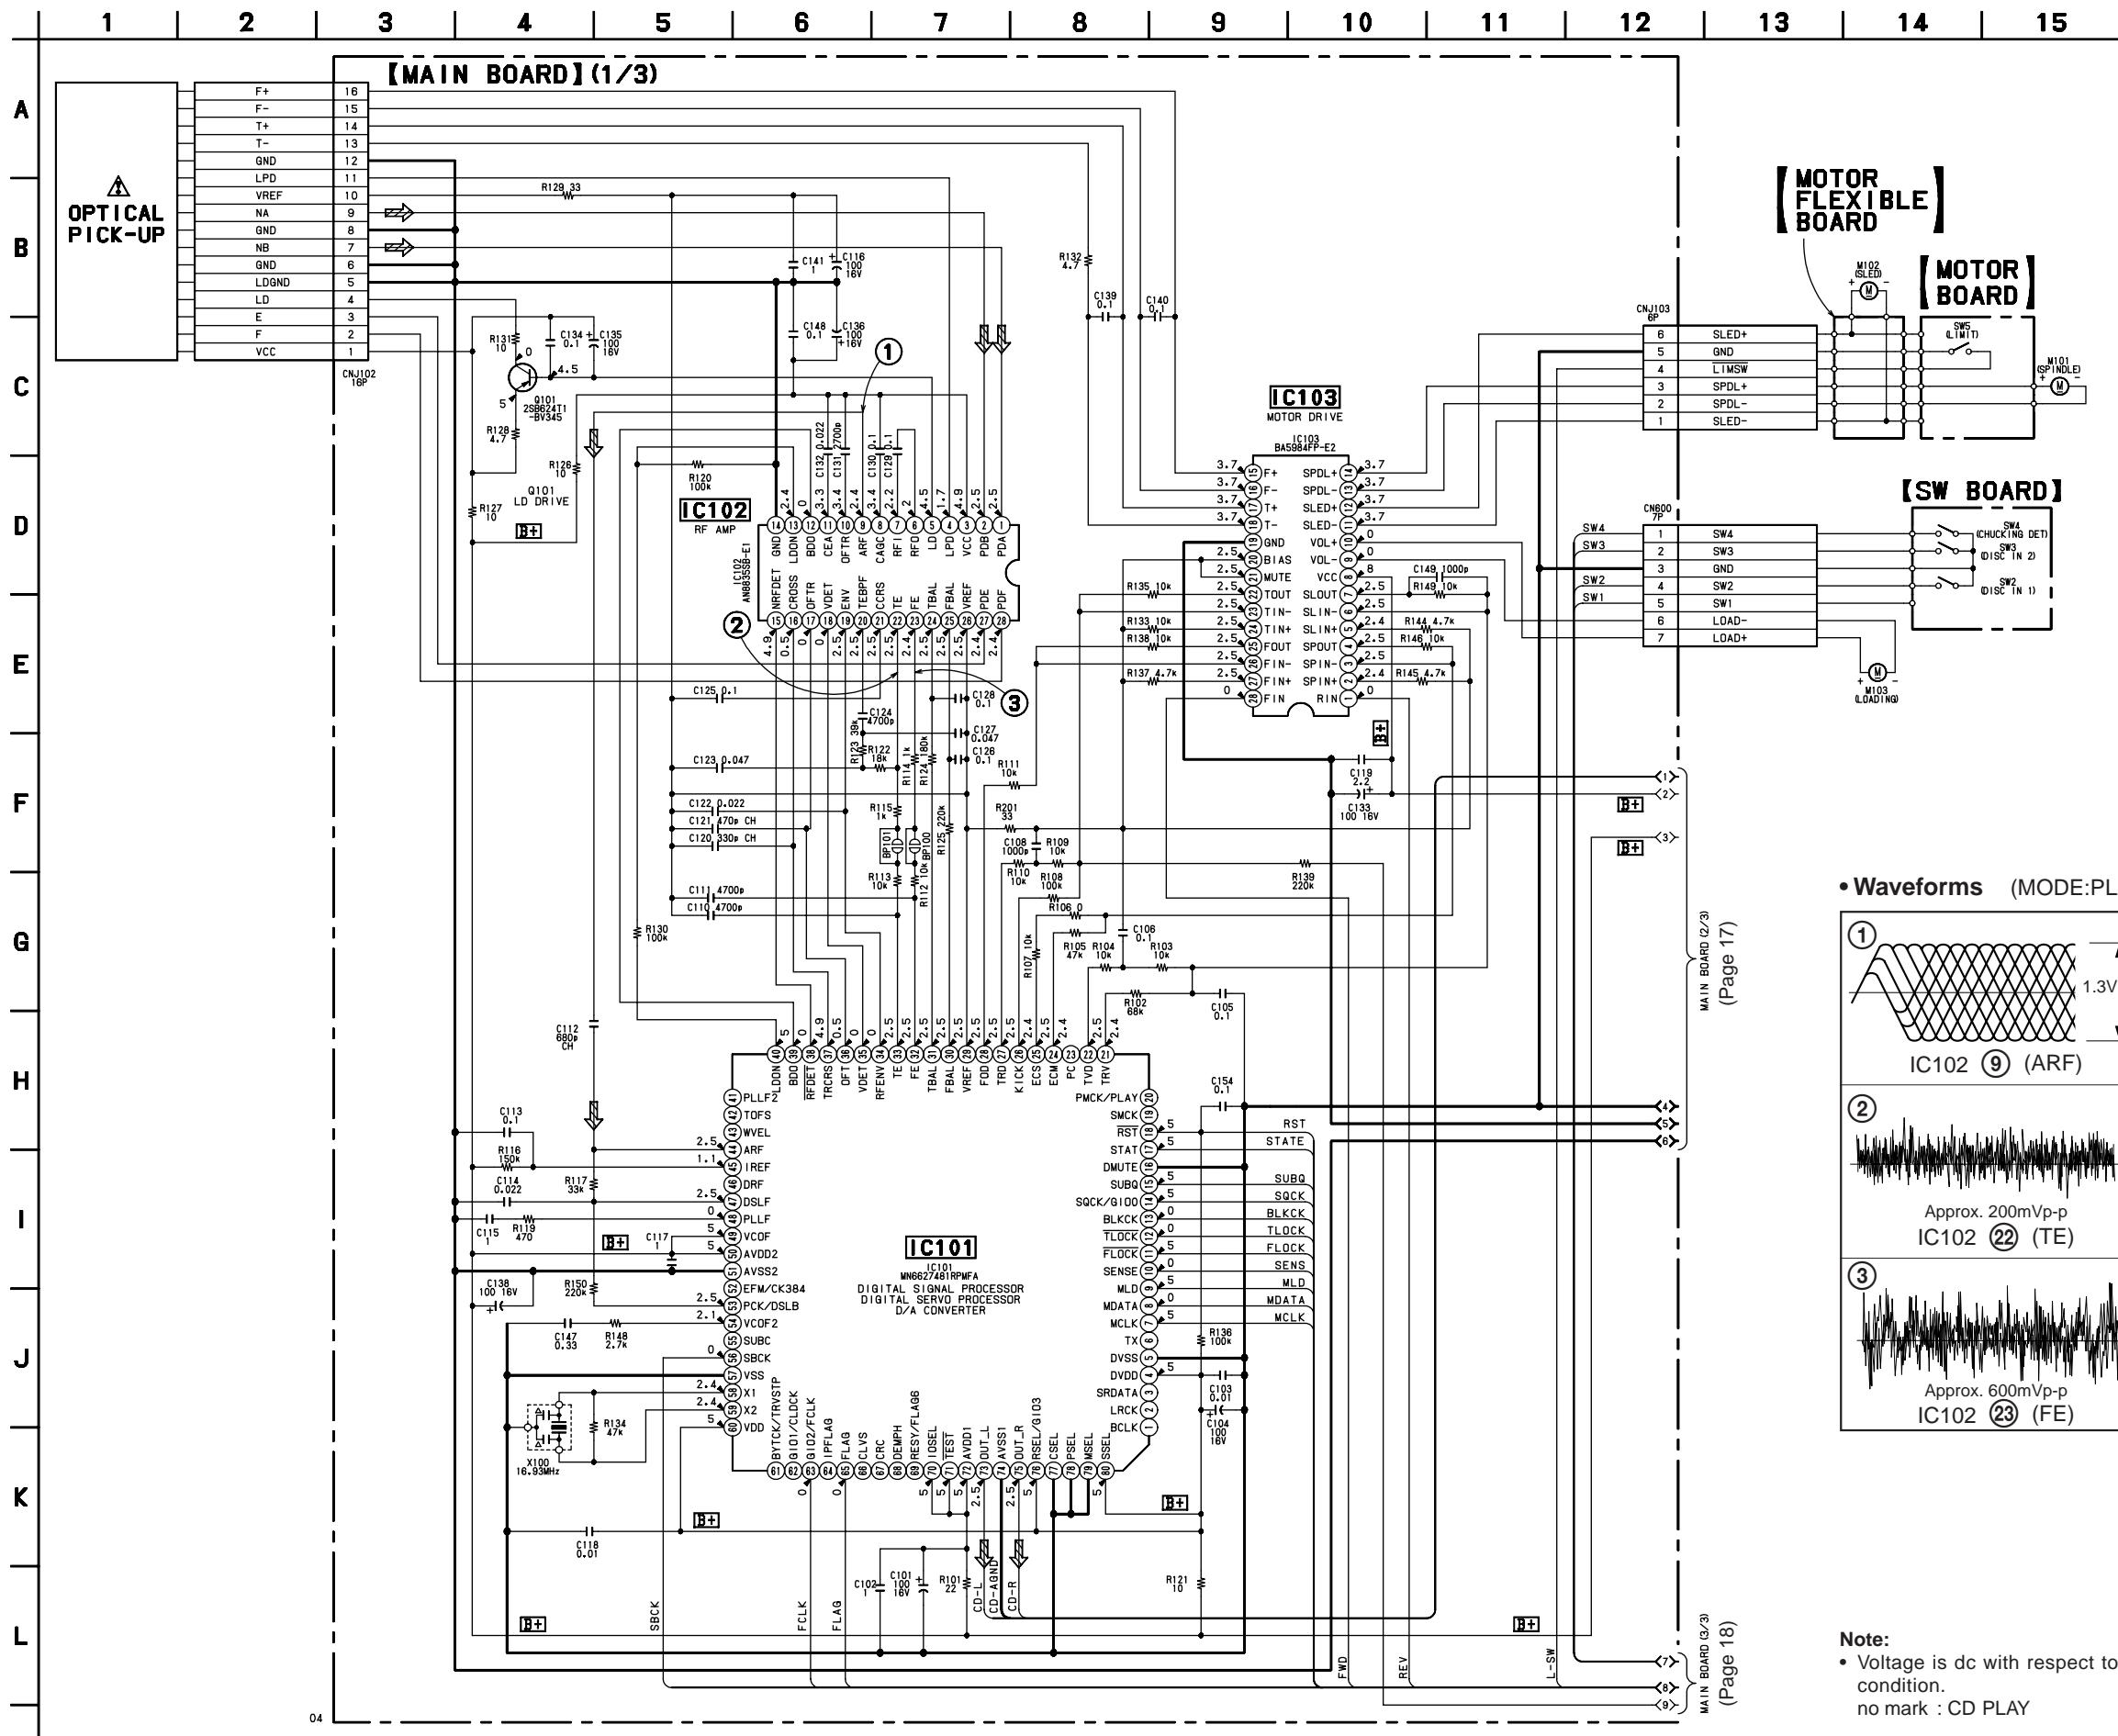


**3-6. SCHEMATIC DIAGRAM — MAIN SECTION (2/3) —** • Refer to page 22 for IC Block Diagrams

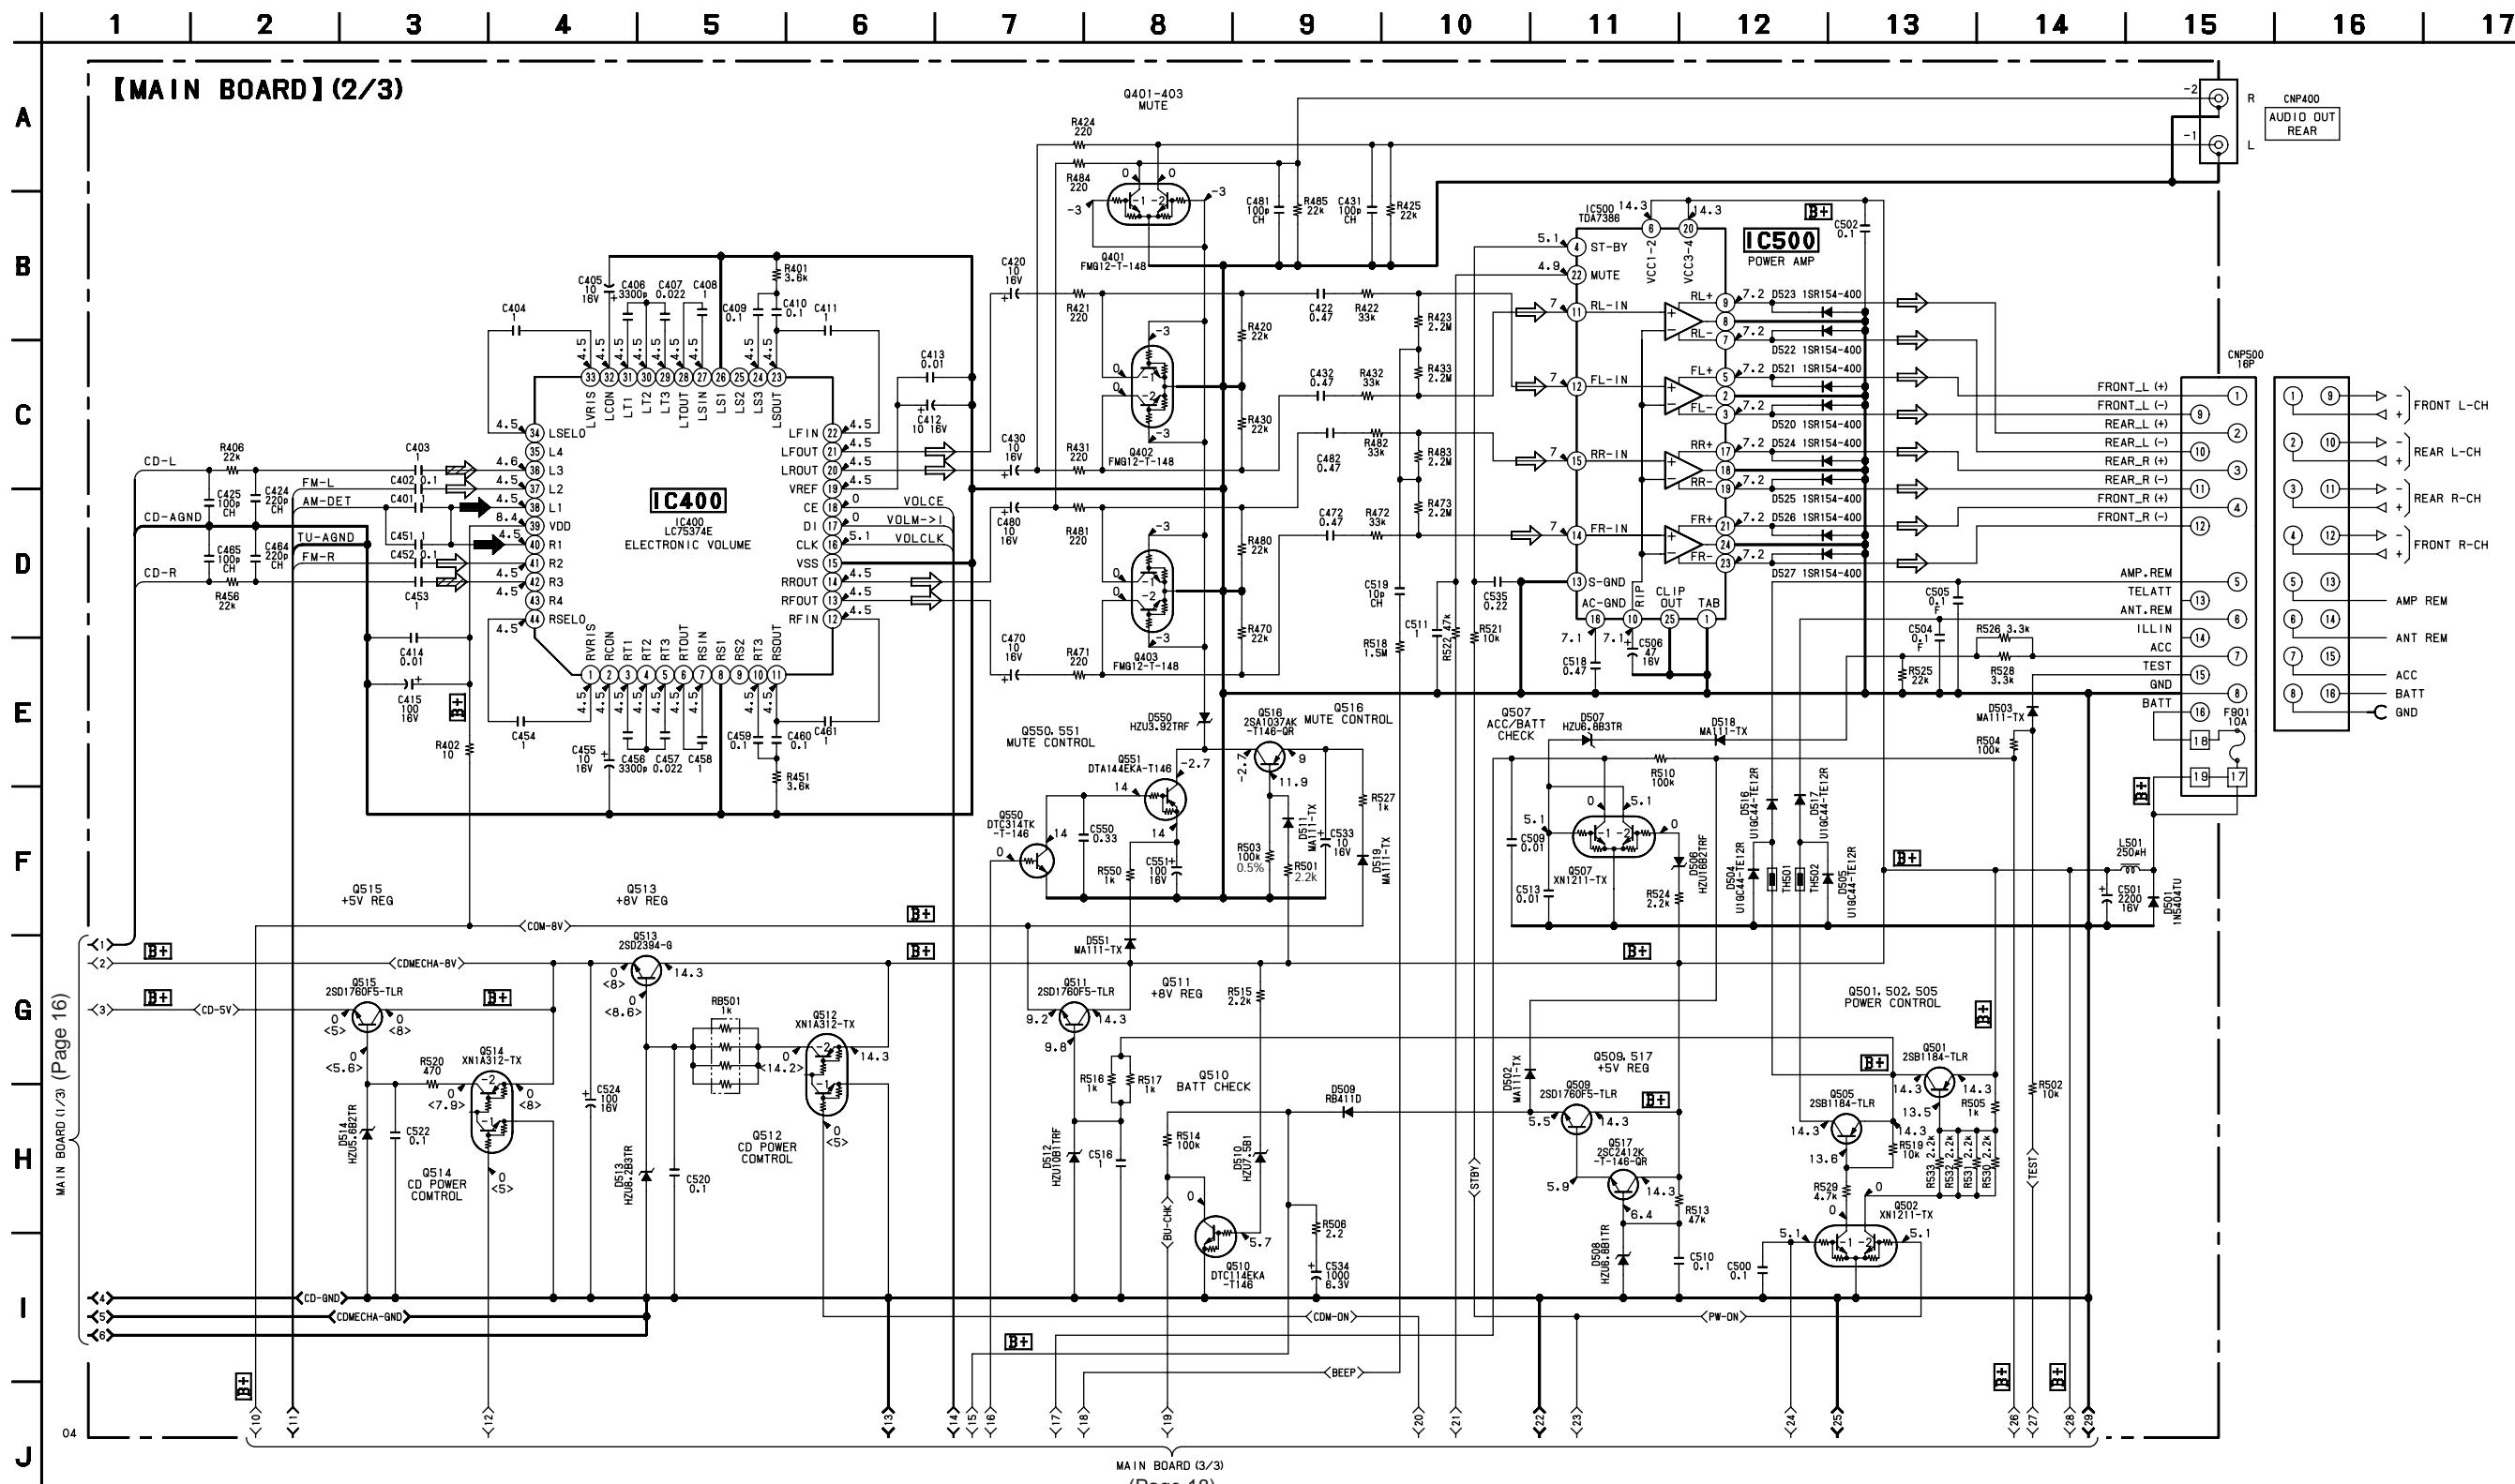

### Note:

- Voltage is dc with respect to ground under no-signal (detuned) condition.  
no mark : FM


## 3-7. SCHEMATIC DIAGRAM — MAIN SECTION (3/3) • Refer to page 22 for IC Block Diagrams.

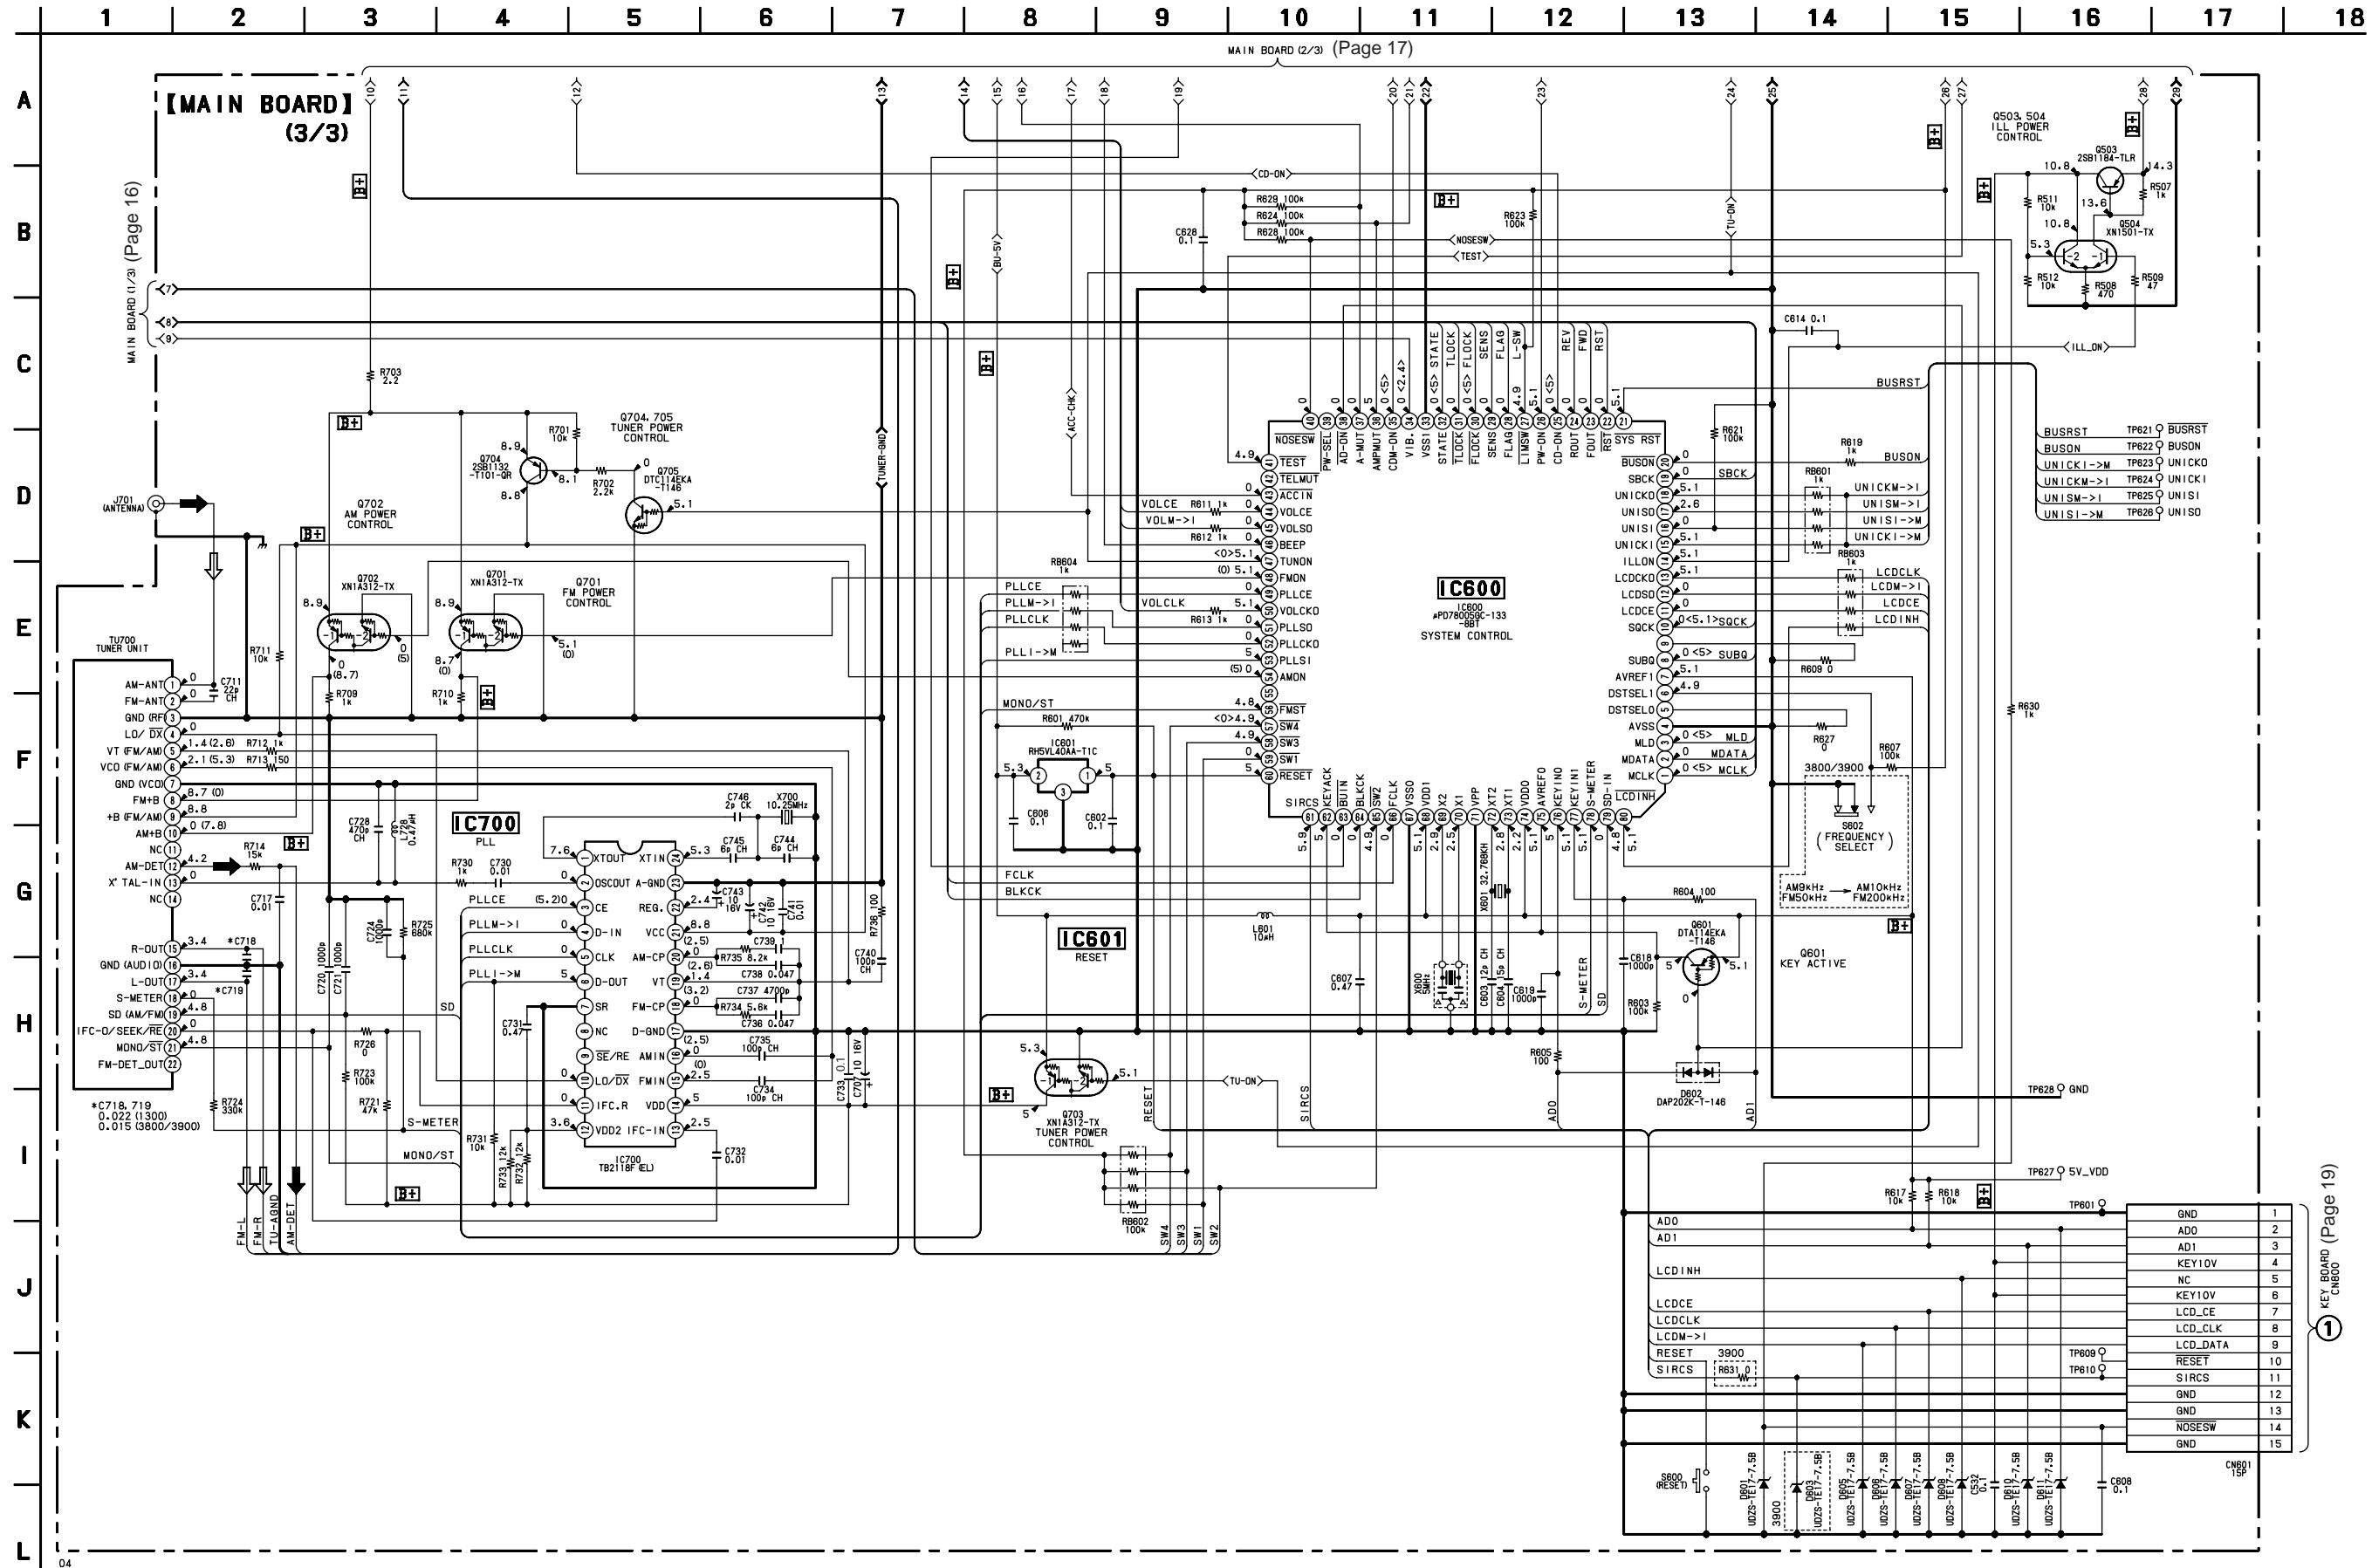

## Note:

- Voltage is dc with respect to ground under no-signal (detuned) condition.
- no mark : FM
- ( ) : AM
- ^ : CD PLAY

## 3-8. SCHEMATIC DIAGRAM — DISPLAY SECTION —

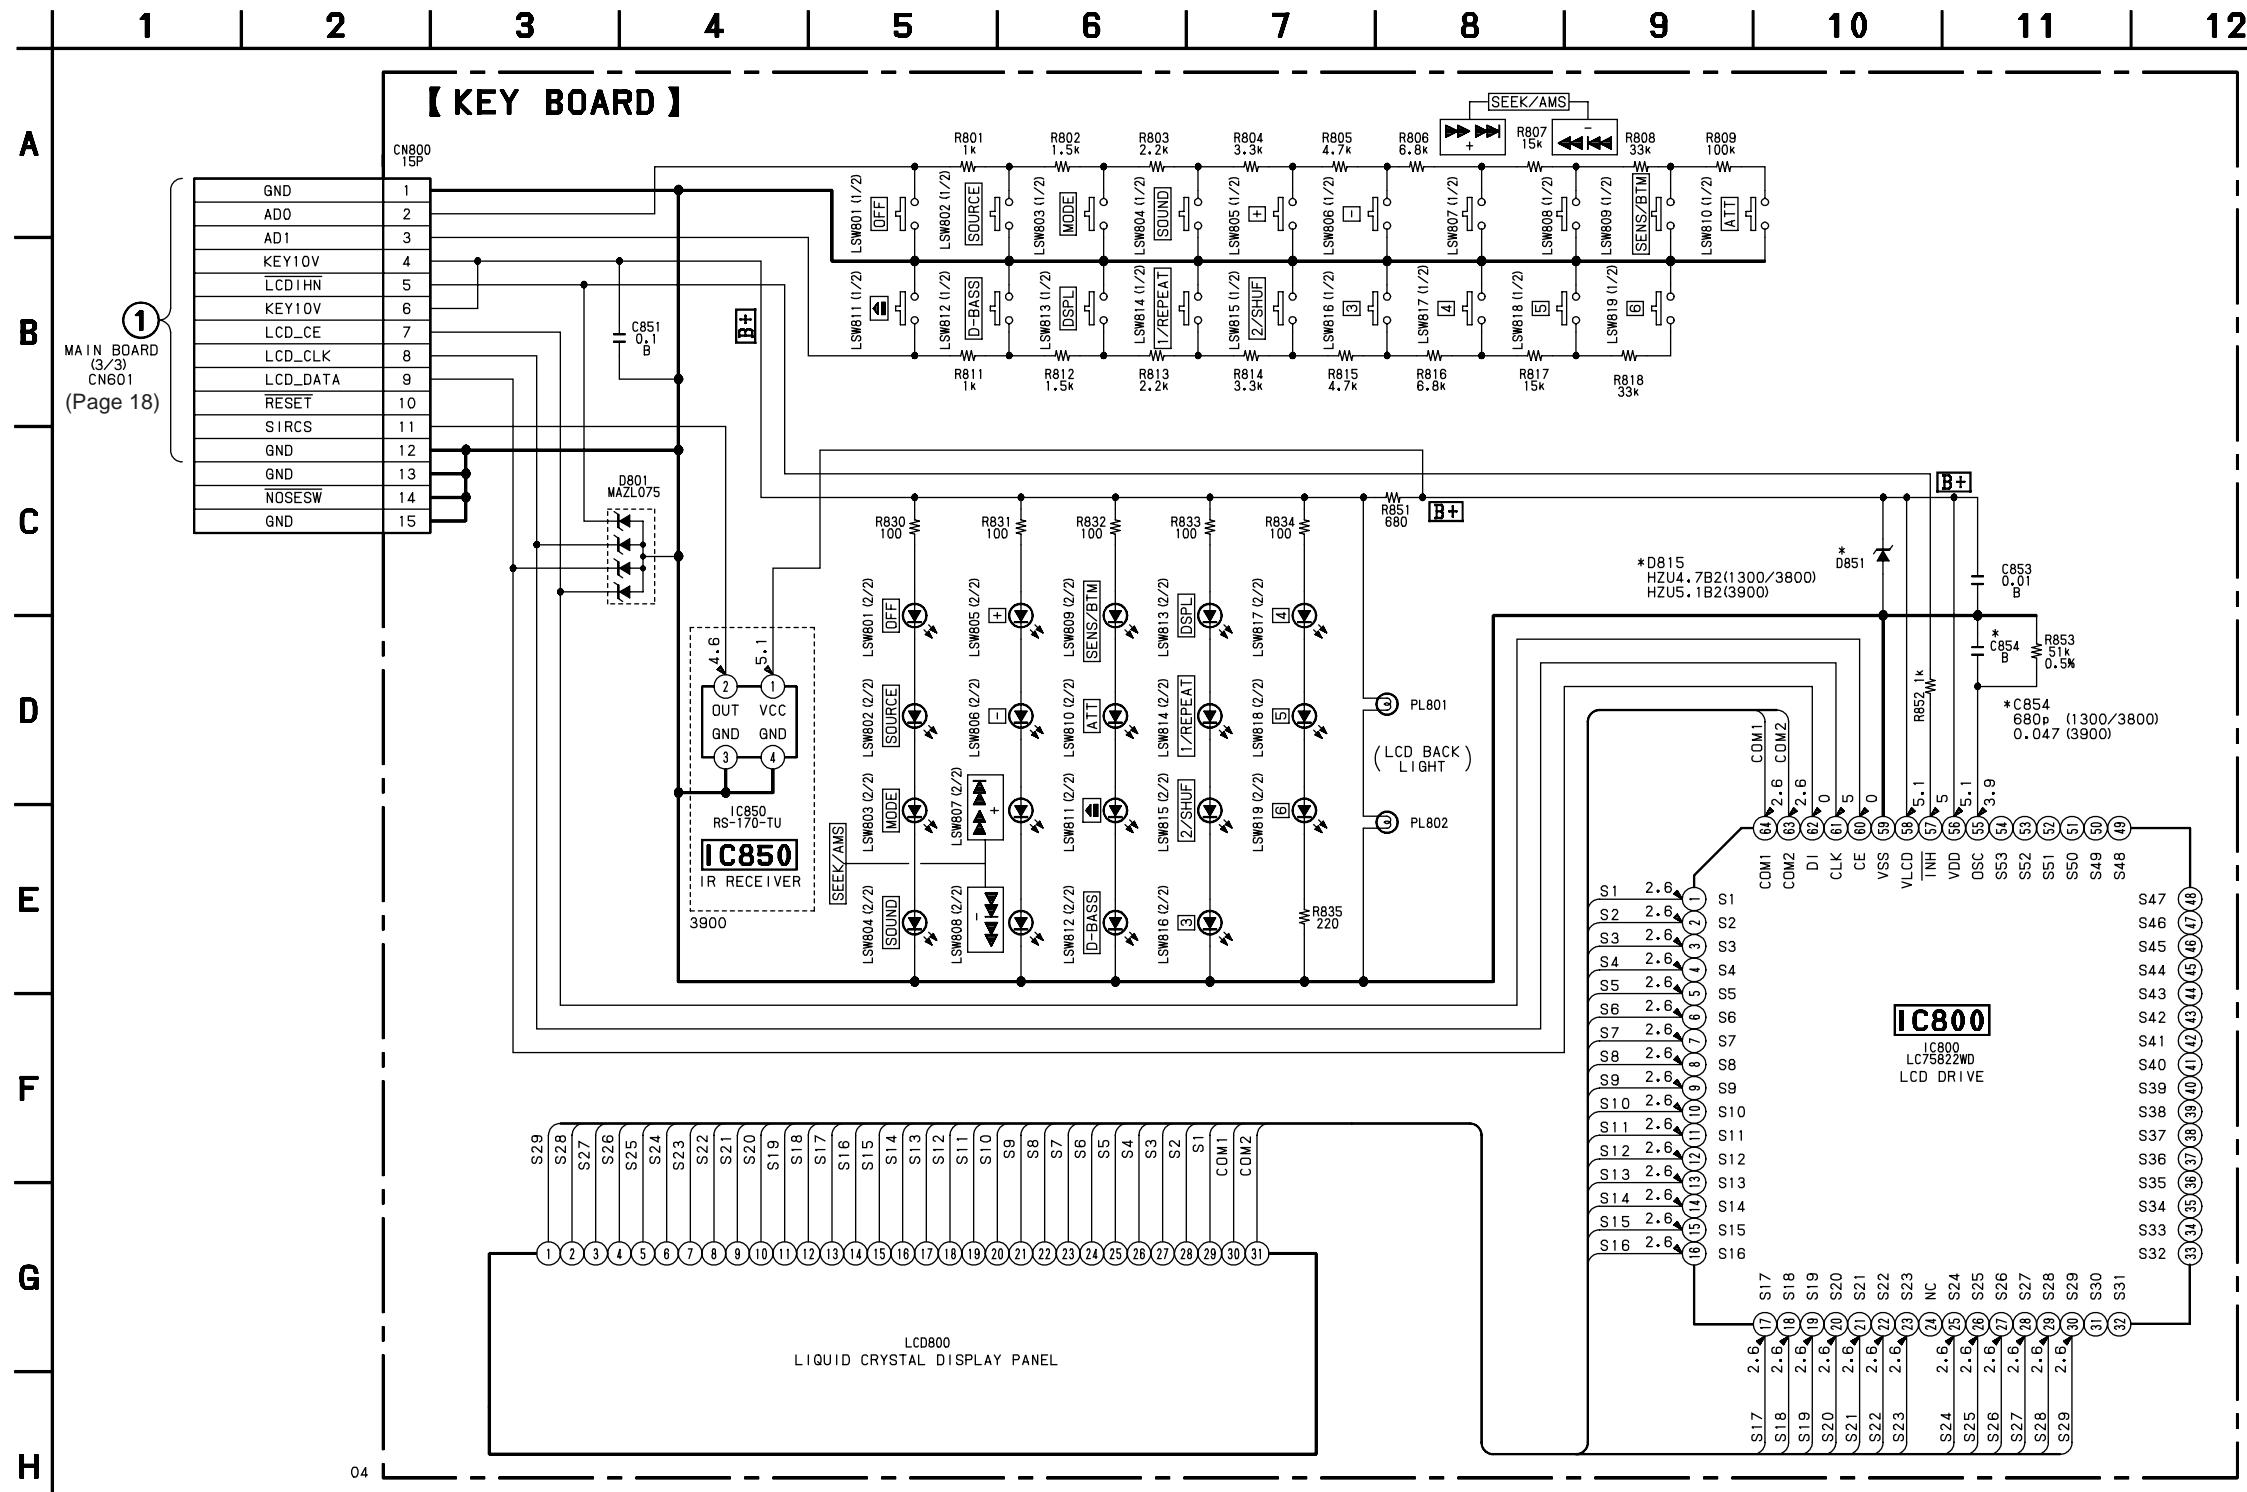


## Note:


- Voltage is dc with respect to ground under no-signal (detuned) condition.
- no mark : FM

## 3-9. PRINTED WIRING BOARD — DISPLAY SECTION —

【KEY BOARD】(SIDE A)

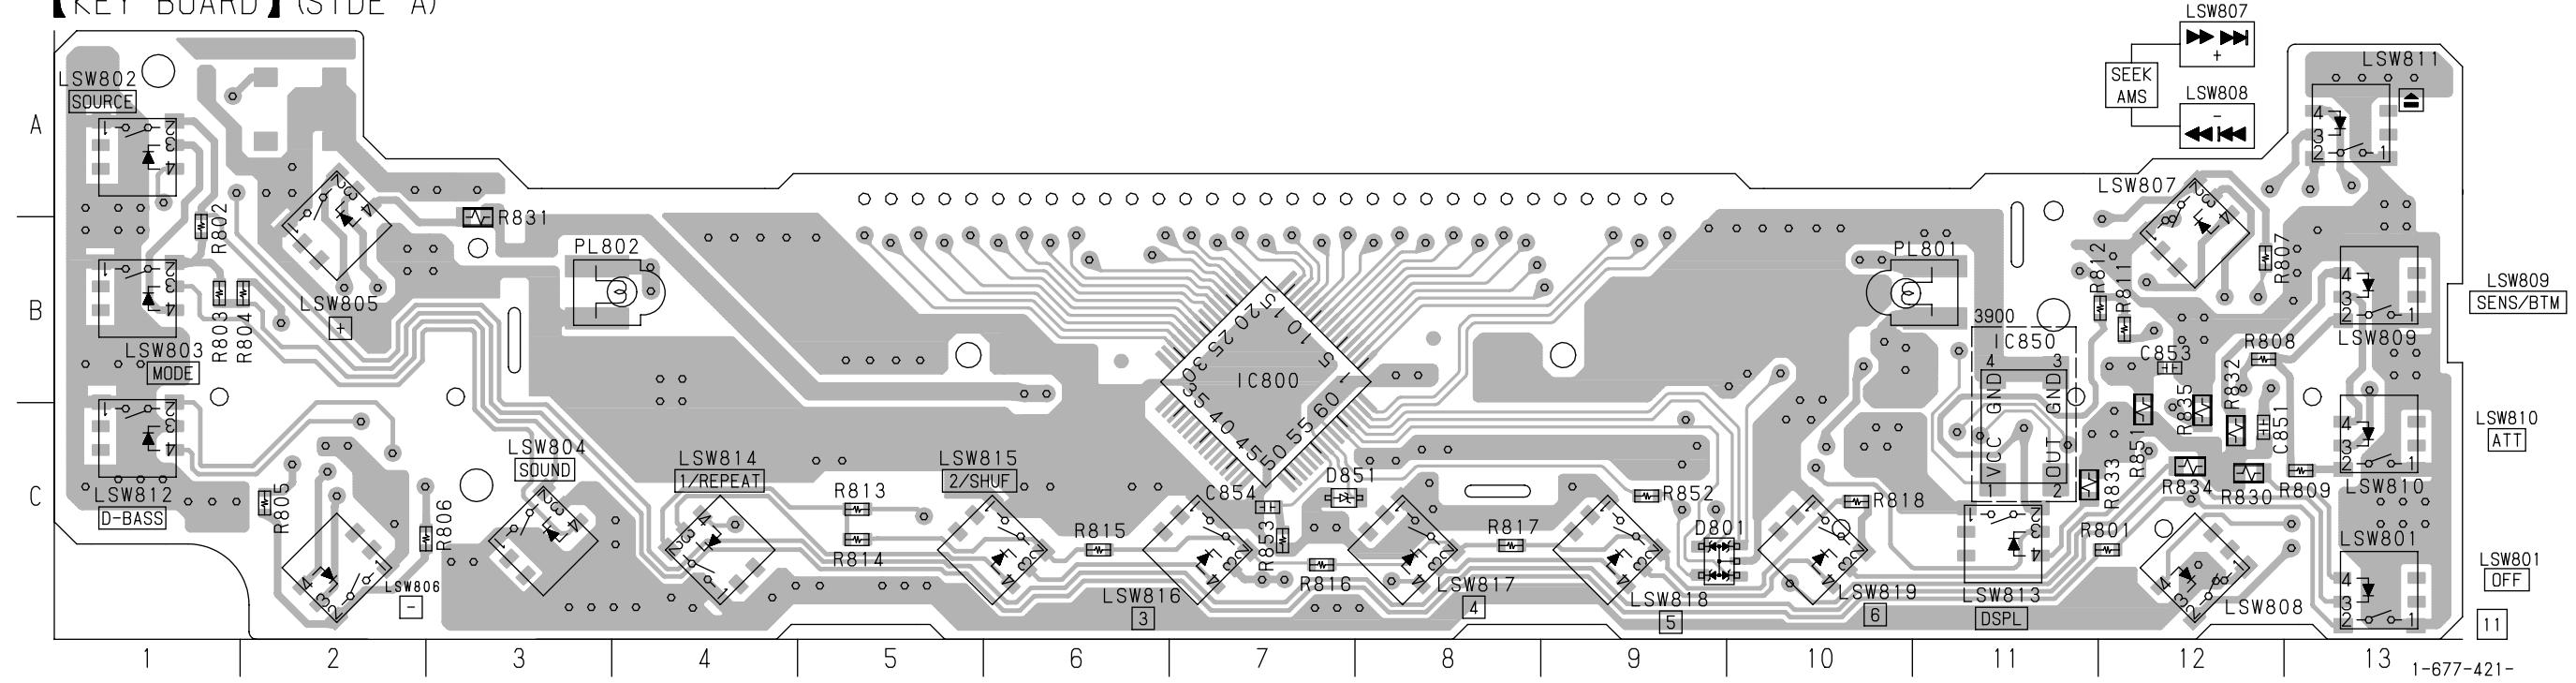


【KEY BOARD】(SIDE B)

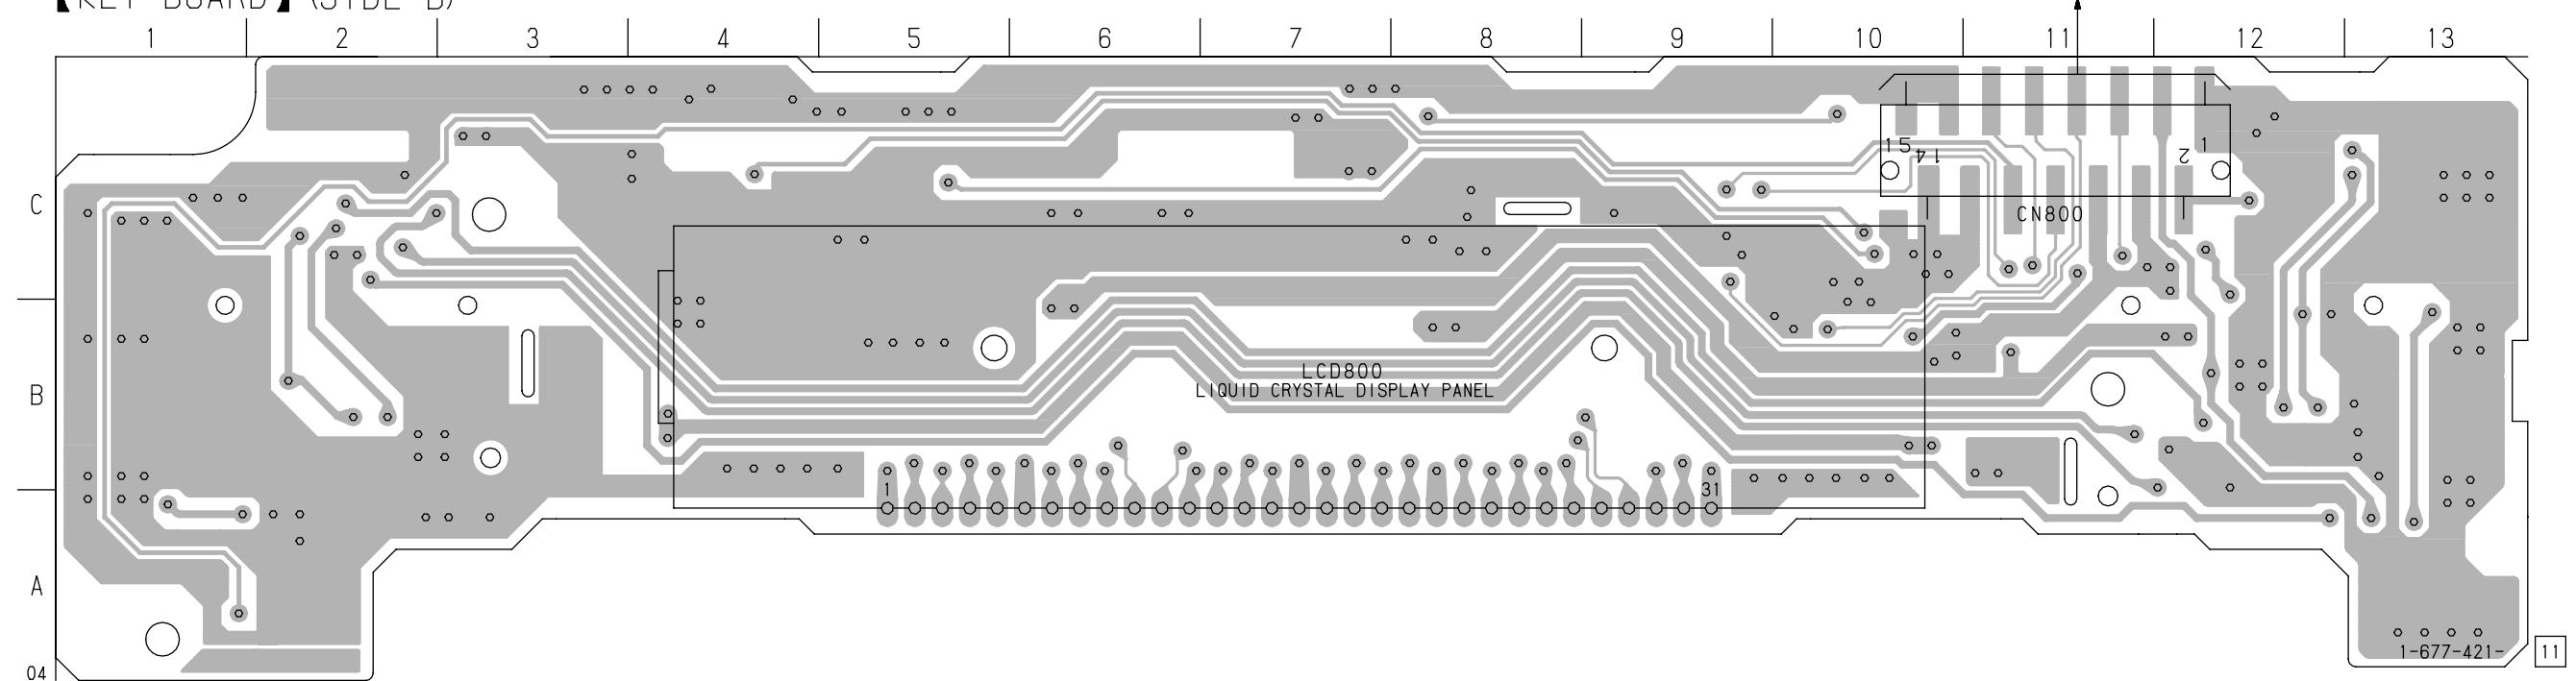


• IC Block Diagrams


**IC102 AN8835SB-E1**

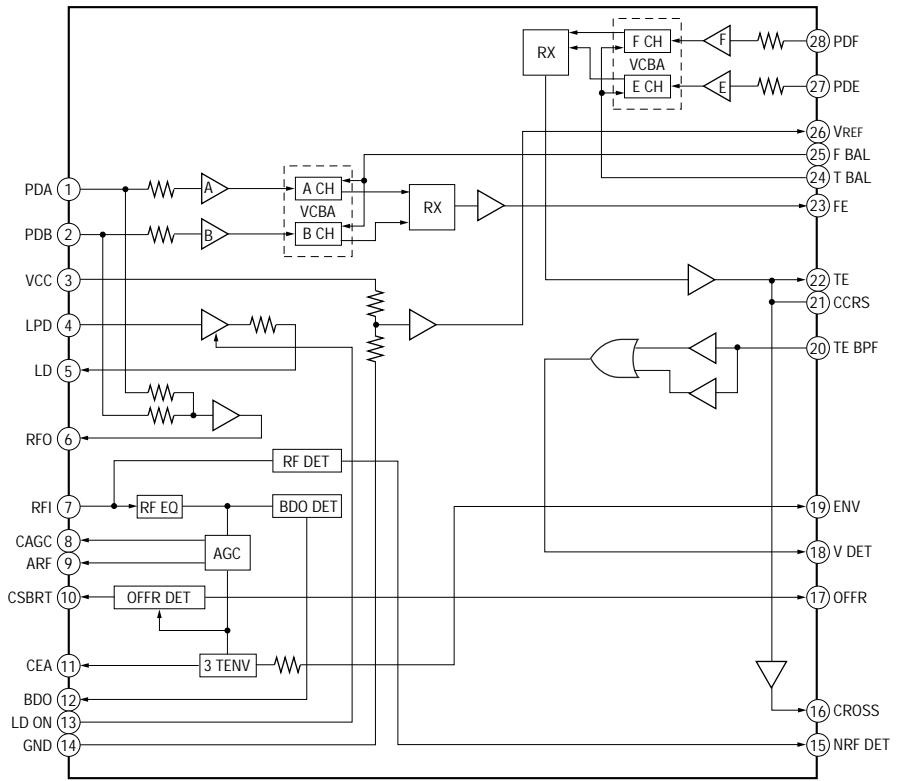


**IC103 BA5984FP-E2**

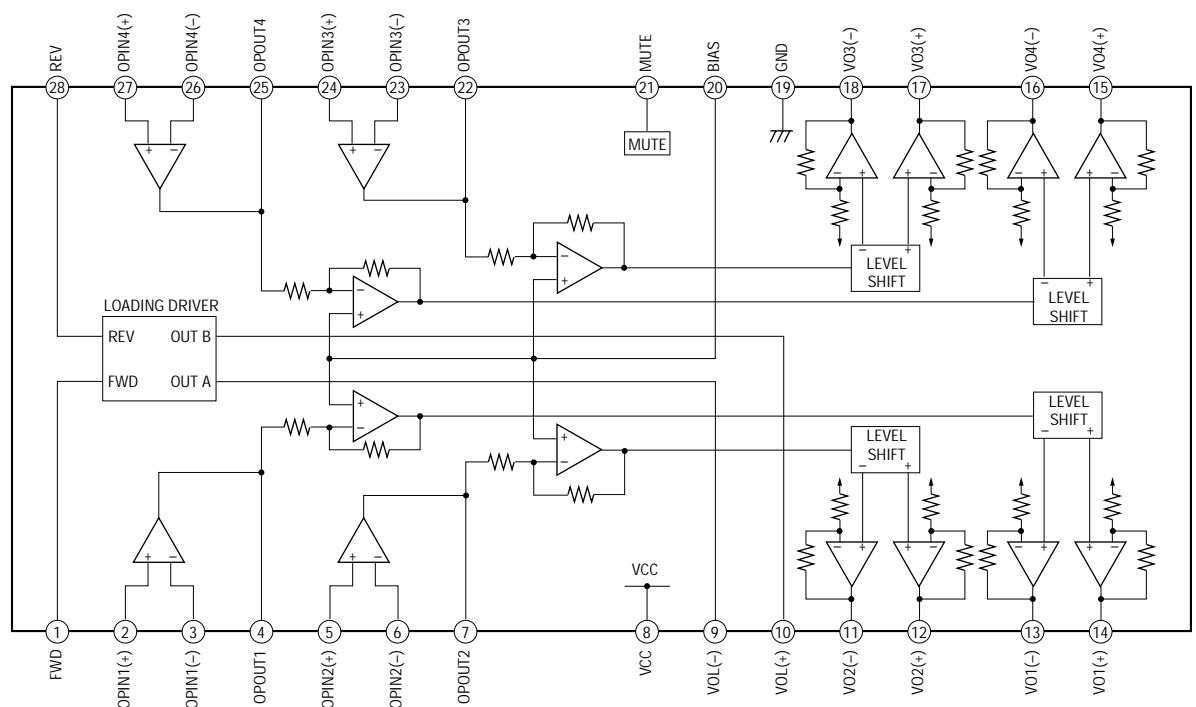

**IC400 LC75374E**

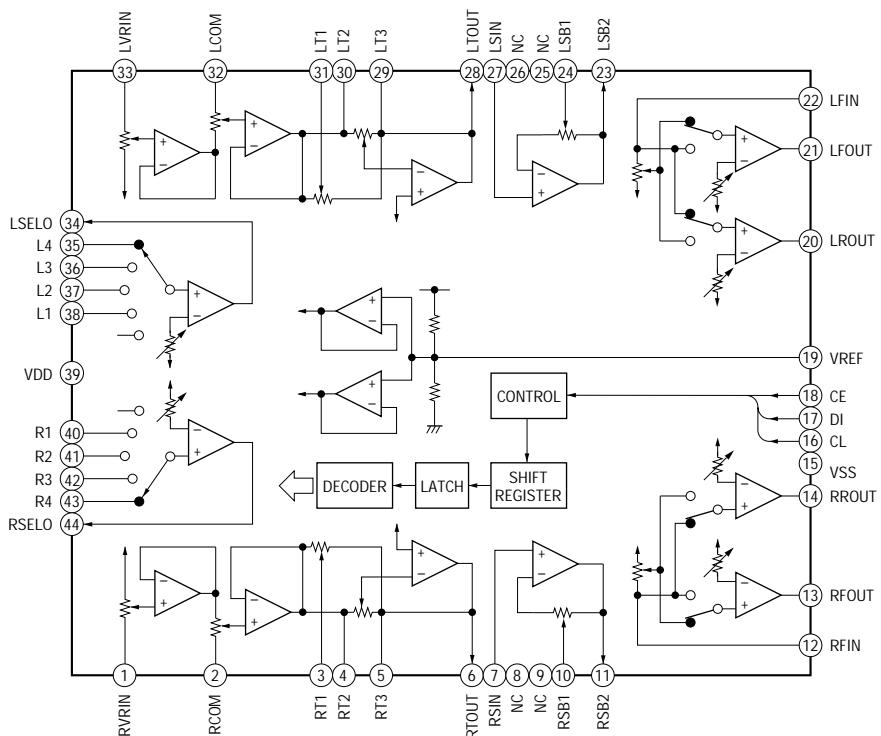

**IC700 TB2118F (EL)**

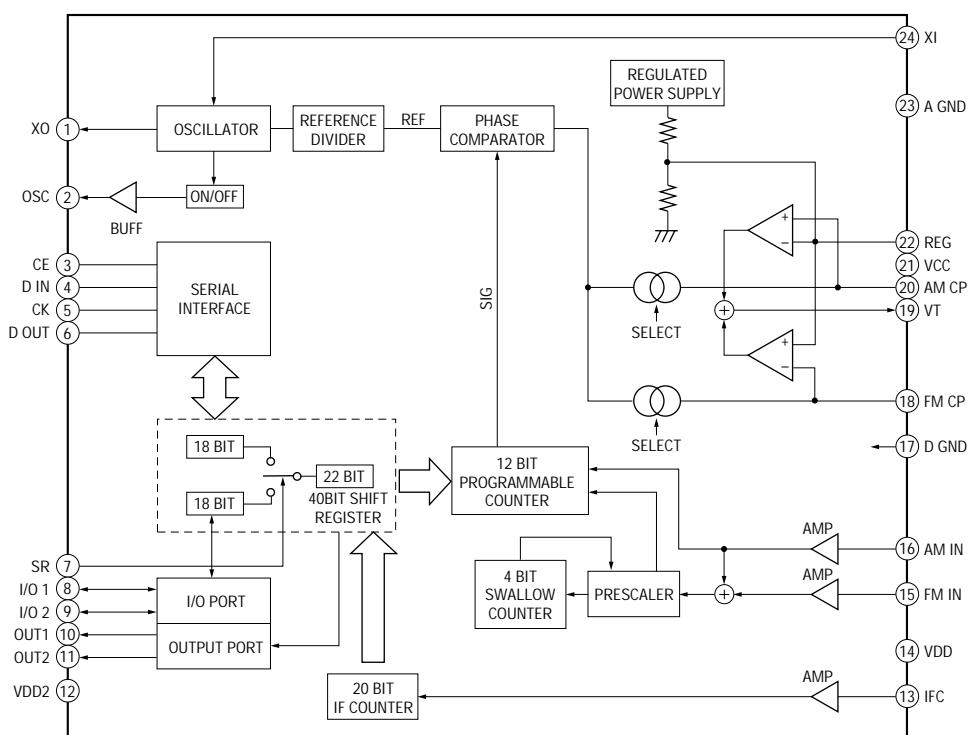

## SECTION 4 EXPLODED VIEWS

### NOTE:

- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked “\*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- -XX and -X mean standardized parts, so they may have some difference from the original one.

### • Color Indication of Appearance Parts

Example :


KNOB, BALANCE (WHITE) ... (RED)  
 ↑   ↑  
 Parts Color Cabinet's Color

- Accessories and packing materials and hardware (# mark) list are given in the last of this parts list.

The components identified by mark  $\triangle$  or dotted line with mark  $\triangle$  are critical for safety. Replace only with part number specified.


Les composants identifiés par une marque  $\triangle$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

### 4-1. CHASSIS SECTION

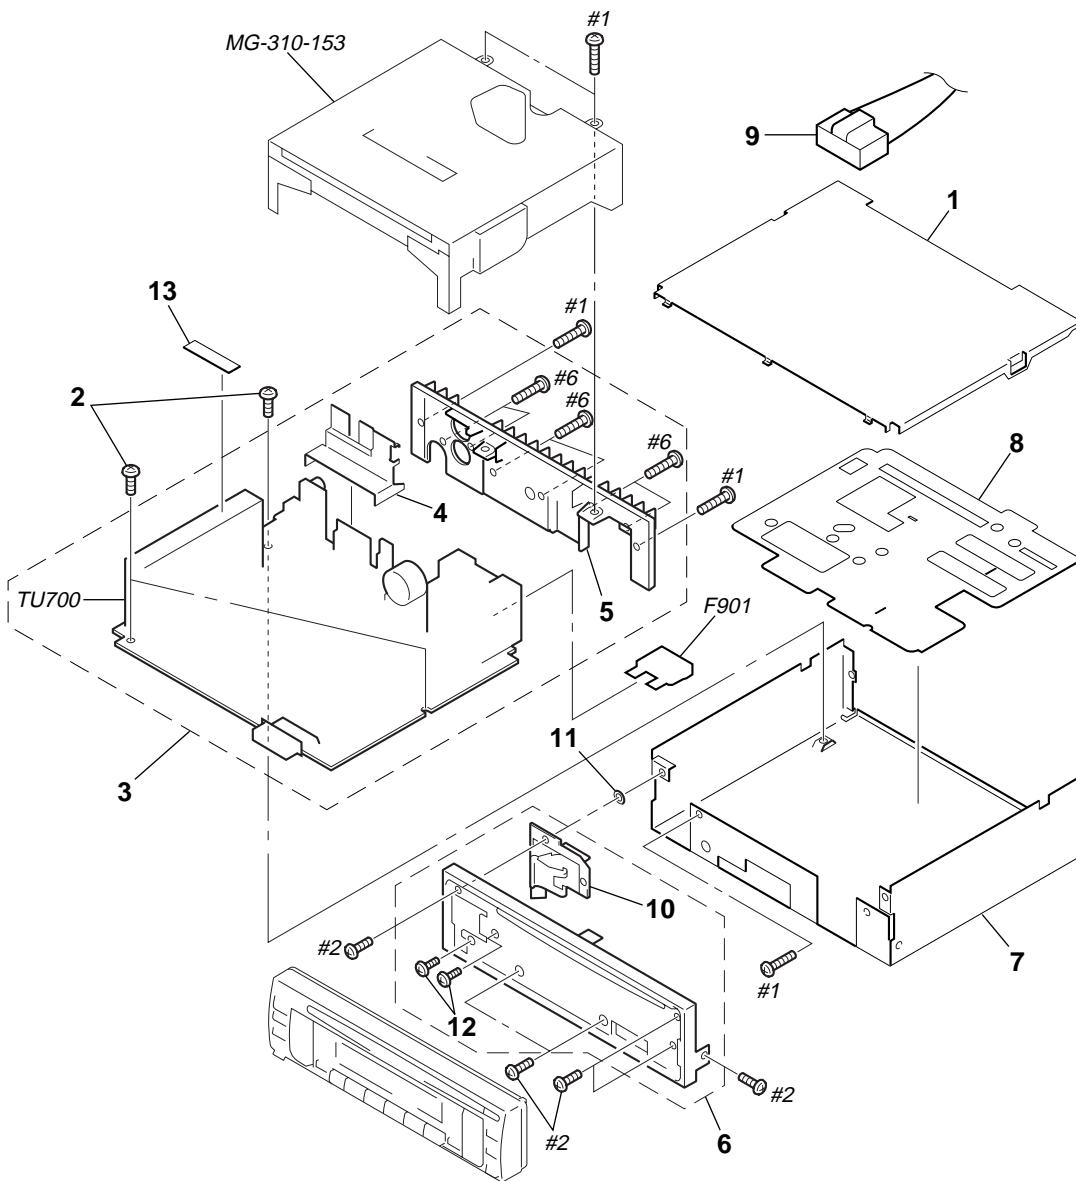


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
* 1	3-034-437-02	COVER		* 8	3-034-455-03	SHEET (INSULATING)	
2	3-376-464-11	SCREW (+PTT 2.6X6), GROUND POINT		9	1-792-194-31	CORD (WITH CONNECTOR) (POWER)	
* 3	A-3294-815-A	MAIN BOARD, COMPLETE (3900)		10	X-3367-636-1	LOCK ASSY	
* 3	A-3294-817-A	MAIN BOARD, COMPLETE (1300)		11	3-038-300-01	SPACER (WASHER)	
* 3	A-3294-819-A	MAIN BOARD, COMPLETE (3800)		12	3-042-244-11	SCREW (T)	
* 4	3-043-234-01	BRACKET (IC)		13	3-360-123-01	PLATE (C), GROUND	
* 5	3-043-233-01	HEAT SINK		F901	1-532-877-11	FUSE (BLADE TYPE) (AUTO FUSE) 10A	
6	X-3377-240-4	PANEL ASSY, SUB		TU700	A-3220-689-A	TUNER UNIT (TUX-010/2(E))	
* 7	3-034-436-03	CHASSIS					

## 4-2. FRONT PANEL SECTION

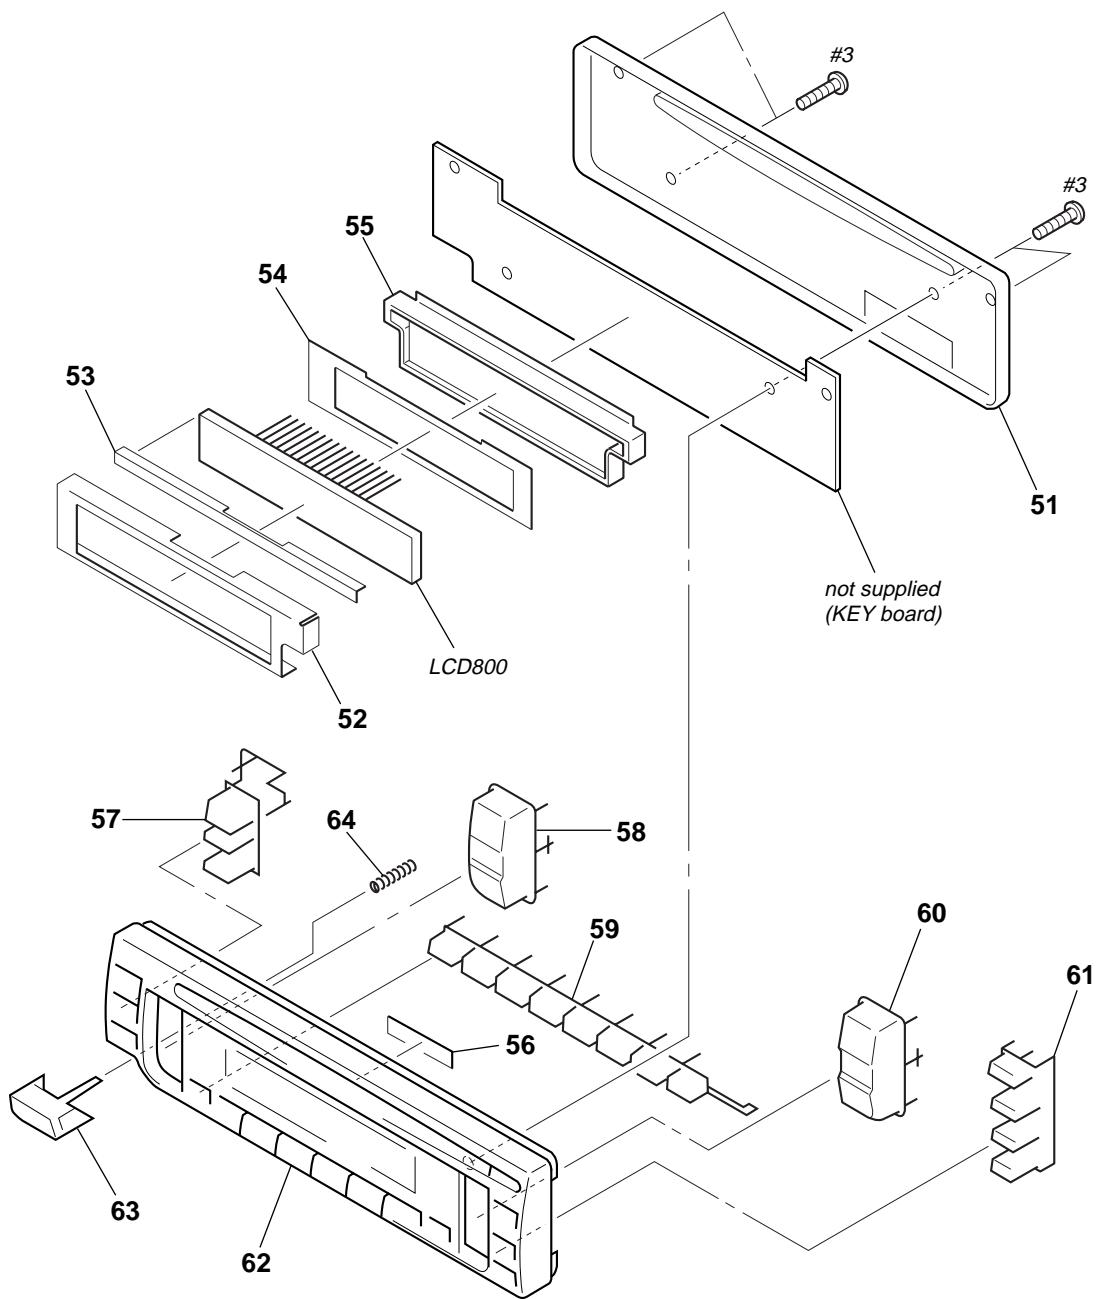

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	3-035-311-02	PANEL, BACK		60	3-034-451-04	BUTTON (AMS)	
* 52	3-034-440-02	PLATE (LCD), GROUND		61	3-034-445-11	BUTTON (EJECT)	
* 53	3-034-454-01	SHET (LCD)		62	X-3378-996-1	PANEL ASSY, FRONT (1300)	
* 54	3-034-453-01	SHET (DIFFUSION)		62	X-3378-998-1	PANEL ASSY, FRONT (3800)	
* 55	X-3377-104-1	HOLDER (LCD) ASSY		62	X-3378-999-1	PANEL ASSY, FRONT (3900)	
56	3-035-316-01	SHEET (GUIDE)		63	3-035-312-01	BUTTON (RELEASE)	
57	3-045-627-11	BUTTON (SOURCE)		64	3-008-667-01	SPRING (RELEASE)	
58	3-034-450-04	BUTTON (+-)		LCD800	1-803-966-11	DISPLAY PANEL, LIQUID CRYSTAL	
59	3-034-443-02	BUTTON (6 KEY)					


**4-3. CD MECHANISM SECTION (1)**  
**(MG-310-153)**

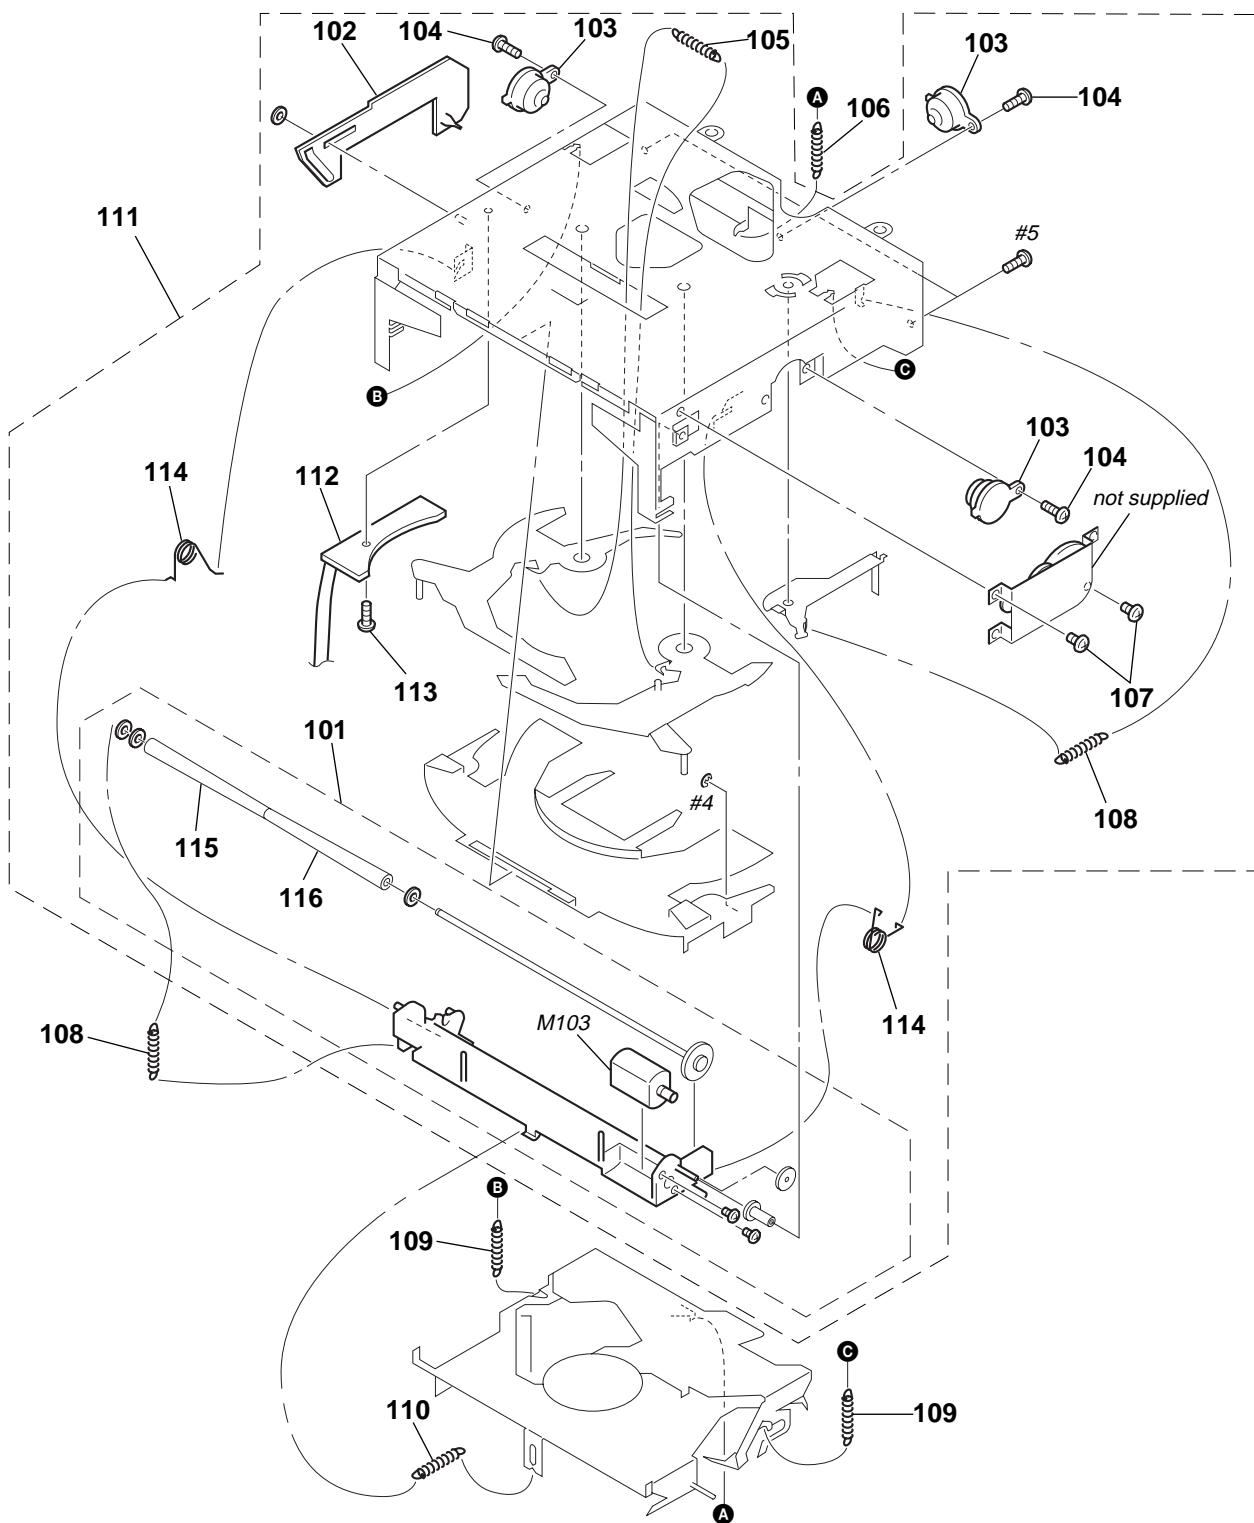

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	X-3378-793-1	ARM ASSY, ROLLER		110	3-032-352-01	SPRING (ANGLE), TENSION	
* 102	3-032-327-02	LEVER (LE.L)		111	X-3378-335-3	CHASSIS (M) COMPLETE ASSY	
103	3-037-492-01	DAMPER (P)		* 112	1-670-827-11	SW BOARD	
104	3-033-808-01	SCREW (M2X4.0)		113	3-033-807-01	SCREW (M2X3.0)	
105	3-042-644-01	SPRING (LEVER DLR)		114	3-032-359-01	SPRING (ROLLER)	
106	3-032-373-01	SPRING (SPM), TENSION		115	3-039-600-02	ROLLER (SS)	
107	3-033-806-01	SCREW (M2X2.5)		116	3-933-152-02	ROLLER (S)	
108	3-042-642-01	SPRING (LEVER D)		M103	X-3378-888-1	MOTOR ASSY, LOADING (LOADING)	
109	3-032-351-01	SPRING (FL), TENSION					

#### **4-4. CD MECHANISM SECTION (2)**

(MG-310-153)

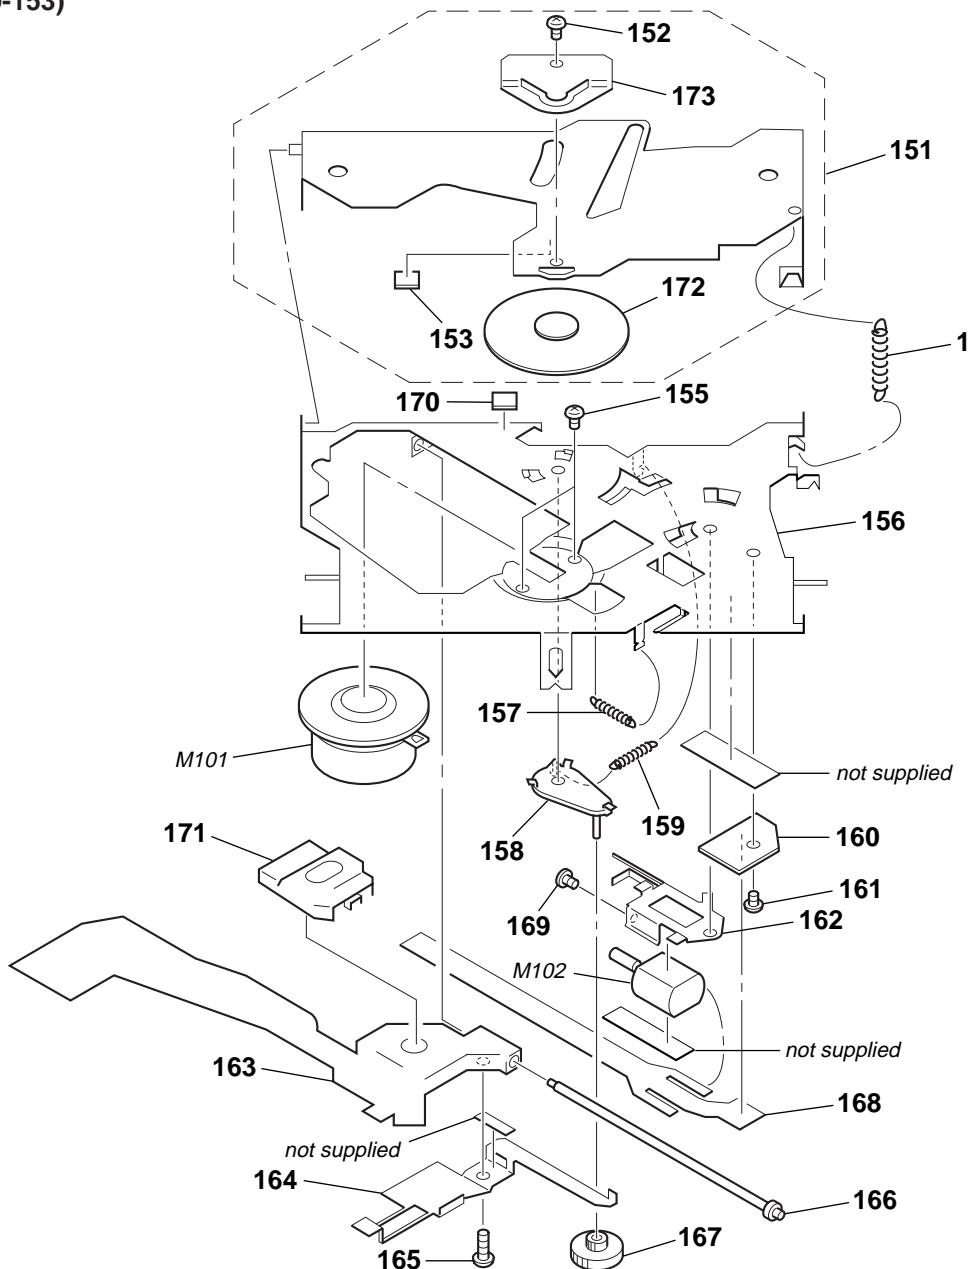

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
151	A-3301-693-A	ARM ASSY, CHUCKING		164	3-032-345-02	RACK (FEED)	
152	3-033-805-01	SCREW (M2X2.0)		165	3-033-804-01	SCREW (+PTP 1.7X4)	
* 153	3-027-473-01	CUSHION (EJ2)		166	3-032-358-01	SHAFT (SLED GUIDE)	
154	3-032-353-01	SPRING (CH), TENSION		167	3-032-344-01	GEAR (WORM WHEEL)	
155	3-033-803-01	SCREW (M1.7X2.5)		168	1-673-761-11	MOTOR FLEXIBLE BOARD	
* 156	X-3376-720-2	CHASSIS (OP) ASSY		169	3-366-892-01	SCREW (M1.4X1.1)	
157	3-032-373-01	SPRING (SPM), TENSION		* 170	3-037-490-01	CUSHION (DH)	
* 158	X-3376-724-1	LEVER (WORM WHEEL) ASSY		171	3-042-739-01	COVER (P)	
159	3-042-642-01	SPRING (LEVER D)		* 172	3-384-918-01	RETAINER (DISC)	
* 160	1-670-828-11	MOTOR BOARD		173	3-931-894-01	BRACKET (CP)	
161	3-033-807-01	SCREW (M2X3.0)		M101	X-3373-096-1	MOTOR ASSY, SPINDLE (SPINDLE)	
162	3-032-341-01	BRACKET (SL MOTOR)		M102	X-3377-704-1	MOTOR ASSY, SLED (SLED)	
△ 163	X-3378-023-1	PICK-UP ASSY, OPTICAL					

# SECTION 5

## ELECTRICAL PARTS LIST

KEY

**NOTE:**

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- **RESISTORS**  
All resistors are in ohms.  
METAL: Metal-film resistor.  
METAL OXIDE: Metal oxide-film resistor.  
F: nonflammable

- Items marked “\*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- **SEMICONDUCTORS**  
In each case, u :  $\mu$ , for example:  
uA.. :  $\mu$ A.. uPA.. :  $\mu$ PA..  
uPB.. :  $\mu$ PB.. uPC.. :  $\mu$ PC.. uPD.. :  $\mu$ PD..
- **CAPACITORS**  
uF :  $\mu$ F
- **COILS**  
uH :  $\mu$ H

The components identified by mark  $\triangle$  or dotted line with mark  $\triangle$  are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque  $\triangle$  sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board.

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
		KEY BOARD *****				LSW813	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (DSPL)			
*	3-034-440-02	PLATE (LCD), GROUND				LSW814	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (1/REPEAT)			
*	3-034-453-01	SHEET (DIFFUSION)				LSW815	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (2/SHUF)			
*	3-034-454-01	SHEET (LCD)				LSW816	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (3)			
		< CAPACITOR >				LSW817	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (4)			
C851	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	LSW818	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (5)			
C853	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	LSW819	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (6)			
C854	1-115-412-11	CERAMIC CHIP	680PF	5%	25V (1300/3800)			< PILOT LAMP >			
C854	1-162-847-11	CERAMIC CHIP	0.047uF	20%	16V (3900)	PL801	1-517-968-21	LAMP, PILOT			
		< CONNECTOR >				PL802	1-517-968-21	LAMP, PILOT			
CN800	1-785-773-21	PIN, CONNECTOR 15P						< RESISTOR >			
		< DIODE >				R801	1-216-821-11	METAL CHIP	1K	5%	1/16W
D801	8-719-068-84	DIODE	MAZL075D0LS0-TX/L			R802	1-216-823-11	METAL CHIP	1.5K	5%	1/16W
D851	8-719-044-91	DIODE	HZU4.7B2 (3900)			R803	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
D851	8-719-976-99	DIODE	HZU5.1B2TRF (1300/3800)			R804	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
		< IC >				R805	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
IC800	8-759-330-60	IC	LC75822WD			R806	1-216-831-11	METAL CHIP	6.8K	5%	1/16W
IC850	8-749-012-25	IC	RS-170-TU (3900)			R807	1-216-835-11	METAL CHIP	15K	5%	1/16W
		< LIQUID CRYSTAL DISPLAY >				R808	1-216-839-11	METAL CHIP	33K	5%	1/16W
LCD800	1-803-966-11	DISPLAY PANEL, LIQUID CRYSTAL				R809	1-216-845-11	METAL CHIP	100K	5%	1/16W
		< SWITCH >				R811	1-216-821-11	METAL CHIP	1K	5%	1/16W
LSW801	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (OFF)				R812	1-216-823-11	METAL CHIP	1.5K	5%	1/16W
LSW802	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (SOURCE)				R813	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
LSW803	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (MODE)				R814	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
LSW804	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (SOUND)				R815	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
LSW805	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (+)				R816	1-216-831-11	METAL CHIP	6.8K	5%	1/16W
LSW806	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (-)				R817	1-216-835-11	METAL CHIP	15K	5%	1/16W
LSW807	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (SEEK/AMS ►►►► +)				R818	1-216-839-11	METAL CHIP	33K	5%	1/16W
LSW808	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (SEEK/AMS ◀◀◀◀ -)				R830	1-216-025-11	RES-CHIP	100	5%	1/10W
LSW809	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (SENS/BTM)				R831	1-216-025-11	RES-CHIP	100	5%	1/10W
LSW810	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (ATT)				R832	1-216-025-11	RES-CHIP	100	5%	1/10W
LSW811	1-762-619-21	SWITCH, KEY BOARD (WITH LED) ( $\triangle$ )				R833	1-216-025-11	RES-CHIP	100	5%	1/10W
LSW812	1-762-619-21	SWITCH, KEY BOARD (WITH LED) (D-BASS)				R834	1-216-025-11	RES-CHIP	100	5%	1/10W
						R835	1-216-033-00	METAL CHIP	220	5%	1/10W
						R851	1-216-045-00	METAL CHIP	680	5%	1/10W
						R852	1-216-821-11	METAL CHIP	1K	5%	1/16W
						R853	1-218-733-11	METAL CHIP	51K	0.5%	1/16W
											*****

# MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark	
*	A-3294-815-A	MAIN BOARD, COMPLETE (3900)		C403	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	
*	A-3294-817-A	MAIN BOARD, COMPLETE (1300)		C404	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	
*	A-3294-819-A	MAIN BOARD, COMPLETE (3800)	*****	C405	1-124-779-00	ELECT CHIP	10uF 20% 16V	
				C406	1-162-967-11	CERAMIC CHIP	0.0033uF 10% 50V	
				C407	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V	
*	3-043-233-01	HEAT SINK		C408	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	
*	3-043-234-01	BRACKET (IC)		C409	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	
	7-685-794-09	SCREW +PTT 2.6X10 (S)		C410	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	
		< CAPACITOR >		C411	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	
				C412	1-124-779-00	ELECT CHIP	10uF 20% 16V	
C101	1-117-681-11	ELECT CHIP	100uF 20%	16V	C413	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C102	1-109-982-11	CERAMIC CHIP	1uF 10%	10V	C414	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C103	1-162-970-11	CERAMIC CHIP	0.01uF 10%	25V	C415	1-117-681-11	ELECT CHIP	100uF 20% 16V
C104	1-124-779-00	ELECT CHIP	100uF 20%	16V	C420	1-124-779-00	ELECT CHIP	10uF 20% 16V
C105	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C422	1-107-823-11	CERAMIC CHIP	0.47uF 10% 16V
C106	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C424	1-164-230-11	CERAMIC CHIP	220PF 5% 50V
C108	1-162-964-11	CERAMIC CHIP	0.001uF 10%	50V	C425	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C110	1-162-968-11	CERAMIC CHIP	0.0047uF 10%	50V	C430	1-124-779-00	ELECT CHIP	10uF 20% 16V
C111	1-162-968-11	CERAMIC CHIP	0.0047uF 10%	50V	C431	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C112	1-115-412-11	CERAMIC CHIP	680PF 5%	25V	C432	1-107-823-11	CERAMIC CHIP	0.47uF 10% 16V
C113	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C451	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C114	1-164-227-11	CERAMIC CHIP	0.022uF 10%	25V	C452	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C115	1-109-982-11	CERAMIC CHIP	1uF 10%	10V	C453	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C116	1-117-681-11	ELECT CHIP	100uF 20%	16V	C454	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C117	1-109-982-11	CERAMIC CHIP	1uF 10%	10V	C455	1-124-779-00	ELECT CHIP	10uF 20% 16V
C118	1-162-970-11	CERAMIC CHIP	0.01uF 10%	25V	C456	1-162-967-11	CERAMIC CHIP	0.0033uF 10% 50V
C119	1-115-565-11	CERAMIC CHIP	2.2uF 10%	10V	C457	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V
C120	1-162-959-11	CERAMIC CHIP	330PF 5%	50V	C458	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C121	1-164-315-11	CERAMIC CHIP	470PF 5%	50V	C459	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C122	1-164-227-11	CERAMIC CHIP	0.022uF 10%	25V	C460	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C123	1-165-176-11	CERAMIC CHIP	0.047uF 10%	16V	C461	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C124	1-162-968-11	CERAMIC CHIP	0.0047uF 10%	50V	C464	1-164-230-11	CERAMIC CHIP	220PF 5% 50V
C125	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C465	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C126	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C470	1-124-779-00	ELECT CHIP	10uF 20% 16V
C127	1-165-176-11	CERAMIC CHIP	0.047uF 10%	16V	C472	1-107-823-11	CERAMIC CHIP	0.47uF 10% 16V
C128	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C480	1-124-779-00	ELECT CHIP	10uF 20% 16V
C129	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C481	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C130	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C482	1-107-823-11	CERAMIC CHIP	0.47uF 10% 16V
C131	1-162-979-11	CERAMIC CHIP	0.0027uF 10%	50V	C500	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C132	1-164-227-11	CERAMIC CHIP	0.022uF 10%	25V	C501	1-126-768-11	ELECT	2200uF 20% 16V
C133	1-117-681-11	ELECT CHIP	100uF 20%	16V	C502	1-115-339-11	CERAMIC CHIP	0.1uF 10% 50V
C134	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C504	1-165-319-11	CERAMIC CHIP	0.1uF 10% 50V
C135	1-117-681-11	ELECT CHIP	100uF 20%	16V	C505	1-165-319-11	CERAMIC CHIP	0.1uF 10% 50V
C136	1-117-681-11	ELECT CHIP	100uF 20%	16V	C506	1-126-204-11	ELECT CHIP	47uF 20% 16V
C138	1-117-681-11	ELECT CHIP	100uF 20%	16V	C509	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C139	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C510	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C140	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C511	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C141	1-109-982-11	CERAMIC CHIP	1uF 10%	10V	C513	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C147	1-110-501-11	CERAMIC CHIP	0.33uF 10%	16V	C516	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C148	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C518	1-107-823-11	CERAMIC CHIP	0.47uF 10% 16V
C149	1-162-964-11	CERAMIC CHIP	0.001uF 10%	50V	C519	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V
C154	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V	C520	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C401	1-109-982-11	CERAMIC CHIP	1uF 10%	10V	C522	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C402	1-107-826-11	CERAMIC CHIP	0.1uF 10%	16V				

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark
C524	1-117-681-11	ELECT CHIP	100uF	20%	16V	CNJ103	1-770-637-11	CONNECTOR, FFC/FPC 6P	
C532	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	CNP500	1-774-701-11	PIN, CONNECTOR 16P	
C533	1-124-779-00	ELECT CHIP	10uF	20%	16V				< JACK >
C534	1-126-916-11	ELECT	1000uF	20%	6.3V	CNP400	1-774-698-11	JACK, PIN 2P (AUDIO OUT REAR)	
C535	1-115-467-11	CERAMIC CHIP	0.22uF	10%	10V				< DIODE >
C550	1-165-112-11	CERAMIC CHIP	0.33uF		16V	D501	8-719-049-38	DIODE 1N5404TU	
C551	1-117-681-11	ELECT CHIP	100uF	20%	16V	D502	8-719-073-01	DIODE MA111-TX	
C602	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	D503	8-719-073-01	DIODE MA111-TX	
C603	1-162-916-11	CERAMIC CHIP	12PF	5%	50V	D504	8-719-019-00	DIODE U1GC44-TE12R	
C604	1-162-917-11	CERAMIC CHIP	15PF	5%	50V	D505	8-719-019-00	DIODE U1GC44-TE12R	
C606	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	D506	8-719-064-03	DIODE HZU16B2TRF	
C607	1-107-823-11	CERAMIC CHIP	0.47uF	10%	16V	D507	8-719-977-12	DIODE HZU6.8B3TRF	
C608	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	D508	8-719-422-67	DIODE HZU6.8B1TRF	
C614	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	D509	8-719-975-40	DIODE RB411D-T146	
C618	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	D510	8-719-060-29	DIODE HZU7.5B1	
C619	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	D511	8-719-073-01	DIODE MA111-TX	
C628	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	D512	8-719-423-07	DIODE HZU10B1TRF	
C707	1-124-779-00	ELECT CHIP	10uF	20%	16V	D513	8-719-071-72	DIODE HZU8.2B3TRF	
C711	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	D514	8-719-047-98	DIODE HZU5.6B2TRF	
C717	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D516	8-719-019-00	DIODE U1GC44-TE12R	
C718	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V (1300)	D517	8-719-019-00	DIODE U1GC44-TE12R	
C718	1-164-245-11	CERAMIC CHIP	0.015uF	10%	25V (3800/3900)	D518	8-719-073-01	DIODE MA111-TX	
C719	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V (1300)	D519	8-719-073-01	DIODE MA111-TX	
C719	1-164-245-11	CERAMIC CHIP	0.015uF	10%	25V (3800/3900)	D520	8-719-053-18	DIODE 1SR154-400	
C720	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	D521	8-719-053-18	DIODE 1SR154-400	
C721	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	D522	8-719-053-18	DIODE 1SR154-400	
C724	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	D523	8-719-053-18	DIODE 1SR154-400	
C728	1-164-315-11	CERAMIC CHIP	470PF	5%	50V	D524	8-719-053-18	DIODE 1SR154-400	
C730	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D525	8-719-053-18	DIODE 1SR154-400	
C731	1-107-823-11	CERAMIC CHIP	0.47uF	10%	16V	D526	8-719-053-18	DIODE 1SR154-400	
C732	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D527	8-719-053-18	DIODE 1SR154-400	
C733	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	D550	8-719-062-38	DIODE HZU3.92TRF	
C734	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	D551	8-719-073-01	DIODE MA111-TX	
C735	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	D601	8-719-069-58	DIODE UDZS-TE17-7.5B	
C736	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V	D602	8-719-914-44	DIODE DAP202K-T-146	
C737	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V	D603	8-719-069-58	DIODE UDZS-TE17-7.5B (3900)	
C738	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V	D605	8-719-069-58	DIODE UDZS-TE17-7.5B	
C739	1-109-982-11	CERAMIC CHIP	1uF	10%	10V	D606	8-719-069-58	DIODE UDZS-TE17-7.5B	
C740	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	D607	8-719-069-58	DIODE UDZS-TE17-7.5B	
C741	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D608	8-719-069-58	DIODE UDZS-TE17-7.5B	
C742	1-124-779-00	ELECT CHIP	10uF	20%	16V	D610	8-719-069-58	DIODE UDZS-TE17-7.5B	
C743	1-124-779-00	ELECT CHIP	10uF	20%	16V	D611	8-719-069-58	DIODE UDZS-TE17-7.5B	
C744	1-162-911-11	CERAMIC CHIP	6PF	0.5PF	50V				< IC >
C745	1-162-911-11	CERAMIC CHIP	6PF	0.5PF	50V	IC101	8-759-574-26	IC MN6627481RPMFA	
C746	1-162-907-11	CERAMIC CHIP	2PF	0.25PF	50V	IC102	8-759-574-25	IC AN8835SB-E1	
						IC103	8-759-574-24	IC BA5984FP-E2	
						IC400	8-759-487-82	IC LC75374E	
						IC500	8-759-486-44	IC TDA7386	
						IC600	8-759-661-44	IC uPD780058GC-133-8BT	

\* CN600 1-580-756-21 PIN, CONNECTOR (SMD) 7P  
CN601 1-785-772-31 PLUG, CONNECTOR 15P  
CNJ102 1-770-646-11 CONNECTOR, FFC/FPC 16P

# MAIN

Ref. No.	Part No.	Description		Remark	Ref. No.	Part No.	Description		Remark
IC601	8-759-443-41	IC	RH5VL40AA-T1C		R106	1-216-864-11	METAL CHIP	0	5% 1/16W
IC700	8-759-586-59	IC	TB2118F(EL)		R107	1-216-833-11	RES-CHIP	10K	5% 1/16W
< JACK >									
J701	1-785-503-11	JACK (ANTENNA)			R108	1-216-845-11	METAL CHIP	100K	5% 1/16W
< JUMPER RESISTOR >									
JC1	1-216-295-00	SHORT	0		R109	1-216-833-11	RES-CHIP	10K	5% 1/16W
JC3	1-216-295-00	SHORT	0		R110	1-216-833-11	RES-CHIP	10K	5% 1/16W
JC5	1-216-295-00	SHORT	0		R111	1-216-833-11	RES-CHIP	10K	5% 1/16W
JC6	1-216-295-00	SHORT	0		R112	1-216-833-11	RES-CHIP	10K	5% 1/16W
< COIL >									
L501	1-419-476-11	COIL, CHOKE	250uH		R113	1-216-833-11	RES-CHIP	10K	5% 1/16W
L601	1-412-058-11	INDUCTOR	10uH		R114	1-216-821-11	METAL CHIP	1K	5% 1/16W
L728	1-410-989-11	INDUCTOR CHIP	0.47uH		R115	1-216-821-11	METAL CHIP	1K	5% 1/16W
< TRANSISTOR >									
Q101	8-729-141-48	TRANSISTOR	2SB624T1-BV345		R116	1-216-847-11	METAL CHIP	150K	5% 1/16W
Q401	8-729-047-71	TRANSISTOR	FMG12-T-148		R117	1-216-839-11	METAL CHIP	33K	5% 1/16W
Q402	8-729-047-71	TRANSISTOR	FMG12-T-148		R119	1-216-817-11	METAL CHIP	470	5% 1/16W
Q403	8-729-047-71	TRANSISTOR	FMG12-T-148		R120	1-216-845-11	METAL CHIP	100K	5% 1/16W
Q501	8-729-922-47	TRANSISTOR	2SB1184-TLR		R121	1-216-001-00	METAL CHIP	10	5% 1/10W
Q502	8-729-429-92	TRANSISTOR	XN1211-TX		R122	1-216-836-11	METAL CHIP	18K	5% 1/16W
Q503	8-729-922-47	TRANSISTOR	2SB1184-TLR		R123	1-216-840-11	METAL CHIP	39K	5% 1/16W
Q504	8-729-402-13	TRANSISTOR	XN1501-TX		R124	1-216-848-11	METAL CHIP	180K	5% 1/16W
Q505	8-729-922-47	TRANSISTOR	2SB1184-TLR		R125	1-216-849-11	METAL CHIP	220K	5% 1/16W
Q507	8-729-429-92	TRANSISTOR	XN1211-TX		R126	1-216-001-00	METAL CHIP	10	5% 1/10W
Q509	8-729-921-49	TRANSISTOR	2SD1760F5-TLR		R127	1-216-001-00	METAL CHIP	10	5% 1/10W
Q510	8-729-900-53	TRANSISTOR	DTC114EKA-T146		R128	1-216-308-00	METAL CHIP	4.7	5% 1/10W
Q511	8-729-921-49	TRANSISTOR	2SD1760F5-TLR		R129	1-216-013-00	METAL CHIP	33	5% 1/10W
Q512	8-729-020-67	TRANSISTOR	XN1A312-TX		R130	1-216-845-11	METAL CHIP	100K	5% 1/16W
Q513	8-729-019-00	TRANSISTOR	2SD2394-G		R131	1-216-001-00	METAL CHIP	10	5% 1/10W
Q514	8-729-020-67	TRANSISTOR	XN1A312-TX		R132	1-216-308-00	METAL CHIP	4.7	5% 1/10W
Q515	8-729-921-49	TRANSISTOR	2SD1760F5-TLR		R133	1-216-833-11	RES-CHIP	10K	5% 1/16W
Q516	8-729-026-49	TRANSISTOR	2SA1037AK-T146-QR		R134	1-216-841-11	METAL CHIP	47K	5% 1/16W
Q517	8-729-120-28	TRANSISTOR	2SC2412K-T-146-QR		R135	1-216-833-11	RES-CHIP	10K	5% 1/16W
Q550	8-729-920-21	TRANSISTOR	DTC314TK-T-146		R136	1-216-845-11	METAL CHIP	100K	5% 1/16W
Q551	8-729-027-38	TRANSISTOR	DTA144EKA-T146		R137	1-216-829-11	METAL CHIP	4.7K	5% 1/16W
Q601	8-729-027-23	TRANSISTOR	DTA114EKA-T146		R138	1-216-833-11	RES-CHIP	10K	5% 1/16W
Q701	8-729-020-67	TRANSISTOR	XN1A312-TX		R139	1-216-849-11	METAL CHIP	220K	5% 1/16W
Q702	8-729-020-67	TRANSISTOR	XN1A312-TX		R144	1-216-829-11	METAL CHIP	4.7K	5% 1/16W
Q703	8-729-020-67	TRANSISTOR	XN1A312-TX		R145	1-216-829-11	METAL CHIP	4.7K	5% 1/16W
Q704	8-729-106-60	TRANSISTOR	2SB1132-T101-QR		R146	1-216-833-11	RES-CHIP	10K	5% 1/16W
Q705	8-729-900-53	TRANSISTOR	DTC114EKA-T146		R148	1-216-826-11	METAL CHIP	2.7K	5% 1/16W
< RESISTOR >									
R101	1-216-009-11	RES-CHIP	22	5%	R149	1-216-833-11	RES-CHIP	10K	5% 1/16W
R102	1-216-843-11	METAL CHIP	68K	5%	R150	1-216-849-11	METAL CHIP	220K	5% 1/16W
R103	1-216-833-11	RES-CHIP	10K	5%	R201	1-216-013-00	METAL CHIP	33	5% 1/10W
R104	1-216-833-11	RES-CHIP	10K	5%	R401	1-220-158-11	RES-CHIP	3.6K	5% 1/16W
R105	1-216-841-11	METAL CHIP	47K	5%	R402	1-216-150-11	RES-CHIP	10	5% 1/8W
					R406	1-216-837-11	METAL CHIP	22K	5% 1/16W
					R420	1-216-837-11	METAL CHIP	22K	5% 1/16W
					R421	1-216-813-11	METAL CHIP	220	5% 1/16W
					R422	1-216-839-11	METAL CHIP	33K	5% 1/16W
					R423	1-216-861-11	METAL CHIP	2.2M	5% 1/16W
					R424	1-216-813-11	METAL CHIP	220	5% 1/16W
					R425	1-216-837-11	METAL CHIP	22K	5% 1/16W
					R430	1-216-837-11	METAL CHIP	22K	5% 1/16W
					R431	1-216-813-11	METAL CHIP	220	5% 1/16W
					R432	1-216-839-11	METAL CHIP	33K	5% 1/16W
					R433	1-216-861-11	METAL CHIP	2.2M	5% 1/16W

Ref. No.	Part No.	Description		Remark	Ref. No.	Part No.	Description		Remark			
R451	1-220-158-11	RES-CHIP	3.6K	5%	1/16W	R613	1-216-821-11	METAL CHIP	1K	5%	1/16W	
R456	1-216-837-11	METAL CHIP	22K	5%	1/16W	R617	1-216-833-11	RES-CHIP	10K	5%	1/16W	
R470	1-216-837-11	METAL CHIP	22K	5%	1/16W	R618	1-216-833-11	RES-CHIP	10K	5%	1/16W	
R471	1-216-813-11	METAL CHIP	220	5%	1/16W	R619	1-216-821-11	METAL CHIP	1K	5%	1/16W	
R472	1-216-839-11	METAL CHIP	33K	5%	1/16W	R621	1-216-845-11	METAL CHIP	100K	5%	1/16W	
R473	1-216-861-11	METAL CHIP	2.2M	5%	1/16W	R623	1-216-845-11	METAL CHIP	100K	5%	1/16W	
R480	1-216-837-11	METAL CHIP	22K	5%	1/16W	R624	1-216-845-11	METAL CHIP	100K	5%	1/16W	
R481	1-216-813-11	METAL CHIP	220	5%	1/16W	R627	1-216-864-11	METAL CHIP	0	5%	1/16W	
R482	1-216-839-11	METAL CHIP	33K	5%	1/16W	R628	1-216-845-11	METAL CHIP	100K	5%	1/16W	
R483	1-216-861-11	METAL CHIP	2.2M	5%	1/16W	R629	1-216-845-11	METAL CHIP	100K	5%	1/16W	
R484	1-216-813-11	METAL CHIP	220	5%	1/16W	R630	1-216-821-11	METAL CHIP	1K	5%	1/16W	
R485	1-216-837-11	METAL CHIP	22K	5%	1/16W	R631	1-216-864-11	METAL CHIP	0	5%	1/16W	
R501	1-216-825-11	METAL CHIP	2.2K	5%	1/16W	R701	1-216-833-11	RES-CHIP	10K	5%	1/16W	
R502	1-216-833-11	RES-CHIP	10K	5%	1/16W	R702	1-216-825-11	METAL CHIP	2.2K	5%	1/16W	
R503	1-218-740-11	METAL CHIP	100K	0.5%	1/16W		1-216-134-00	METAL CHIP	2.2	5%	1/8W	
R504	1-216-845-11	METAL CHIP	100K	5%	1/16W	R709	1-216-049-11	RES-CHIP	1K	5%	1/10W	
R505	1-216-821-11	METAL CHIP	1K	5%	1/16W	R710	1-216-049-11	RES-CHIP	1K	5%	1/10W	
R506	1-216-298-00	METAL CHIP	2.2	5%	1/10W	R711	1-216-833-11	RES-CHIP	10K	5%	1/16W	
R507	1-216-821-11	METAL CHIP	1K	5%	1/16W	R712	1-216-821-11	METAL CHIP	1K	5%	1/16W	
R508	1-216-817-11	METAL CHIP	470	5%	1/16W	R713	1-216-811-11	METAL CHIP	150	5%	1/16W	
R509	1-216-805-11	METAL CHIP	47	5%	1/16W	R714	1-216-835-11	METAL CHIP	15K	5%	1/16W	
R510	1-216-845-11	METAL CHIP	100K	5%	1/16W	R721	1-216-841-11	METAL CHIP	47K	5%	1/16W	
R511	1-216-833-11	RES-CHIP	10K	5%	1/16W	R723	1-216-845-11	METAL CHIP	100K	5%	1/16W	
R512	1-216-833-11	RES-CHIP	10K	5%	1/16W	R724	1-216-851-11	METAL CHIP	330K	5%	1/16W	
R513	1-216-841-11	METAL CHIP	47K	5%	1/16W	R725	1-216-855-11	METAL CHIP	680K	5%	1/16W	
R514	1-216-845-11	METAL CHIP	100K	5%	1/16W	R726	1-216-864-11	METAL CHIP	0	5%	1/16W	
R515	1-216-825-11	METAL CHIP	2.2K	5%	1/16W	R730	1-216-821-11	METAL CHIP	1K	5%	1/16W	
R516	1-216-821-11	METAL CHIP	1K	5%	1/16W	R731	1-216-833-11	RES-CHIP	10K	5%	1/16W	
R517	1-216-821-11	METAL CHIP	1K	5%	1/16W	R732	1-216-834-11	METAL CHIP	12K	5%	1/16W	
R518	1-216-859-11	METAL CHIP	1.5M	5%	1/16W	R733	1-216-834-11	METAL CHIP	12K	5%	1/16W	
R519	1-216-833-11	RES-CHIP	10K	5%	1/16W	R734	1-216-830-11	METAL CHIP	5.6K	5%	1/16W	
R520	1-216-817-11	METAL CHIP	470	5%	1/16W	R735	1-216-832-11	METAL CHIP	8.2K	5%	1/16W	
R521	1-216-833-11	RES-CHIP	10K	5%	1/16W	R736	1-216-809-11	METAL CHIP	100	5%	1/16W	
R522	1-216-841-11	METAL CHIP	47K	5%	1/16W	< NETWORK RESISTOR >						
R524	1-216-825-11	METAL CHIP	2.2K	5%	1/16W	R525	1-216-837-11	METAL CHIP	22K	5%	1/16W	
R526	1-216-210-00	RES-CHIP	3.3K	5%	1/8W	R527	1-216-821-11	METAL CHIP	1K	5%	1/16W	
R527	1-216-821-11	METAL CHIP	1K	5%	1/16W	R528	1-216-210-00	RES-CHIP	3.3K	5%	1/8W	
R528	1-216-210-00	RES-CHIP	3.3K	5%	1/8W	R529	1-216-829-11	METAL CHIP	4.7K	5%	1/16W	
R529	1-216-829-11	METAL CHIP	4.7K	5%	1/16W	RB501	1-233-412-11	RES, CHIP NETWORK	1.0K (3216)			
R530	1-216-206-00	RES-CHIP	2.2K	5%	1/8W		1-233-412-11	RES, CHIP NETWORK	1.0K (3216)			
R531	1-216-206-00	RES-CHIP	2.2K	5%	1/8W		1-233-810-21	RES, CHIP NETWORK	100K (3216)			
R532	1-216-206-00	RES-CHIP	2.2K	5%	1/8W		1-233-412-11	RES, CHIP NETWORK	1.0K (3216)			
R533	1-216-206-00	RES-CHIP	2.2K	5%	1/8W		1-233-412-11	RES, CHIP NETWORK	1.0K (3216)			
R550	1-216-821-11	METAL CHIP	1K	5%	1/16W	RB604	1-233-412-11	RES, CHIP NETWORK	1.0K (3216)			
R601	1-216-853-11	METAL CHIP	470K	5%	1/16W		< SWITCH >					
R603	1-216-845-11	METAL CHIP	100K	5%	1/16W		S600	1-571-532-21	SWITCH, TACTILE (RESET)			
R604	1-216-809-11	METAL CHIP	100	5%	1/16W		S602	1-571-478-11	SWITCH, SLIDE (FREQUENCY SELECT)			
R605	1-216-809-11	METAL CHIP	100	5%	1/16W	TH501	1-803-615-21	THERMISTOR, POSITIVE				
R607	1-216-845-11	METAL CHIP	100K	5%	1/16W		1-803-615-21	THERMISTOR, POSITIVE				
R609	1-216-864-11	METAL CHIP	0	5%	1/16W		< TUNER >					
R611	1-216-821-11	METAL CHIP	1K	5%	1/16W	R612	1-216-821-11	METAL CHIP	1K	5%	1/16W	
R612	1-216-821-11	METAL CHIP	1K	5%	1/16W	TU700	A-3220-689-A	TUNER UNIT (TUX-010/2(E))				

# CDX-1300/3800/3900

**MAIN**

**MOTOR**

**SW**


Ref. No.	Part No.	Description	Remark
< VIBRATOR >			
X100	1-767-621-11	VIBRATOR, CERAMIC (16.93MHz)	
X600	1-781-383-21	VIBRATOR, CERAMIC (5MHz)	
X601	1-567-098-41	VIBRATOR, CRYSTAL (32.768kHz)	
X700	1-781-258-11	VIBRATOR, CRYSTAL (10.25MHz)	
*****			
*	1-670-828-11	MOTOR BOARD	*****
< SWITCH >			
SW5	1-762-946-12	SWITCH, PUSH (1 KEY) (LIMIT)	
*****			
*	1-670-827-11	SW BOARD	*****
< SWITCH >			
SW2	1-762-946-12	SWITCH, PUSH (1 KEY) (DISC IN 1)	
SW3	1-762-946-12	SWITCH, PUSH (1 KEY) (DISC IN 2)	
SW4	1-762-946-12	SWITCH, PUSH (1 KEY) (CHUCKING DET)	
*****			
MISCELLANEOUS			
*****			
9	1-792-194-31	CORD (WITH CONNECTOR) (POWER)	
△163	X-3378-023-1	PICK-UP ASSY, OPTICAL	
168	1-673-761-11	MOTOR FLEXIBLE BOARD	
F901	1-532-877-11	FUSE (BLADE TYPE) (AUTO FUSE) 10A	
M101	X-3373-096-1	MOTOR ASSY, SPINDLE (SPINDLE)	
M102	X-3377-704-1	MOTOR ASSY, SLED (SLED)	
M103	X-3378-888-1	MOTOR ASSY, LOADING (LOADING)	
*****			
ACCESSORIES & PACKING MATERIALS			
*****			
1-418-280-22	REMOTE COMMANDER (RM-X49) (3900)		
3-043-466-11	MANUAL, INSTRUCTION (ENGLISH) (1300)		
3-043-466-21	MANUAL, INSTRUCTION (ENGLISH,SPANISH, TRADITIONAL CHINESE) (3800/3900)		
3-043-467-11	MANUAL, INSTRUCTION, INSTALL (ENGLISH) (1300)		
3-043-467-21	MANUAL, INSTRUCTION, INSTALL (ENGLISH, SPANISH,TRADITIONAL CHINESE) (3800/3900)		
9-939-169-01	HOLDER, BATTERY (for RM-X49) (3900)		
X-3373-926-1	CASE ASSY (XR) (for FRONT PANEL)		
*****			

Ref. No.	Part No.	Description	Remark
< VIBRATOR >			
*****			
#1	7-685-793-09	SCREW +PTT 2.6X8 (S)	HARDWARE LIST
#2	7-685-792-09	SCREW +PTT 2.6X6 (S)	*****
#3	7-685-106-19	SCREW +P 2X10 TYPE 2 NON-SLIT	
#4	7-624-101-04	STOP RING 1.2 (E TYPE)	
#5	7-685-780-01	SCREW +PTT 2X3 (S)	
#6	7-685-794-09	SCREW +PTT 2.6X10 (S)	*****
*****			

## PARTS FOR INSTALLATION AND CONNECTIONS

\*\*\*\*\*

201	3-009-613-21	FRAME
202	3-386-828-01	SCREW, FITTING (3800/3900)
203	3-349-410-01	BUSHING (3800/3900)
204	X-3366-405-1	SCREW ASSY (EXP), FITTING (3800/3900)
205	3-924-961-01	SUPPORT (ND), FITTING (1300)
206	7-682-160-01	SCREW +P 4X6 (1300)
207	3-915-917-01	SCREW (4X12), +T (1300)
208	3-034-435-01	COLLAR
209	3-027-138-01	SPRING, FITTING
210	3-934-325-01	SCREW, +K (5X8) TAPPING
211	1-792-194-31	CORD (WITH CONNECTOR) (POWER)

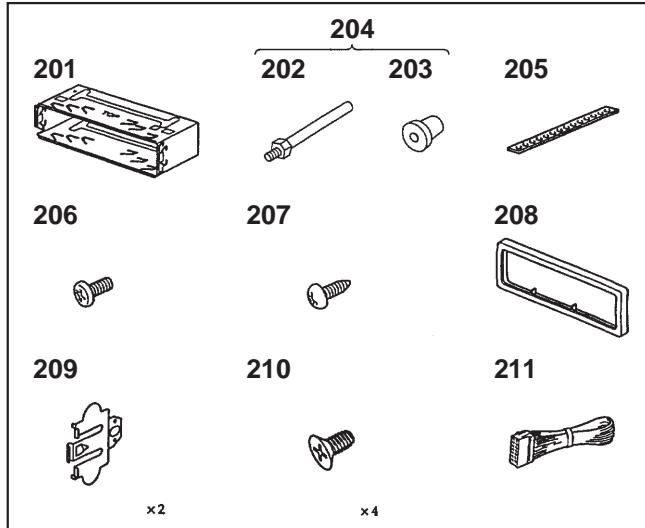

The components identified by mark △ or dotted line with mark △ are critical for safety.  
Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.